




O.P. (MM)	P.T. (MM)
14.7 ± 0.5	2.0 MAX.

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL

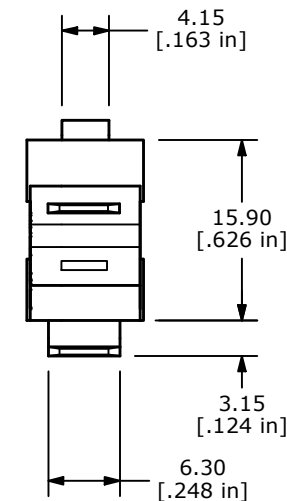

CIRCUIT: SPST  
NORMALLY OPEN

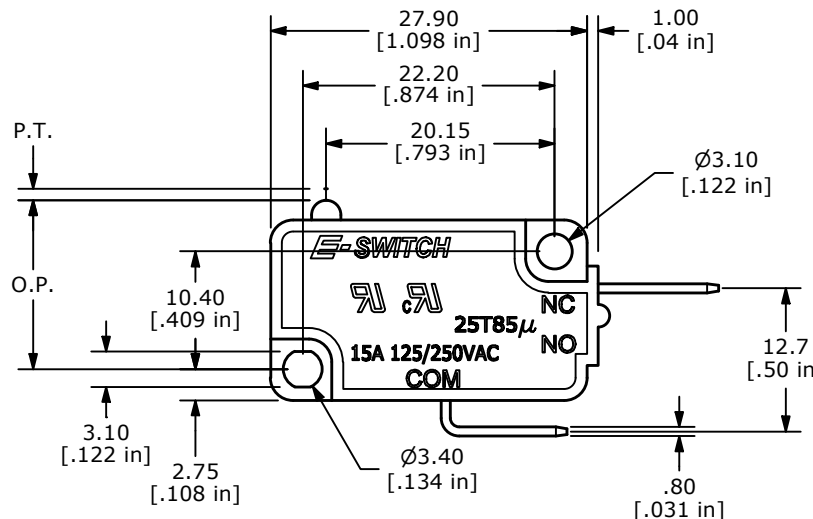

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
  3. RATING: 15A @125/250VAC UL, CUL APPROVED
  - ▲ 4. OPERATING FORCE: 160 ± 40 GRAMS
  5. OPERATING TEMP: -25°C to 85°C
  6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
  7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
  8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
  9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
  10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
  11. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY
G	ECO-102147	NOTE 4: 160+/-40 WAS 160+/- 60	08/10/23	JS

			OBJECT ID 000021006
TITLE LS0851500F160C2B			

<small>THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED</small>				SCALE 3:2	DATE 1/19/2007	DR TN	DWG Q950019	REV G
---	--	--	--	--------------	-------------------	----------	----------------	----------