
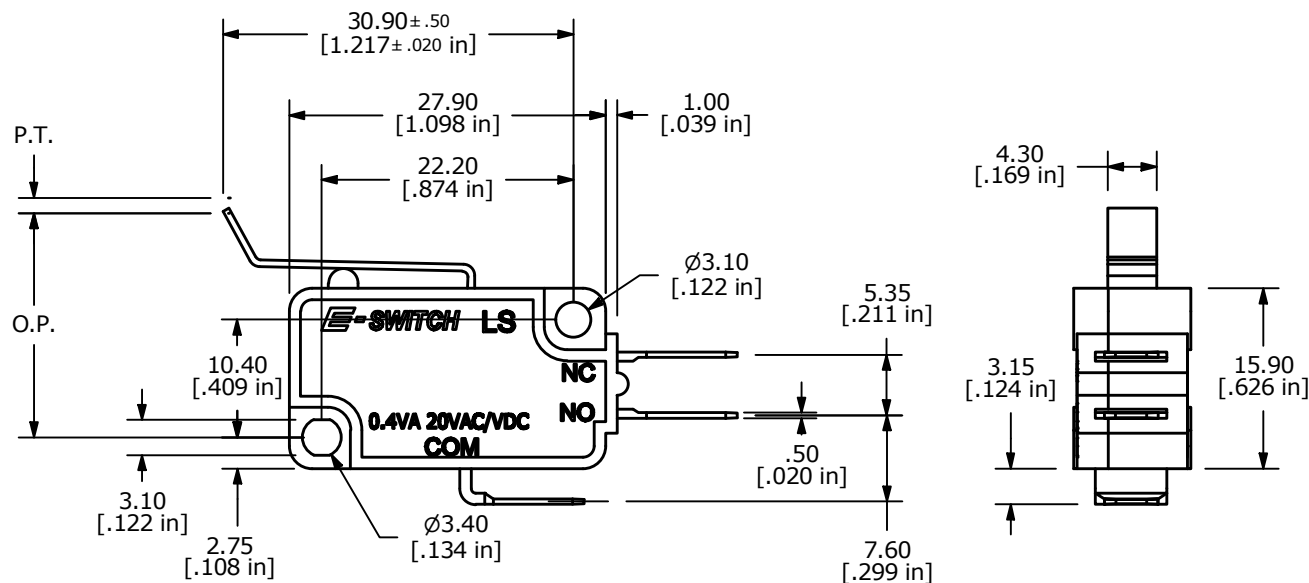


O.P. (MM)	P.T. (MM)
19.7±0.8	2.95 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X±0.4
X.XX±0.25
 3. RATING: 0.4VA @20VAC OR DC
 - ▲ 4. OPERATING FORCE: 100± 30 GRAMS
 5. OPERATING TEMP: -25°C TO 85°C
 6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
 7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
 8. INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
 9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
 10. CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
 11. ▲ DENOTES CRITICAL PARAMETER.
 - ▲ 12. CONTACTS: 10 MICRO INCHES MINIMUM GOLD PLATING (P/N Q990000)

REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-100826	REMOVE VDE RATING AND LOGO	04/08/22	JS



OBJECT ID
000021007

TITLE LS085R107F100C1A		SCALE 3:2	DATE 10/17/2005	DR PH	DWG Q950020	REV C
---------------------------	--	--------------	--------------------	----------	----------------	----------

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED