



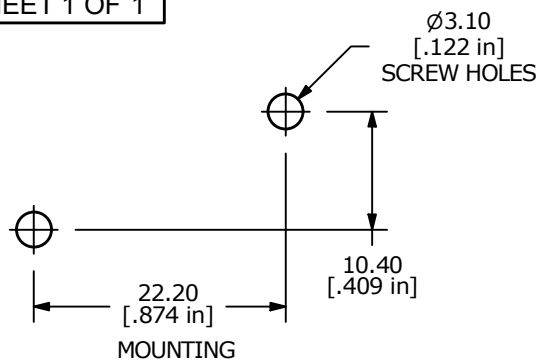





▲	O.P. (MM)	P.T. (MM)
	15.3±2.0	6.9 MAX.

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X $\pm$ 0.4
 X.XX $\pm$ 0.25
 3. RATING: .4VA @ 20 VAC / VDC UL, CUL APPROVED
 ▲ 4. OPERATING FORCE: 60 $\pm$ 25 GRAMS
 5. OPERATING TEMP: -25°C TO 85°C
 6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
 7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
 8. INSULATION RESISTANCE: 100 M Ω MIN. @ 500VDC
 9. DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
 10. CONTACT RESISTANCE: 100 m Ω MAX.
 11. ▲ DENOTES CRITICAL PARAMETER.

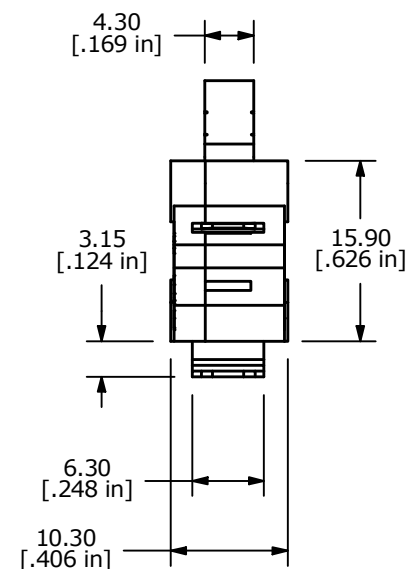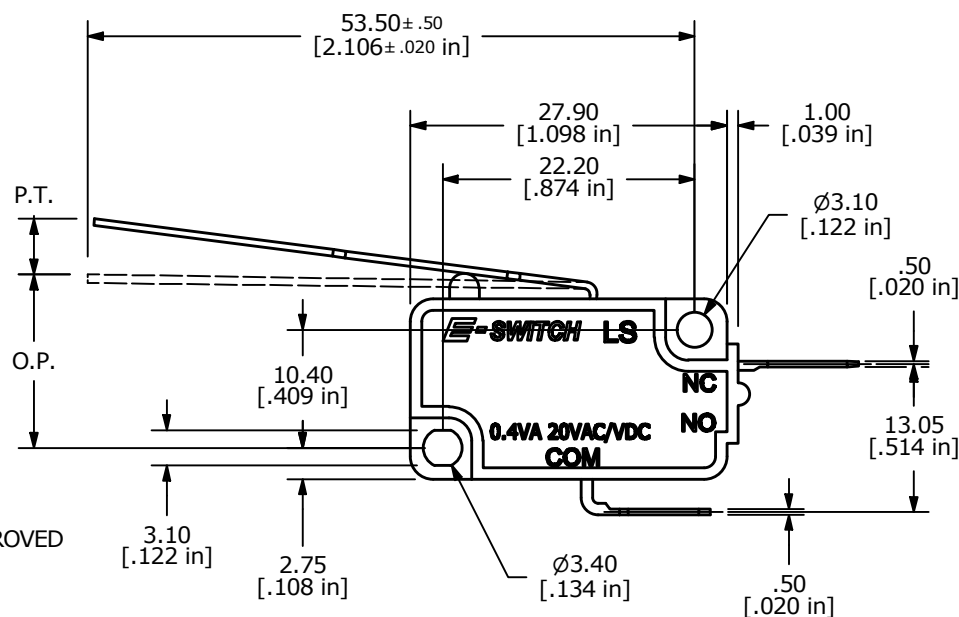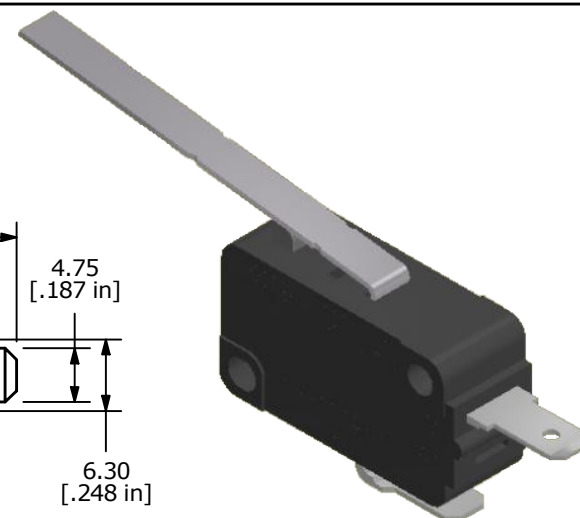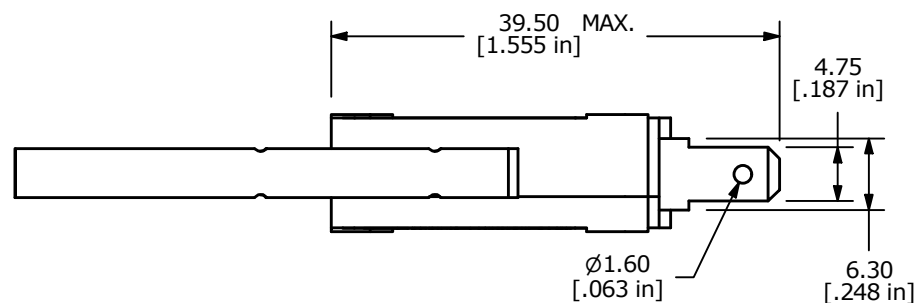

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
B	ECO-100840	REMOVE VDE RATING AND LOGO	04/21/23	JS						000021078
					TITLE LS085R110F060C1B					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:2	DATE 9/2/2011	DR BMA	DWG Q950094	REV B	