


MOUNTING

O.P. (MM)	P.T. (MM)
20.05±1.5	4.7 MAX.





O.P. = OPERATING POINT
P.T. = PRE-TRAVEL



CIRCUIT: SPDT

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
- RATING: 25A @125/250VAC UL, CUL APPROVED
- OPERATING FORCE: 180±60gf
- OPERATING TEMP: -25°C TO 85°C
- ELECTRICAL LIFE: 10,000 CYCLES MIN.
- MECHANICAL LIFE: 1,000,000 CYCLES TYP.
- INSULATION RESISTANCE: 100 MEGA-OHMS MIN.
- DIELECTRIC STRENGTH: 1500VAC 1 MINUTE (INITIAL VALUE)
- CONTACT RESISTANCE: 100 MILLI -OHMS MAX.
- ▲ DENOTES CRITICAL PARAMETER.

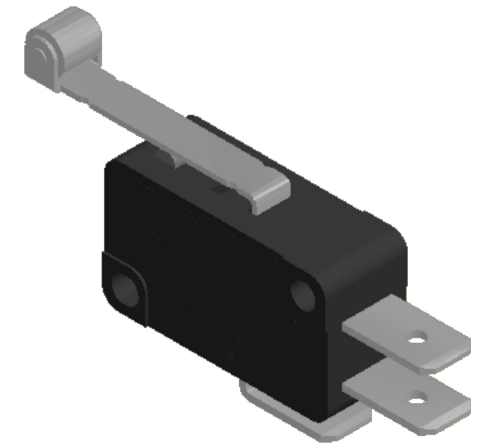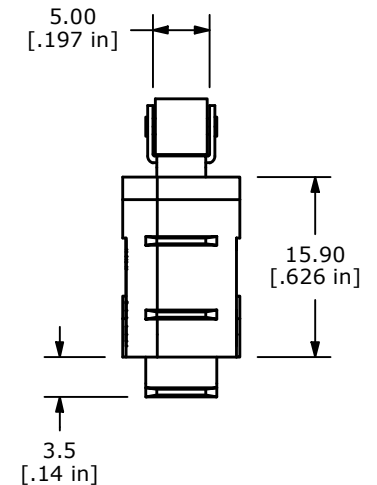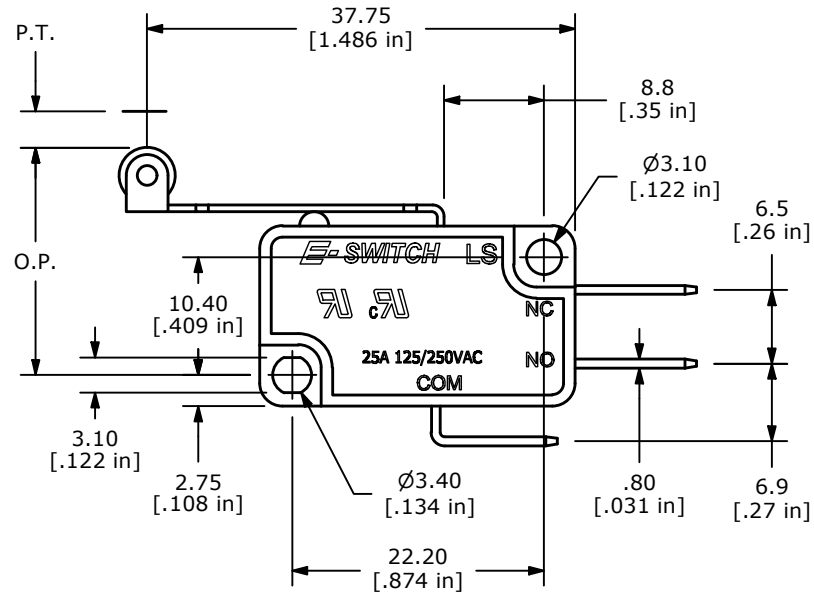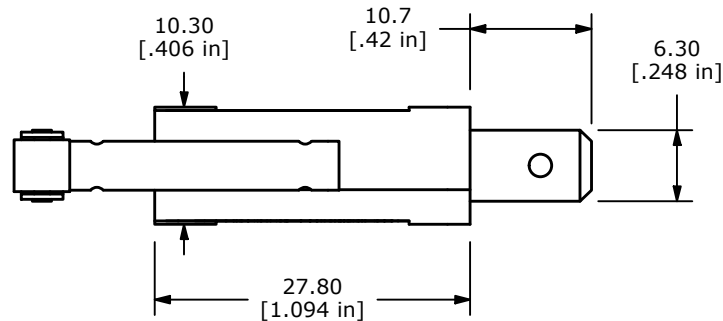

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-103352	RELEASE	06/10/25	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

OBJECT ID
100130233

TITLE LS2506F180C2A				
SCALE 3:2	DATE 4/30/2025	DR JS	DWG Q952007	REV A