


RECOMMENDED PANEL CUTOUT



CIRCUIT: SPST

	DIM "X" ±1.0 [0.39]
▲ CLOSED GAP	19.0 [0.75 in]
DEPARTURE GAP	22.0 [0.87 in]

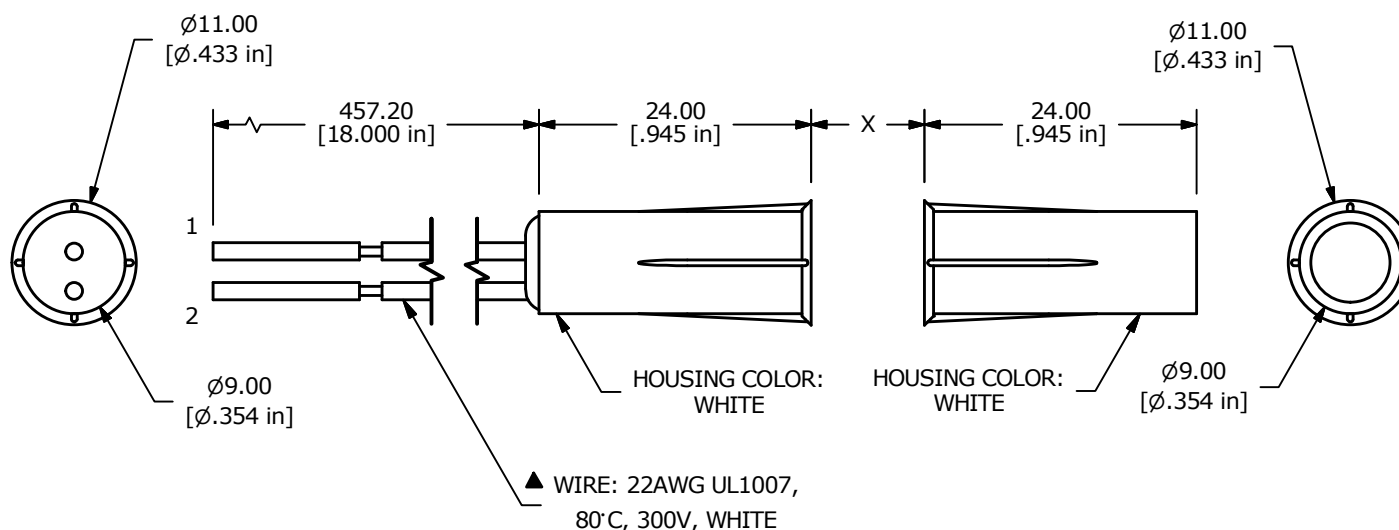

NOTES:

1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE: X.X = ± 0.5
X.XX = ± 0.25
3. CONTACT CONFIGURATION: SPST N.O.
4. CONTACT RESISTANCE: 150 MILLI-OHMS
5. MAXIMUM VOLTAGE: 10V (AC OR DC)
6. MAXIMUM CURRENT: 0.5A
7. ▲ DENOTES CRITICAL PARAMATER



TITLE MR1000AWA

A	23557	NEW RELEASE	9/7/18	MJR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 3:2	DATE 7/21/2015	DR rc	DWG E100000	REV A
--------------	-------------------	----------	----------------	----------