


RECOMMENDED PANEL CUTOUT



CIRCUIT: SPST

	DIM "X" ±1.0 [0.39]
▲ CLOSED GAP	25.0 [1.00 in]
DEPARTURE GAP	28.0 [1.10 in]

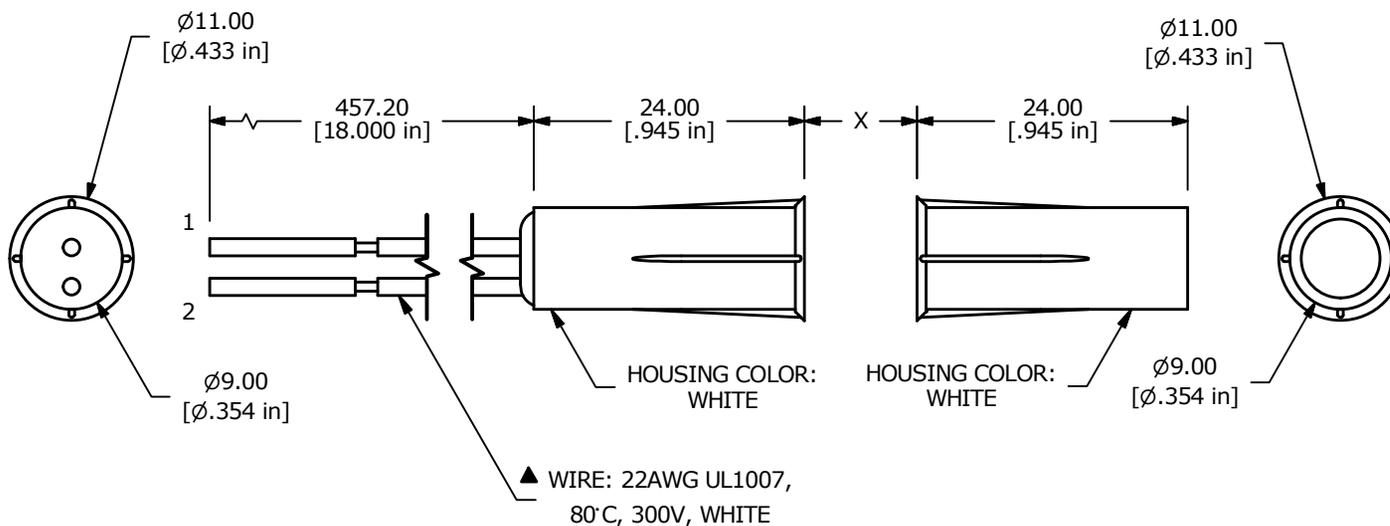

NOTES:

1. ALL DIMENSIONS IN MM[INCH]
2. GENERAL TOLERANCE: X.X = ± 0.5  
X.XX = ± 0.25
3. CONTACT CONFIGURATION: SPST N.O.
4. CONTACT RESISTANCE: 150 MILLI-OHMS
5. MAXIMUM VOLTAGE: 10V (AC OR DC)
6. MAXIMUM CURRENT: 0.5A
7. ▲ DENOTES CRITICAL PARAMATER



TITLE MR1000BWA				
SCALE 3:2	DATE 7/21/2015	DR rc	DWG E100001	REV A