



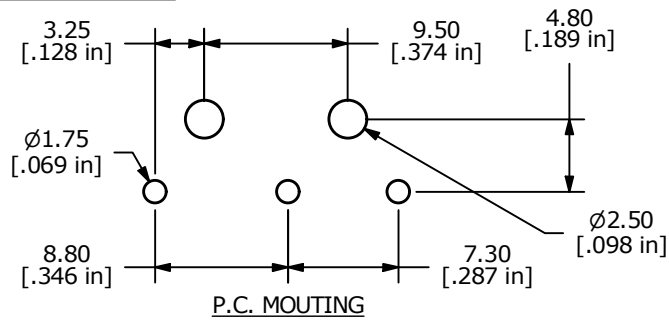




| O.P. (MM) | P.T. (MM) |
|-----------|-----------|
| 9.1 ± 0.8 | 3.6 MAX   |

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL



## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4  
X.XX=± 0.25
3. RATING: 5A @125/250VAC UL, CUL
- ▲ 4. OPERATING FORCE: 45± 20 GRAMS
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MEGA-OHMS
9. DIELECTRIC STRENGTH: 1000VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.

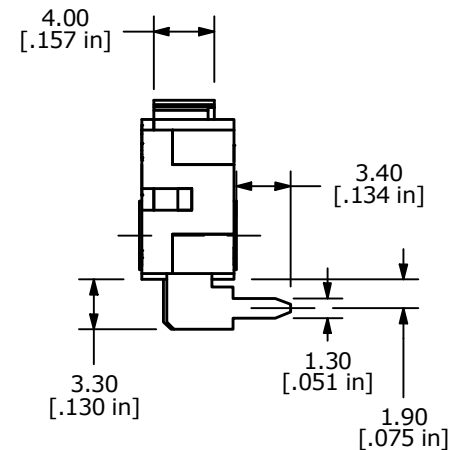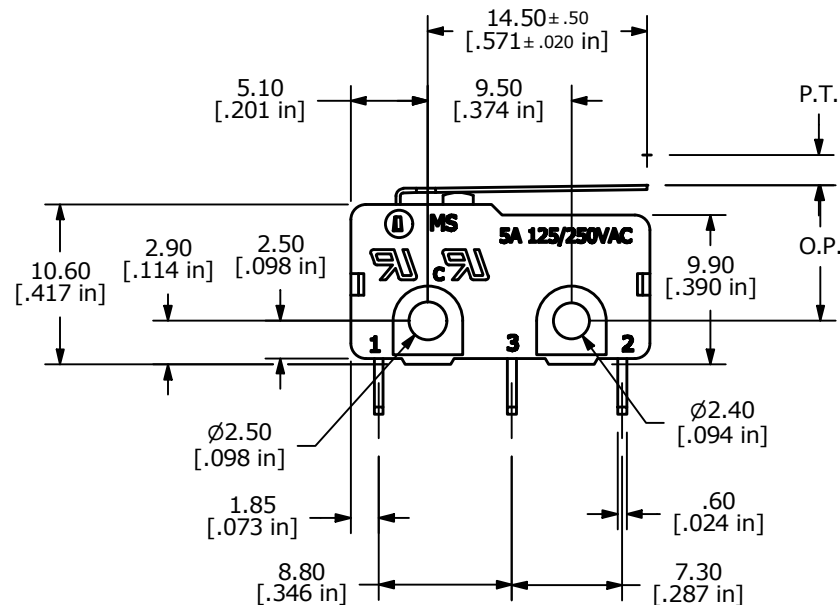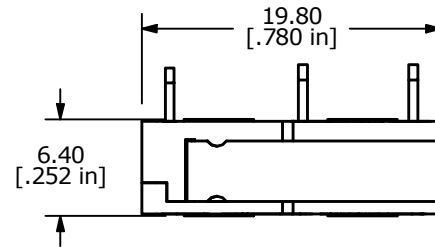

| REV | ECO NO     | DESCRIPTION                | DATE     | BY |
|-----|------------|----------------------------|----------|----|
| I   | ECO-100768 | REMOVE VDE RATING AND LOGO | 03/08/22 | JS |
|     |            |                            |          |    |
|     |            |                            |          |    |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

OBJECT ID  
000021148

TITLE MS0850501F045V1A

SCALE  
2:1

DATE  
3/25/2005

DR  
AR

DWG  
Q970010

REV  
I