






|            |           |
|------------|-----------|
| O.P. (MM)  | P.T. (MM) |
| 14.9 ± 1.0 | 4.0 MAX   |

O.P. = OPERATING POINT  
P.T. = PRE-TRAVEL



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4  
X.XX=± 0.25
3. RATING: 5A @125/250VAC UL, CUL
- ▲4. OPERATING FORCE: 35± 20 GRAMS
5. OPERATING TEMP: -25°C TO 85°C
6. ELECTRICAL LIFE: 50,000 CYCLES MIN.
7. MECHANICAL LIFE: 1,000,000 CYCLES TYP.
8. INSULATION RESISTANCE: 100 MEGA-OHMS @ 500VDC
9. DIELECTRIC STRENGTH: 1000VAC 1 MINUTE (INITIAL VALUE)
10. CONTACT RESISTANCE: 100 MILLI-OHMS MAX.
11. ▲ DENOTES CRITICAL PARAMETER.

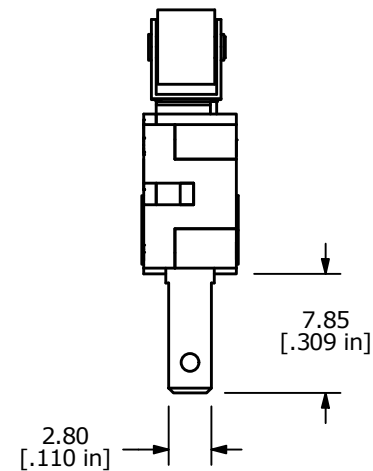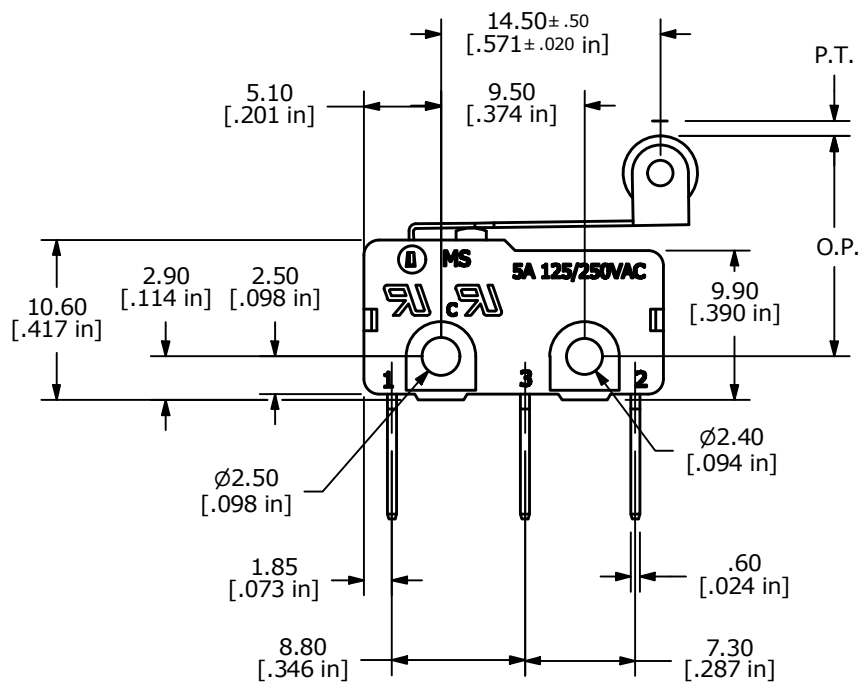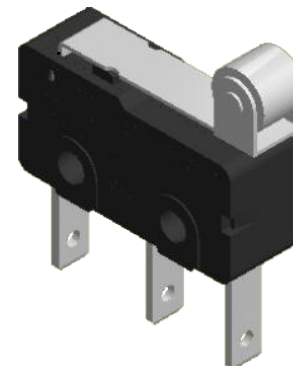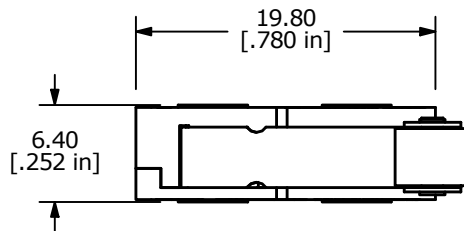

|                                                                                                              |            |                            |          |    |                                                                                                            |                   |          |                |          |           |
|--------------------------------------------------------------------------------------------------------------|------------|----------------------------|----------|----|------------------------------------------------------------------------------------------------------------|-------------------|----------|----------------|----------|-----------|
| REV                                                                                                          | ECO NO     | DESCRIPTION                | DATE     | BY | <div> E-SWITCH®</div> |                   |          |                |          | OBJECT ID |
| B                                                                                                            | ECO-100774 | REMOVE VDE RATING AND LOGO | 03/14/22 | JS |                                                                                                            |                   |          |                |          | 000021193 |
|                                                                                                              |            |                            |          |    | TITLE MS0850505F035C1A                                                                                     |                   |          |                |          |           |
|                                                                                                              |            |                            |          |    |                                                                                                            |                   |          |                |          |           |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |                            |          |    | SCALE<br>2:1                                                                                               | DATE<br>4/10/2006 | DR<br>CT | DWG<br>Q970056 | REV<br>B |           |