
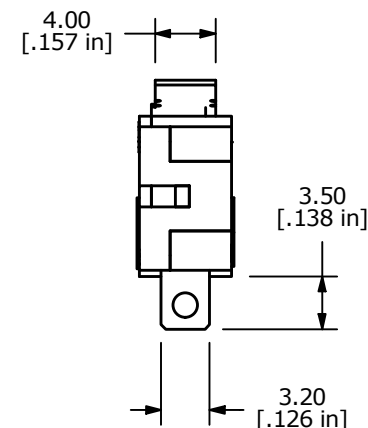
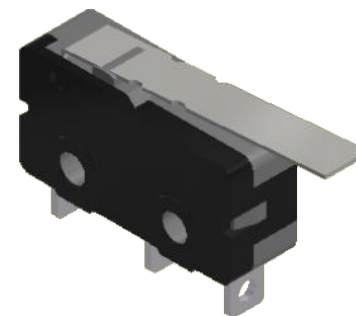


O.P. (MM)	P.T. (MM)
9.5 ±0.3	2.6 MAX

O.P. = OPERATING POINT
P.T. = PRE-TRAVEL

NC 2 3 NO
COM 1
CIRCUIT: SPDT

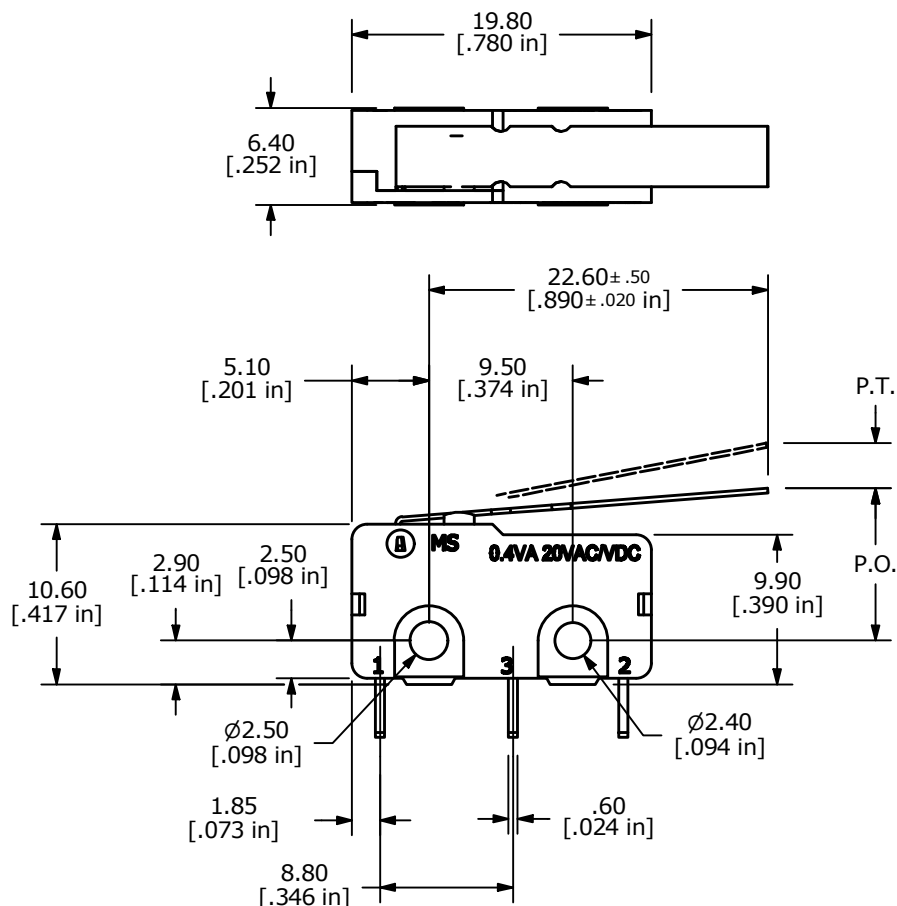

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X=± 0.4
X.XX=± 0.25
- RATING: 0.4VA @20V (AC or DC)
- OPERATING FORCE: 10 ± 5 GRAMS
- OPERATING TEMP: -25°C TO 85°C
- ELECTRICAL LIFE: 50,000 CYCLES MIN.
- MECHANICAL LIFE: 1,000,000 CYCLES TYP.
- INSULATION RESISTANCE: 100 Mega-OHMS
- DIELECTRIC STRENGTH: 1000VAC 1 MINUTE (INITIAL VALUE)
- CONTACT RESISTANCE: 100 Milli-OHMS MAX.
- CONTACTS: 10 MICRO INCHES MINIMUM GOLD PLATING (PN: Q990001)
- ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-100788	REMOVE VDE RATING AND LOGO	03/21/22	JS	MS085R103F010S1A				000021249
					SCALE	DATE	DR	DWG	REV
					2:1	8/23/2010	BLR	Q970113	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED