

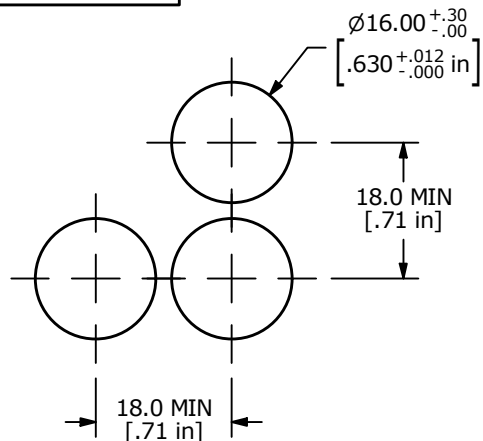

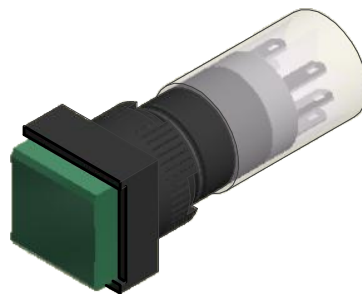




PANEL MOUNTING

SPDT
CONTACT CONFIGURATION

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F051601	P16 PLASTIC TERMINAL PROTECTOR
2	1	F050422	50-004-24 24VDC GREEN LED
3	1	F040011	P16EES11 (BEZEL)
4	1	F050302	50-003-02 CONCAVE GREEN LENS

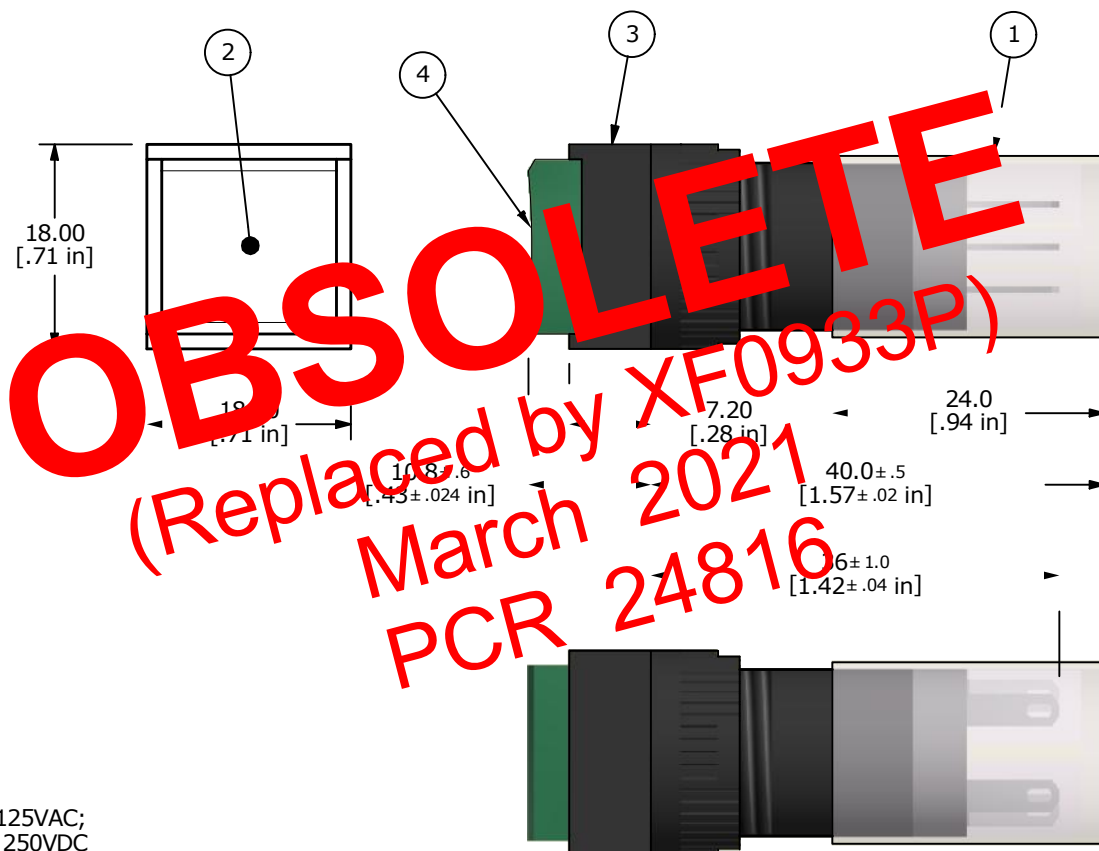

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATING: 5A@ 250VAC; 8A 125VAC;
6A@ 24VDC; 0.2A 250VDC
5. ELECTRICAL LIFE: 50,000 OPERATIONS
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 55°C
- ▲ 8. LAMP VOLTAGE: 24VDC GREEN LED
9. ▲ DENOTES CRITICAL PARAMETER.



A	24332	RELEASED FOR PRODUCTION	6/3/20	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE P16EES11KGRNGRN

SCALE 2:1	DATE 6/3/2020	DR MW	DWG XP0930P	REV A
--------------	------------------	----------	----------------	----------