

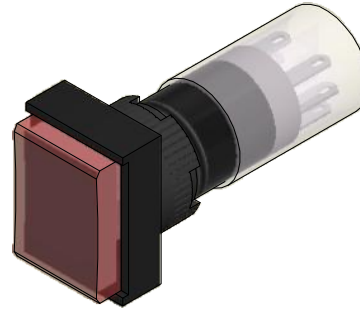
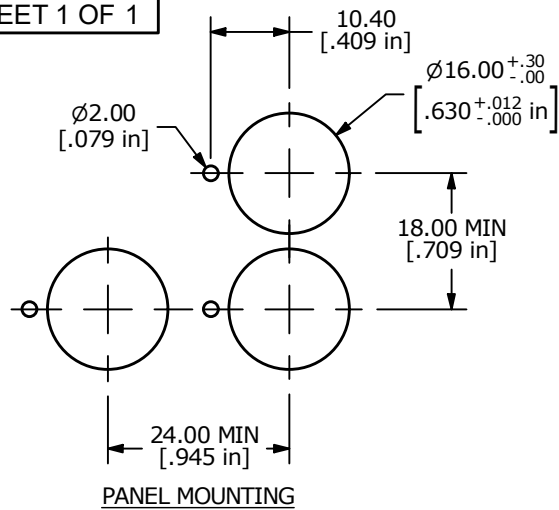
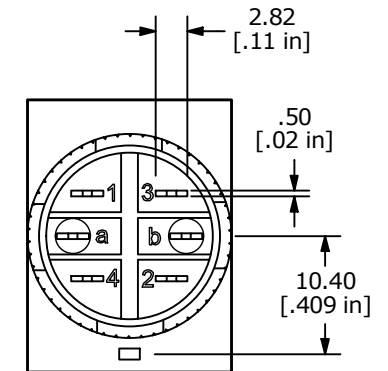


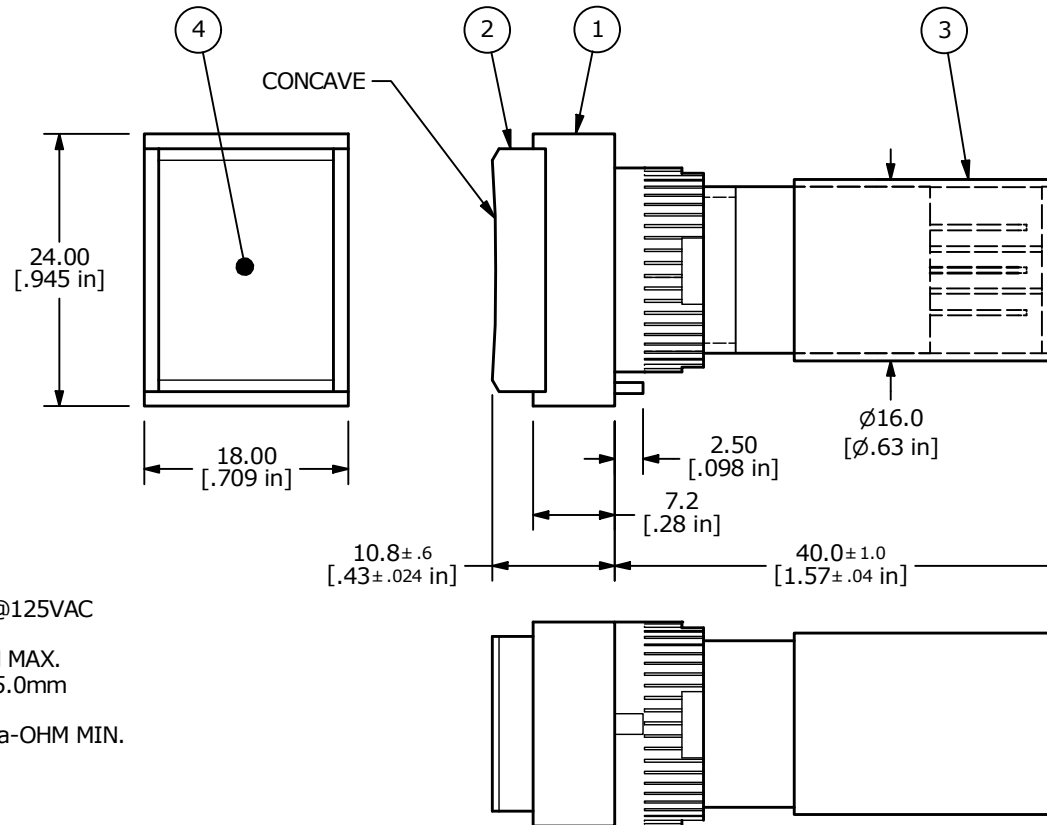

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040013	P16EET11 (LATCHING)
2	1	F050204	50-002-04 RECTANGULAR CONCAVE RED LENS
3	1	F051601	P16 TERMINAL PROTECTOR
4	1	F050420	50-004-20 12VDC LED - RED



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. ELECTRICAL LIFE: 50,000 CYCLES
5. CONTACT RATING: 5A @250VAC, 8A @125VAC
6A @24VDC
6. CONTACT RESISTANCE: 100 Milli-OHM MAX.
7. MOUNTING PANEL THICKNESS: 0.5 - 5.0mm
8. SEAL RATING: IP40
9. INSULATION RESISTANCE: 1,000 Mega-OHM MIN.
10. OPERATING TEMP.: -25°C to 55°C
11. TRAVEL: 3.0mm FULL TRAVEL
- ▲ 12. LAMP VOLTAGE: 12VDC LED, RED
13. ▲ DENOTES CRITICAL PARAMETER.

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-101680	Release	02/24/23	MW	TITLE P16EET11JREDRED				100123659
					SCALE	DATE	DR	DWG	REV
					3:2	2/20/2023	MW	XF0936P	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED