



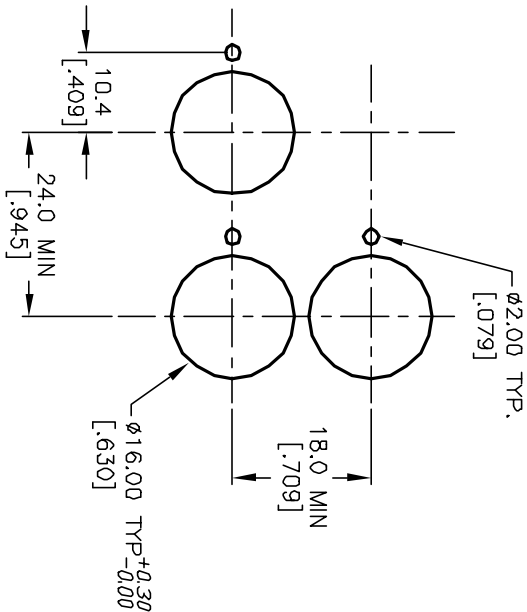

RECOMMEND PANEL MOUNTING



1 0 1 0 2
3 0 0 4
α-Ⓛ-b (+)

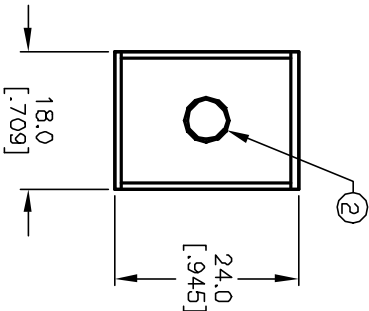

SPST
CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.XX=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 5A@250V AC;
8A@125V AC
5. MECHANICAL LIFETIME: >2 MILLION OPERATIONS
6. TRAVEL: 3.0MM (TOTAL)
7. CONTACT MATERIAL: COPPER ALLOY W/SILVER PLATING
8. LAMP VOLTAGE: 24V DC

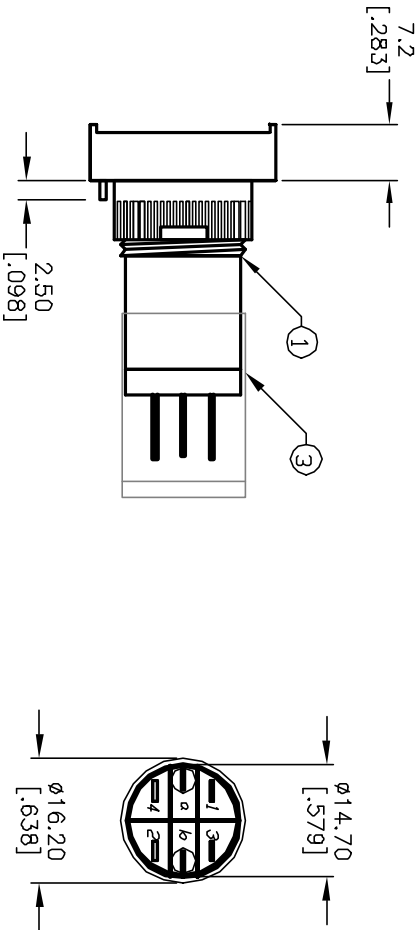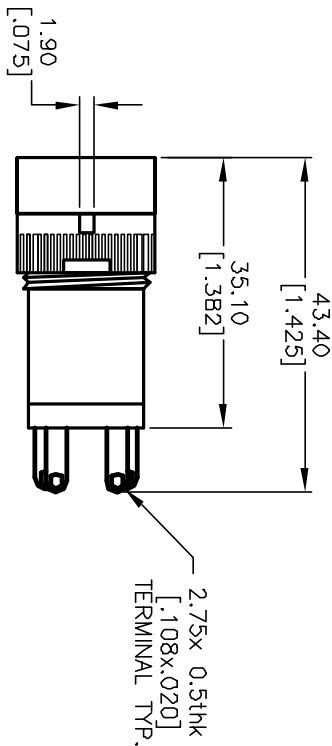

PARTS LIST

ITEM	QTY.	PART NO.	PART DESCRIPTION
1	1	F040013	P16 EE T11
2	1	F050424	50-004-24 (YEL L.E.D.)
3	1	F051601	P16 PLASTIC TERMINAL PROTECTOR

E-SWITCH®

TITLE			
P16EET11KYEL			
A	12913	RELEASED FOR PRODUCTION	3/14/03 AR
REV.	ECN No.	DESCRIPTION	DATE CHKD
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED			
SCALE		DATE	DR
1.5:1		3/14/03	AR
		DWG	XF0545P
		REV	A