








▲ Parts List

ITEM	QTY	PART NUMBER	DESCRIPTION
1	1		P16EET12
2	1	F050202	50-002-02 (GREEN TRANSPARENT CONCAVE LENS)
3	1	F051601	P16 TERMINAL PROTECTOR
4	1	F050413	50-004-13 220V AC NEON GREEN

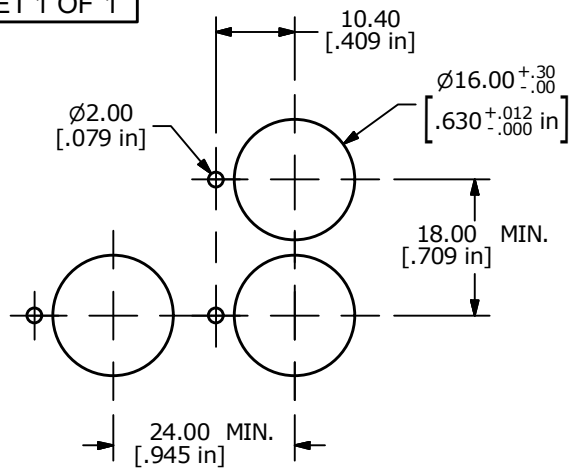

PANEL MOUNTING
MAX. PANEL THICKNESS 5mm

▲ CONCAVE BUTTON
WITH HIGH BEZEL

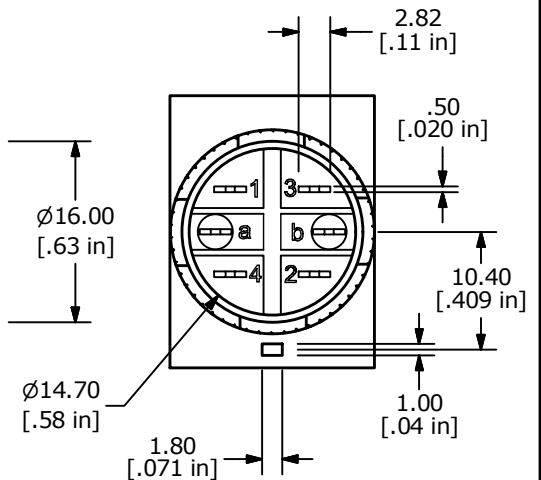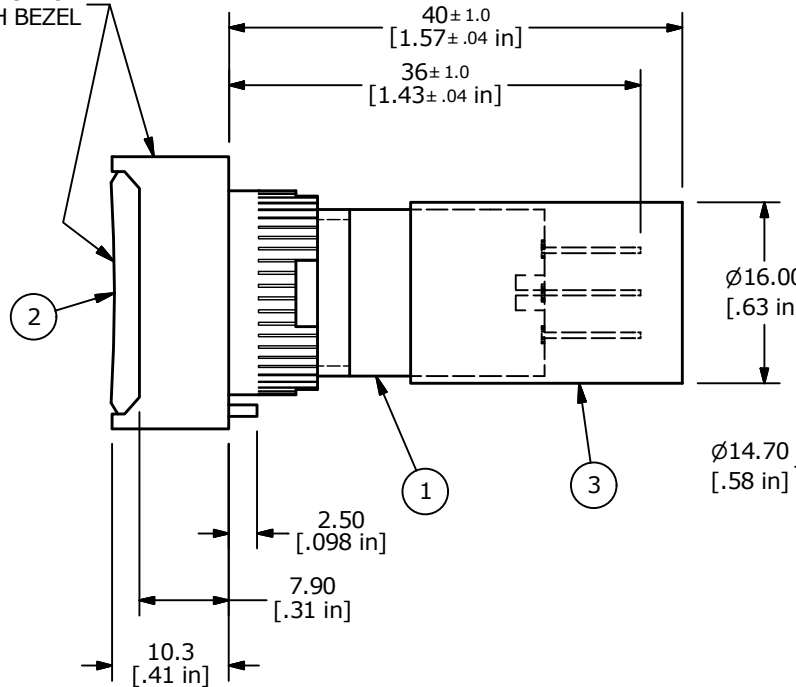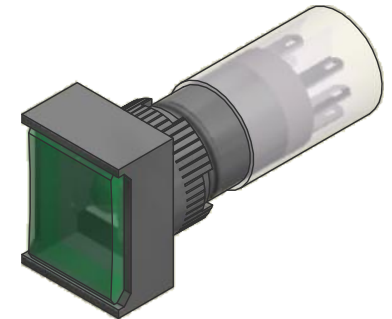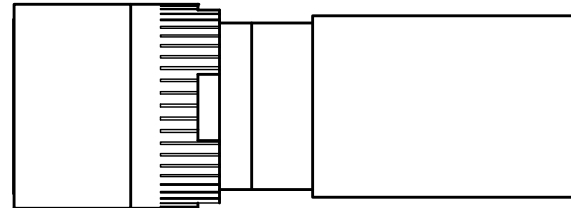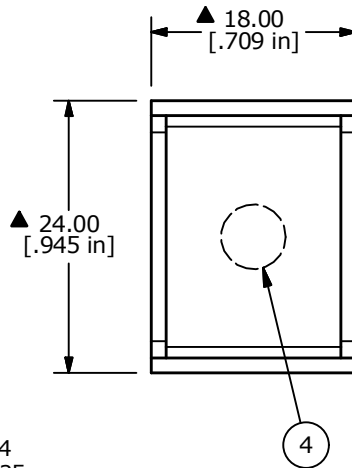

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = 0.4
X.XX = 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. CONTACT RATING: 5A @ 250V AC
8A @ 125V AC
6A @ 24V DC
5. CONTACT RESISTANCE: 100mΩ MAX. @ 2-4 VDC
6. ELECTRICAL LIFE: 50,000 CYCLES
7. TRAVEL: 3.0mm
8. CONTACT MATERIAL: COPPER ALLOY WITH SILVER PLATING
9. OPERATING TEMPERATURE: -25°C TO 55°C WITH LAMP
- ▲ 10. LAMP VOLTAGE: 220V AC NEON GREEN
11. DEGREE OF PROTECTION: IP 40
12. ▲ DENOTES CRITICAL PARAMETER



A	23513	Release for Production	8/8/18	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE P16EET21GGRNGRN

SCALE 3:2	DATE 8/8/2018	DR MW	DWG XF0918P	REV A
--------------	------------------	----------	----------------	----------