
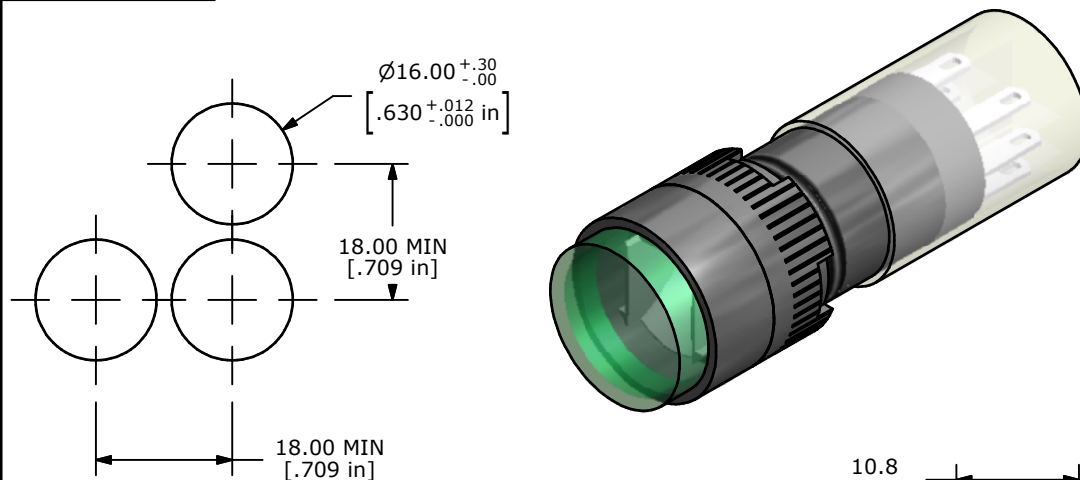






PANEL MOUNTING


SPDT
CONTACT CONFIGURATION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. MECHANICAL LIFE: 2,000,000 OPERATIONS
5. INSULATION RESISTANCE: 1,000 MΩ MIN.
6. OPERATING TEMP.: -25°C to 70°C
- ▲ 7. LAMP VOLTAGE: NO LAMP
8. CONTACT RATING: 5A @ 250VAC
8A @ 125VAC
6A @ 24VDC
9. ▲ DENOTES CRITICAL PARAMETER.
10. 2002/05/EC (ROHS) COMPLIANT.
11. PANEL THICKNESS: 0.5-5.0mm
12. FULL TRAVEL: 3.0mm
13. SEAL RATING: IP40

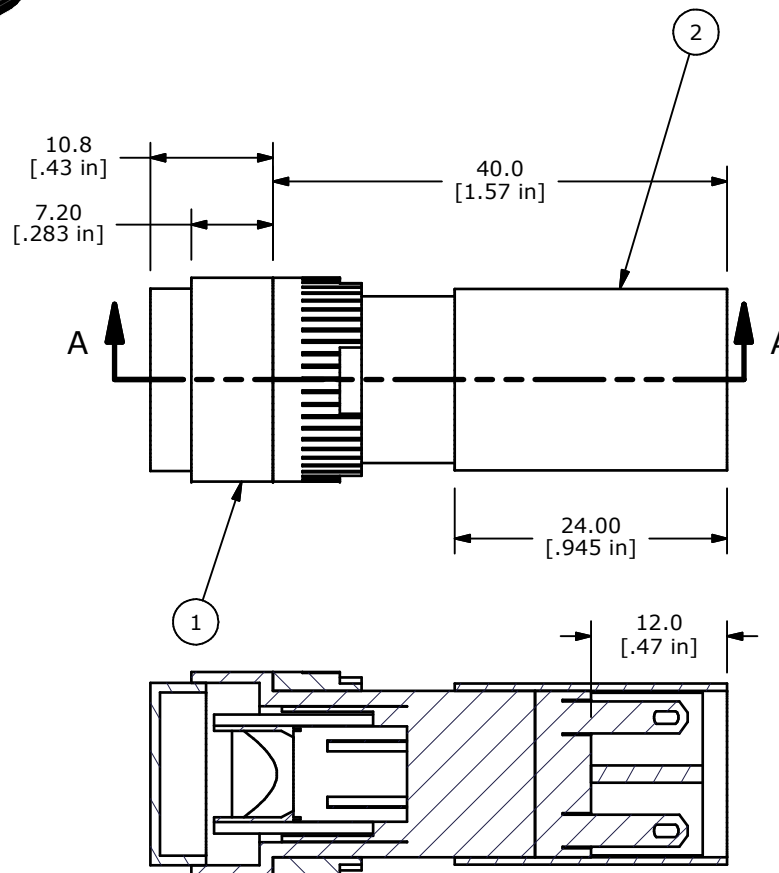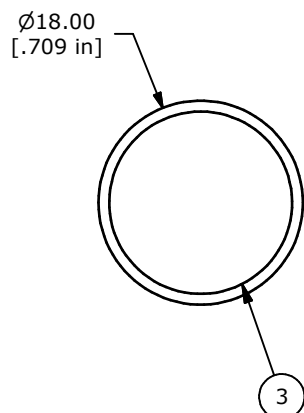

SECTION A-A



PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040014	P16OAR11
2	1	F051601	P16 PLASTIC TERMINAL PROTECTOR
3	1	F050112	ROUND FLAT TRANSPARENT GREEN LENS



A	21364	RELEASED FOR PRODUCTION	1/27/14	EBP
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE P16OAR110GRN

SCALE	DATE 1/27/2014	DR EBP	DWG XF0890P	REV A
-------	-------------------	-----------	----------------	----------