



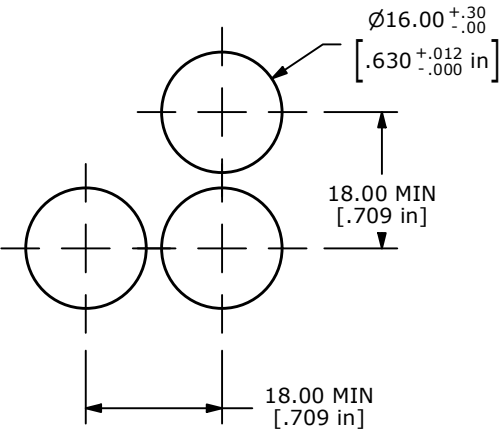

PANEL MOUNTING







SPDT

▲ CONTACT CONFIGURATION
MOMENTARY

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. MECHANICAL LIFE: 100,000 OPERATIONS
5. INSULATION RESISTANCE: 1,000 MΩ MIN.
6. OPERATING TEMP.: -25°C to 55°C
- ▲ 7. LAMP VOLTAGE: NO LAMP
8. CONTACT RATING: 5A @ 250VAC; 8A 125VAC
6A @ 24VDC; 0.2A 250VDC
9. ▲ DENOTES CRITICAL PARAMETER.
10. PANEL THICKNESS: 0.5-5.0mm
11. FULL TRAVEL: 3.0mm
12. SEAL RATING: IP40

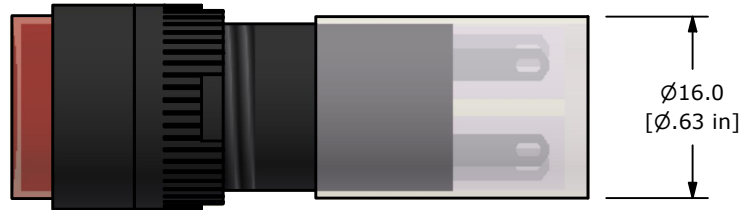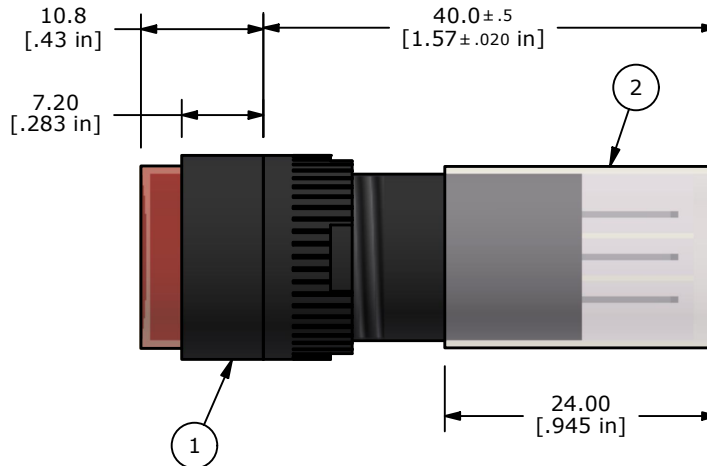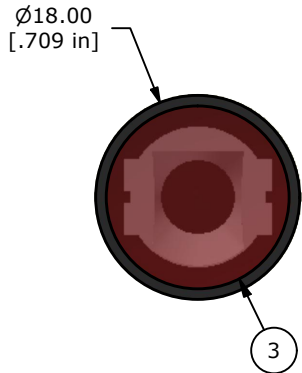

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040014	P16OAR11
2	1	F051601	P16 PLASTIC TERMINAL PROTECTOR
3	1	F050104	ROUND CONCAVE TRANSPARENT RED LENS

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102077	PRINT UPDATE	08/02/23	JS					000027475
					TITLE P16OAR110RED				
					SCALE 3:2	DATE 12/22/2003	DR AR	DWG XF0129P	REV B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED