



ITEM	QTY..	DWG. NO.	PART NO.
1	1	F040014	P16 OA R11
2	1	F050417	50-004-17 (RED LED)
3	1	F051212	50-012-12 (RED LENS TRANSPARENT)
4	-	SUPPLIED	P16 PLASTIC TERMINAL PROTECTOR

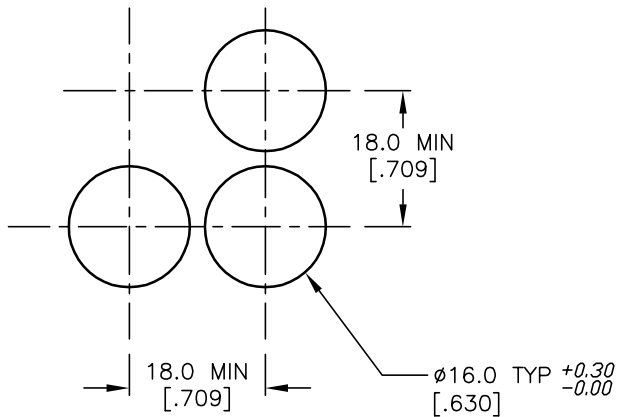



RECOMMENDED PANEL MOUNTING

1 0 1 2
3 0 0 4
a-(L)-b (+)

SPST
CONTACT CONFIGURATION



RED MUSHROOM HEAD

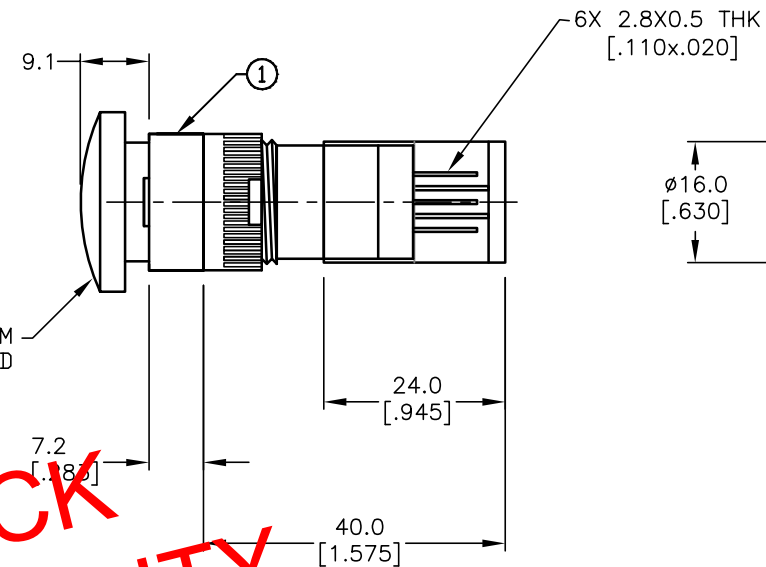

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATINGS: 5A @250V AC;
8A @125V AC
4. CONTACT MATERIAL:
COPPER ALLOY W/Silver Plating
- ▲ 5. LAMP VOLTAGE: 6V DC
6. ▲ DENOTES CRITICAL PARAMETER.

**CHECK
AVAILABILITY
ECO-101497**

E-SWITCH®

TITLE

P16OAR1HREDRED

SCALE

1.5:1

DATE

10/27/03

DR

AR

DWG

XF0572P

REV

A

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	13557	RELEASED FOR PRODUCTION	10/27/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT
IS PROPRIETARY TO E-SWITCH AND IS
NOT TO BE COPIED OR TRANSFERRED