

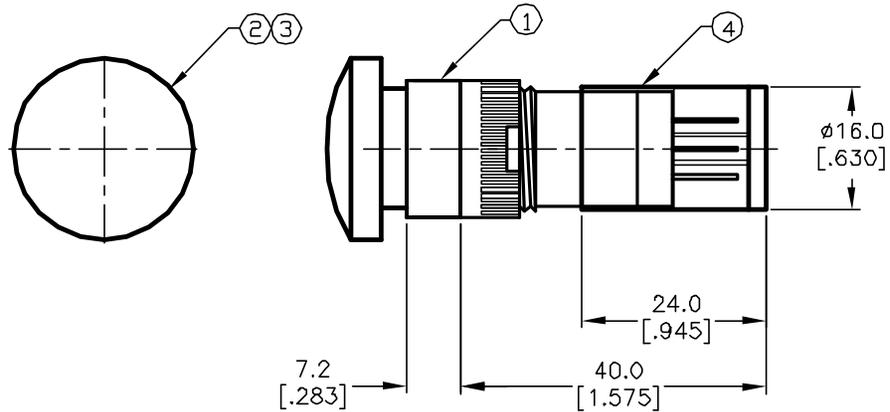


RECOMMENDED PANEL MOUNTING

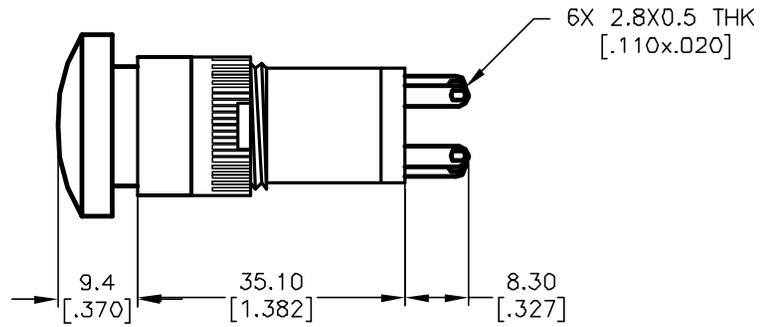

1 o 2
3 o 4
a-(L)-b(+)

CONTACT CONFIGURATION

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 5A @250V AC;
8A @125V AC
5. MECHANICAL LIFETIME: >2 MILLION OPERATIONS
6. TRAVEL: 3.0MM
7. CONTACT MATERIAL: COPPER ALLOY W/SILVER PLATING
8. LAMP VOLTAGE: 12V DC

CHECK
AVAILABILITY
ECO-101497

PARTS LIST

ITEM	QTY.	PART NO.	PART DESCRIPTION
1	1	F040014	P16 OA R11
2	1	F050420	50-004-20(RE D LED)
3	1	F051212	50-012-12 (RED LENS TRANSPARENT)
4	1	F051601	P16 PLASTIC TERMINAL PROTECTOR

E-SWITCH®

TITLE P16 OA R 1 J RED RED (MOMENTARY)
TRANSPARENT MUSHROOM HEAD

A	12483	RELEASED FOR PRODUCTION	10/14/02	CB
REV.	ECN No.	DESCRIPTION	DATE	CHKD

SCALE	DATE	DR	DWG	REV
1.5:1	10/04/02	CB	XF0520P	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED