
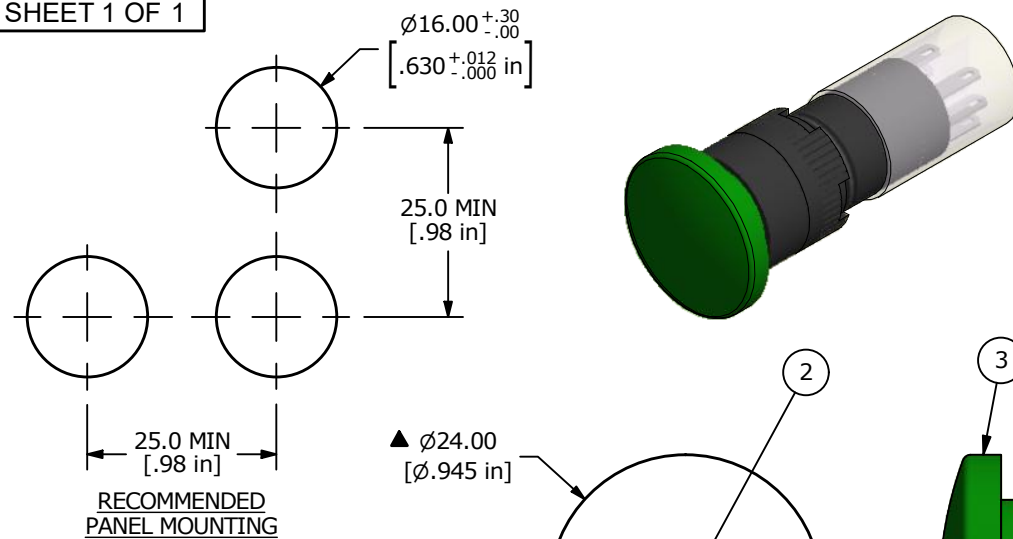



SPDT
CONTACT CONFIGURATION
OFF-(ON)
MOMENTARY

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATING: 5A@ 250VAC; 8A 125VAC;
6A@ 24VDC; 0.2A 250VDC
5. ELECTRICAL LIFE: 50,000 OPERATIONS
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 55°C
- ▲ 8. LAMP VOLTAGE: 24V DC GREEN LED
9. ▲ DENOTES CRITICAL PARAMETER.

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F040014	P16OAR11 HOUSING (MOMENTARY)
2	1	F050422	24V DC GREEN LED
3	1	F051211	GREEN TRANSPARENT BUTTON (MUSHROOM)
4	1	F051601	P16 PLASTIC TERMINAL PROTECTOR

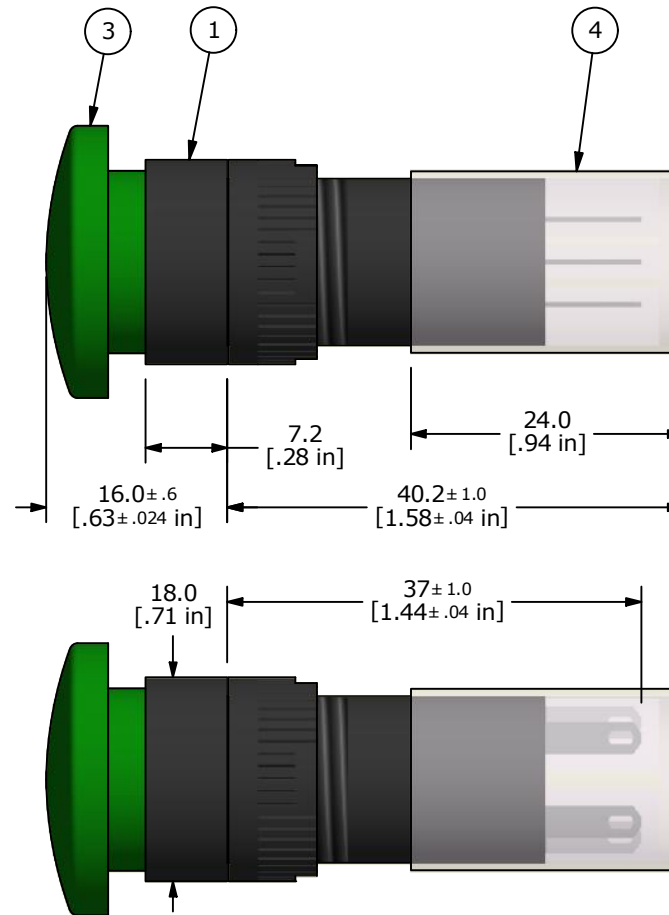

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-101452	update print	12/16/22	MW	TITLE P16OAR1KGRNGRN				000027476
					SCALE	DATE	DR	DWG	REV
					2:1	9/18/2003	AR	XF0130P	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED