




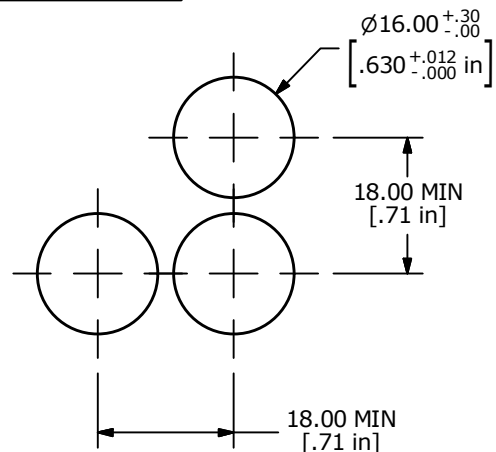

PANEL MOUNTING



SPDT
CONTACT CONFIGURATION
(MOMENTARY)

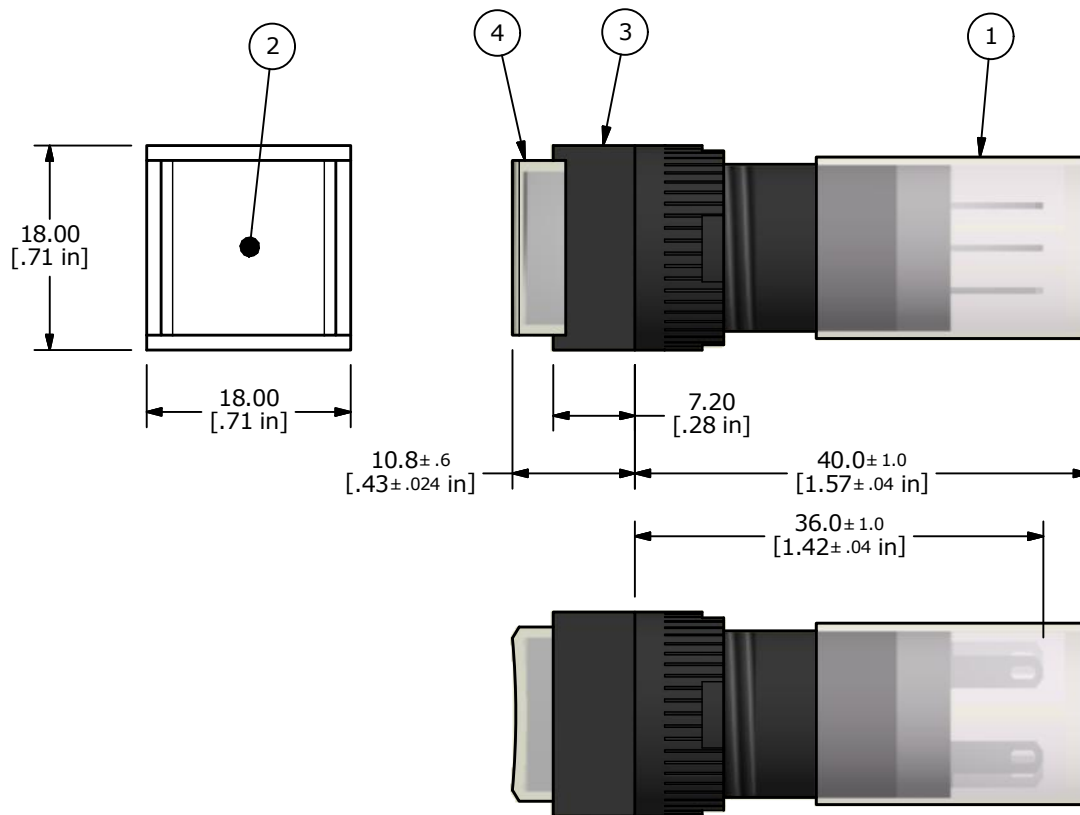

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATING: 5A@ 250VAC
6A@ 24VDC
5. ELECTRICAL LIFE: 50,000 OPERATIONS
6. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
7. OPERATING TEMP.: -25°C to 55°C
- ▲ 8. LAMP VOLTAGE: 28V AC/DC 40mA INCANDESCENT
9. ▲ DENOTES CRITICAL PARAMETER.

PARTS LIST			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	F051601	P16 PLASTIC TERMINAL PROTECTOR
2	1	F050405	50-004-05 28V AC/DC 40mA INCANDESCENT
3	1	F040010	P16OAS11 HOUSING (MOMENTARY)
4	1	F050305	50-003-05 CONCAVE WHITE LENS



B	24137	redrawn and updated	12/23/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE P16OAS11CWHT

SCALE 2:1	DATE 12/19/2019	DR MW	DWG XF0411P	REV B
--------------	--------------------	----------	----------------	----------