
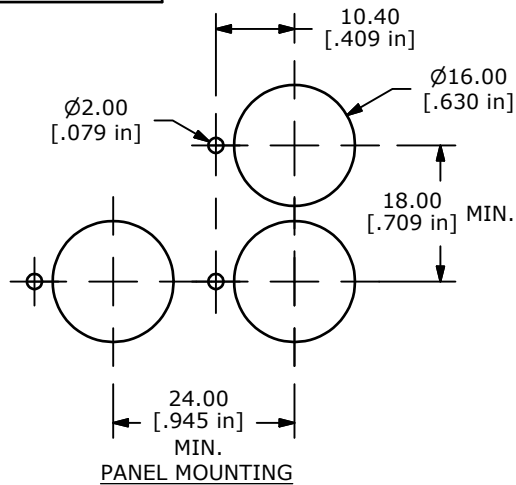
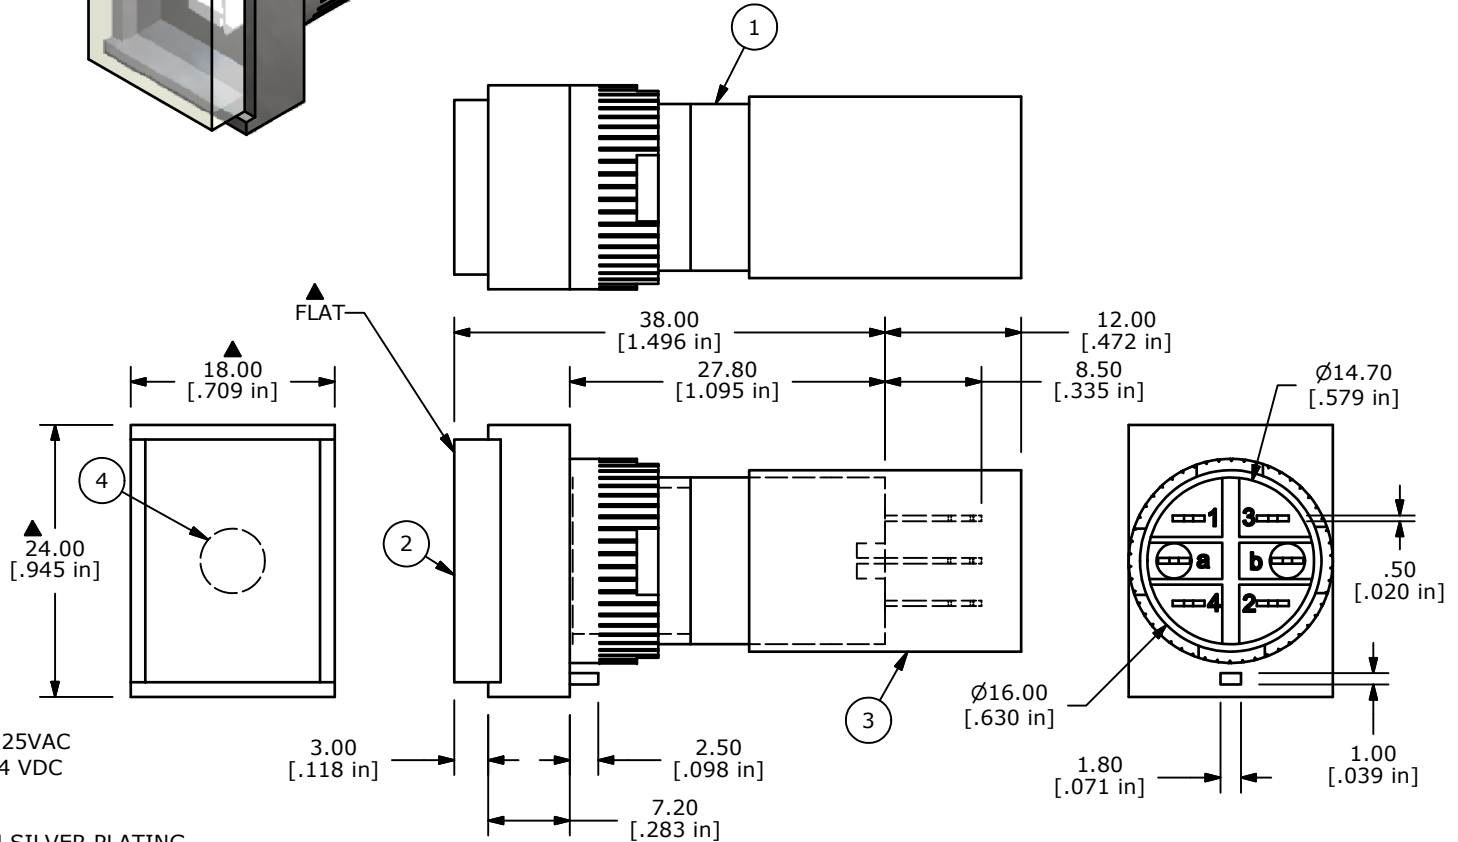


## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = 0.4  
X.XX = 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. CONTACT RATING: 5A @ 250VAC / 8A @ 125VAC
5. CONTACT RESISTANCE: 100mΩ MAX. @ 2-4 VDC
6. ELECTRICAL LIFE: 50,000 CYCLES
- ▲ 7. TRAVEL: 3.0MM
8. CONTACT MATERIAL: COPPER ALLOY WITH SILVER PLATING
9. LAMP VOLTAGE: 6 VDC
10. ▲ CRITICAL PARAMETER
11. 2002/95/EC (ROHS) COMPLIANT

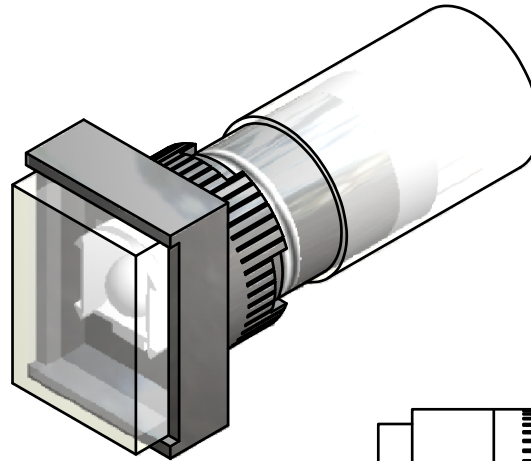

## ▲ Parts List

| ITEM | QTY | PART NUMBER | DESCRIPTION                        |
|------|-----|-------------|------------------------------------|
| 1    | 1   | F040012     | P16OAT11                           |
| 2    | 1   | F050215     | 50-002-15 (WHITE LENS TRANSPARENT) |
| 3    | 1   | F051601     | P16 TERMINAL PROTECTOR             |
| 4    | 1   | F050431     | 50-004-31 6V LED (WHITE)           |



TITLE P16OAT11HWHTWHT

|     |        |                        |         |     |
|-----|--------|------------------------|---------|-----|
| A   | 20121  | RELEASE FOR PRODUCTION | 8/30/11 | BGL |
| REV | PCR NO | DESCRIPTION            | DATE    | BY  |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|       |           |     |         |     |
|-------|-----------|-----|---------|-----|
| SCALE | DATE      | DR  | DWG     | REV |
| 1.5:1 | 8/31/2011 | BGL | XF0845P | A   |