


PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.8


RECOMMENDED
PANEL CUT-OUT



▲ OFF-ON
CIRCUIT: SPST


▲ HOUSING COLOR:
BLACK

LENS COLOR:
▲ GREEN

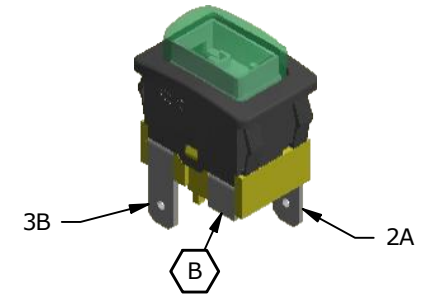

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. ELECTRICAL LIFE: 6,000 [cURus]
4. CONTACT RESISTANCE: 20 mΩ MAX. INITIAL
5. INSULATION RESISTANCE: 100 MΩ AT 500VDC
6. OPERATING TEMPERATURE: -20°C TO +65°C [cURus]
7. CONTACT RATING: 16A, 125VAC-250VAC, [cURus]
8. DIELECTRIC STRENGTH: 1000VAC FOR 1 MINUTE
9. ILLUMINATION VOLTAGE: 125V
10. TERMINALS TO BE SILVER PLATED
11. ▲ DENOTES CRITICAL PARAMETER

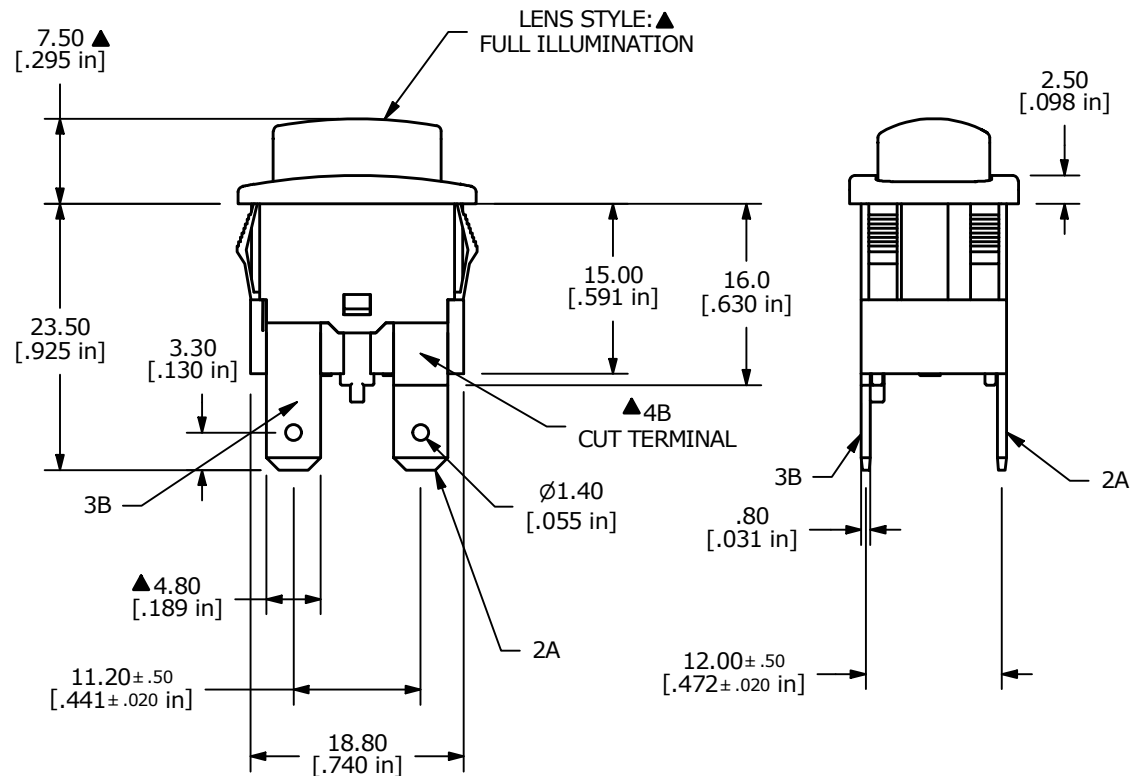

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-100481	REMOVE VDE FROM NOTES	12/13/21	JS	TITLE PA411C1000-136				000000191
					SCALE	DATE	DR	DWG	REV
					3:2	12/18/2012	EBP	14-PA411C1000136	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED