

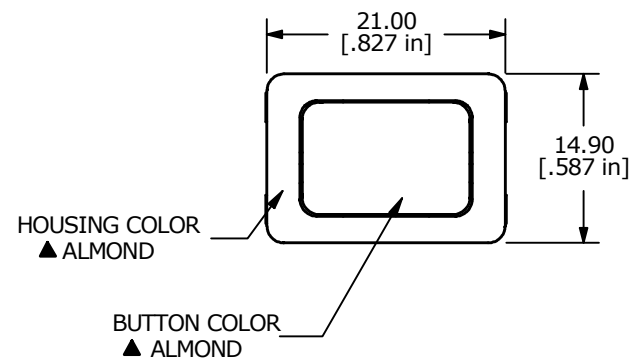



| PANEL THICKNESS | X    |
|-----------------|------|
| 0.50-1.20       | 19.0 |
| 1.20-2.00       | 19.3 |
| 2.00-3.00       | 19.6 |

RECOMMENDED  
PANEL CUT-OUT



## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4  
X.XX=± 0.25
3. ELECTRICAL LIFE: 6,000 cURus
4. CONTACT RESISTANCE: 20 MILLI OHMS
5. INSULATION RESISTANCE: 100 MEGA OHMS AT 50VDC
6. OPERATING TEMPERATURE: -20°C TO +65°C cURus
7. CONTACT RATING: 16A, 125VAC-250VAC, cURus APPROVED
8. DIELECTRIC STRENGTH: 1000V FOR 1 MIN
9. ▲ DENOTES CRITICAL PARAMETER

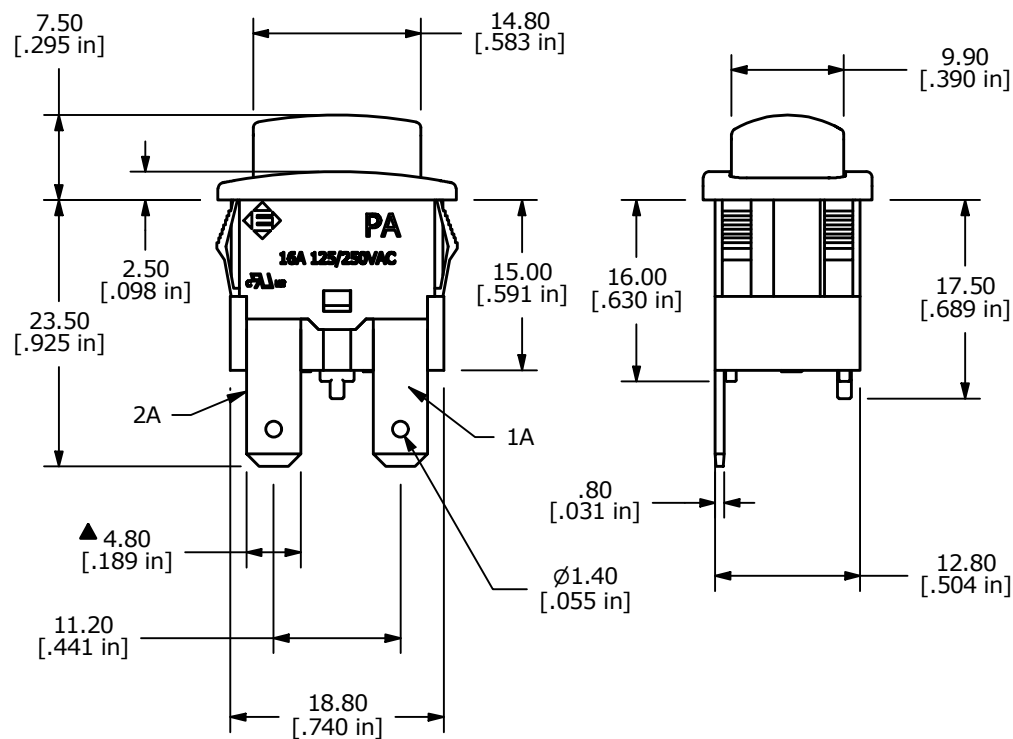

| REV                                                                                                          | ECO NO     | DESCRIPTION           | DATE     | BY | E-SWITCH®        |          |     |               | OBJECT ID |
|--------------------------------------------------------------------------------------------------------------|------------|-----------------------|----------|----|------------------|----------|-----|---------------|-----------|
| D                                                                                                            | ECO-100481 | REMOVE VDE FROM NOTES | 12/13/21 | JS | TITLE PA414C3300 |          |     |               | 000000202 |
|                                                                                                              |            |                       |          |    | SCALE            | DATE     | DR  | DWG           | REV       |
| THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED |            |                       |          |    | 3:2              | 4/9/2010 | BLR | 14-PA414C3300 | D         |