




PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.8

RECOMMENDED
PANEL CUT-OUT





▲ OFF-ON
SPST

SCHEMATIC

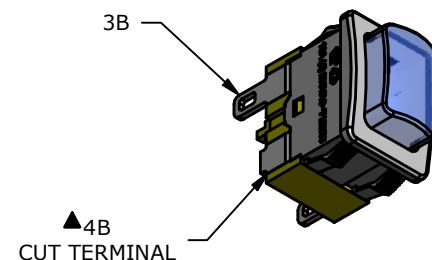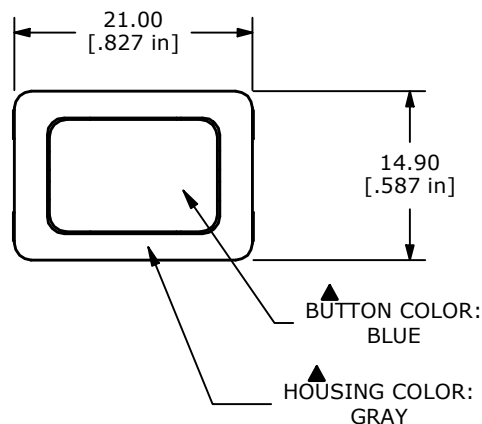

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X ± 0.4
X.XX ± 0.25
3. ELECTRICAL LIFE: 6,000 [cURus]
10,000 [VDE]
4. CONTACT RESISTANCE: 20 m Ω MAX. INITIAL
5. INSULATION RESISTANCE: 100 M Ω AT 500VDC
6. OPERATING TEMPERATURE: -20°C TO +65°C [cURus]
-20°C TO +125°C [VDE]
7. CONTACT RATING: 16A, 125VAC-250VAC, [cURus]
16(4)A, 250VAC, T125/55, [VDE]
8. DIELECTRIC STRENGTH: 1000V FOR 1 MINUTE
- ▲ 9. LAMP VOLTAGE: 12V
10. TERMINALS TO BE SILVER PLATED
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (RoHS) COMPLIANT.

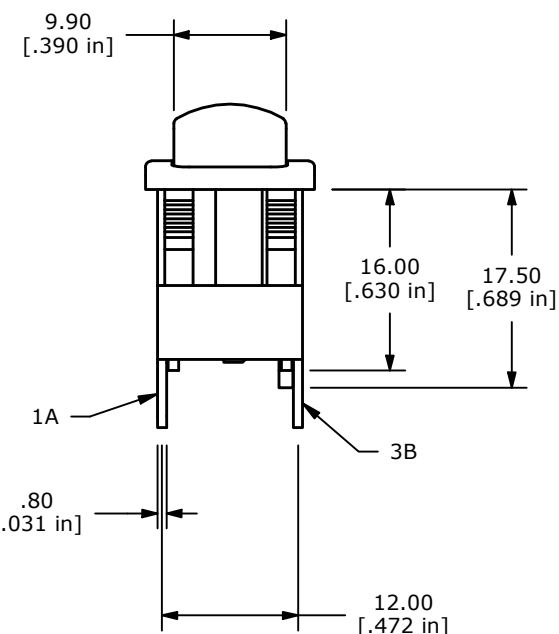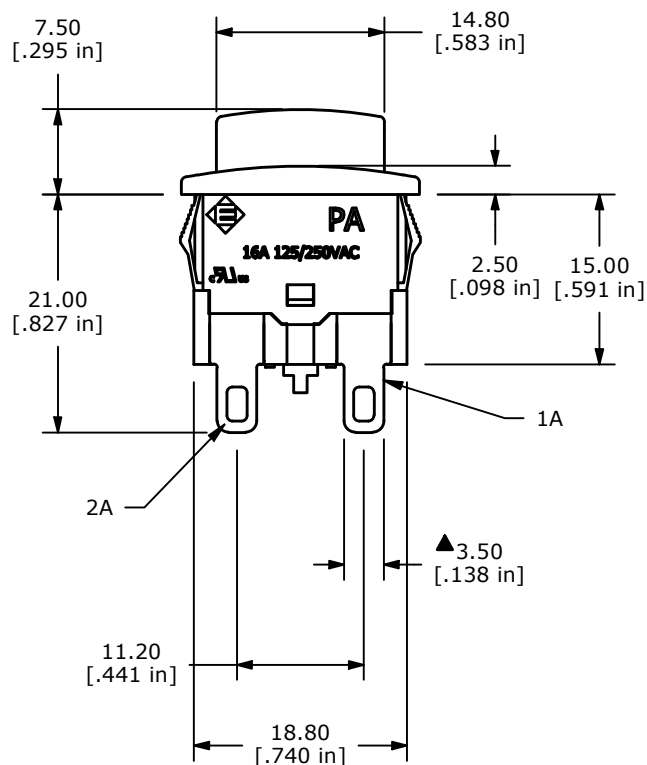

TITLE PA421C4000144

A	21548	Change Housing Locking Tab	8/11/14	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 1.5 : 1	DATE 8/11/2014	DR rc	DWG 14-PA421C4000144	REV A
------------------	-------------------	----------	-------------------------	----------