
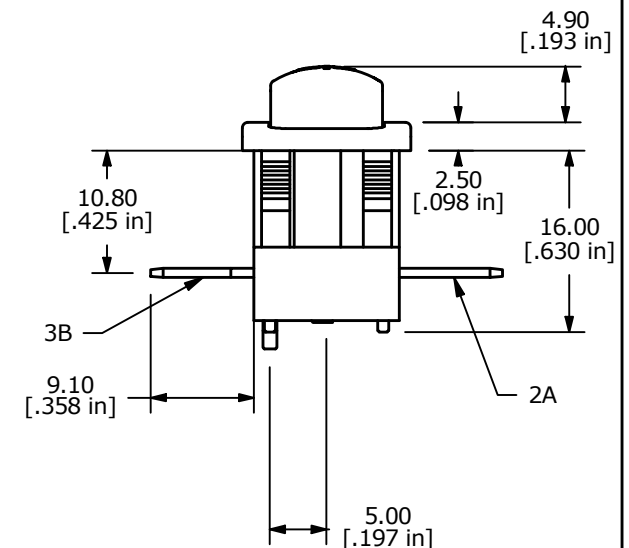
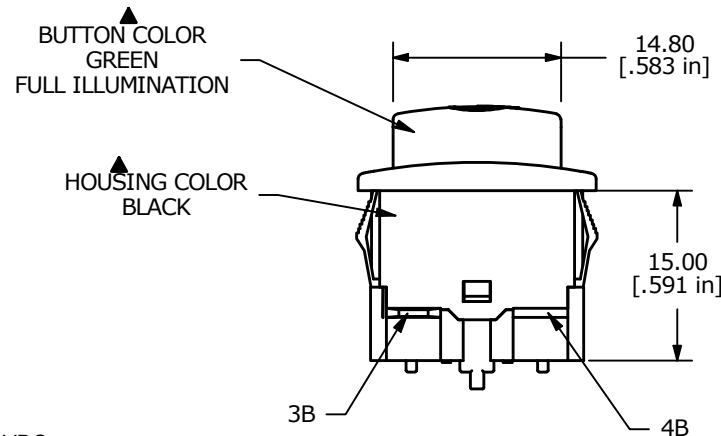
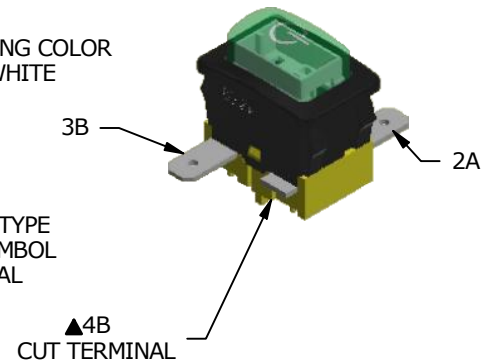
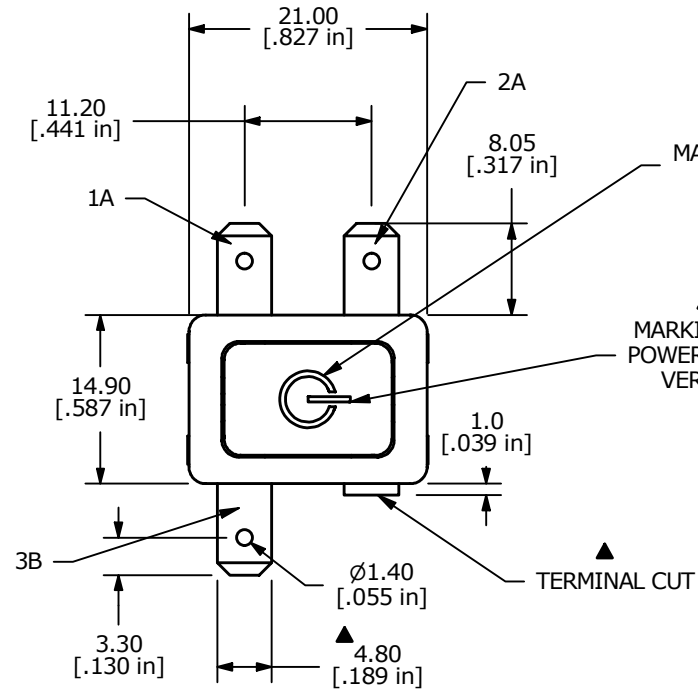


PANEL THICKNESS	X
0.50-1.20	19.0
1.20-2.00	19.3
2.00-3.00	19.6

RECOMMENDED
PANEL CUT-OUT



NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
- ▲ 3. TERMINAL: HORIZONTAL TAB, 4.8mm
- ▲ 4. RATING: 16A 125/250VAC [cURus]
5. ELECTRICAL LIFE: 6000 CYCLES cURus
6. CONTACT RESISTANCE: 20m OHM INITIAL MAX
7. INSULATION RESISTANCE 100M OHM MIN @ 500VDC
8. DIELECTRIC STRENGTH 1,000 VAC FOR 1 MINUTE
9. ▲ DENOTE CRITICAL PARAMETER
- ▲ 10. ILLUMINATION: 12V

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-100485	REMOVE VDE FROM NOTES	12/13/21	JS	TITLE PA451C1021-134				000000217
					SCALE	DATE	DR	DWG	REV
					2:1	5/20/2011	BGL	14-PA451C1021134	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED