


| PANEL THICKNESS | X    |
|-----------------|------|
| 0.75-1.25       | 19.2 |
| 1.25-2.00       | 19.4 |
| 2.00-3.00       | 19.8 |

RECOMMENDED  
PANEL CUT-OUT







▲ OFF - (ON)  
SPST  
( ) Denotes Momentary  
Function

SCHEMATIC

▲ BODY COLOR:  
BLACK

▲ LENS COLOR:  
CLEAR

▲ LENS STYLE:  
FULL ILLUMINATION

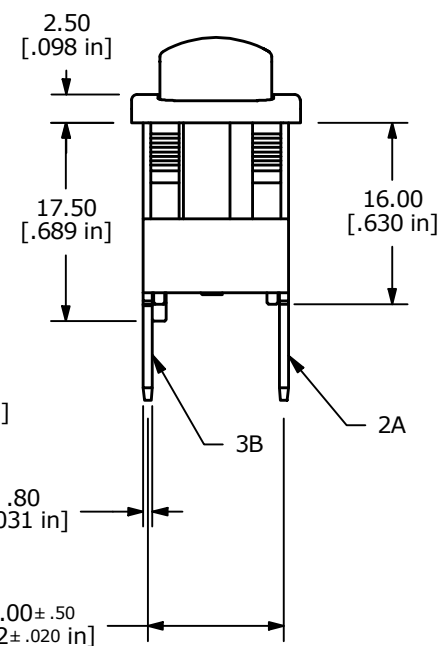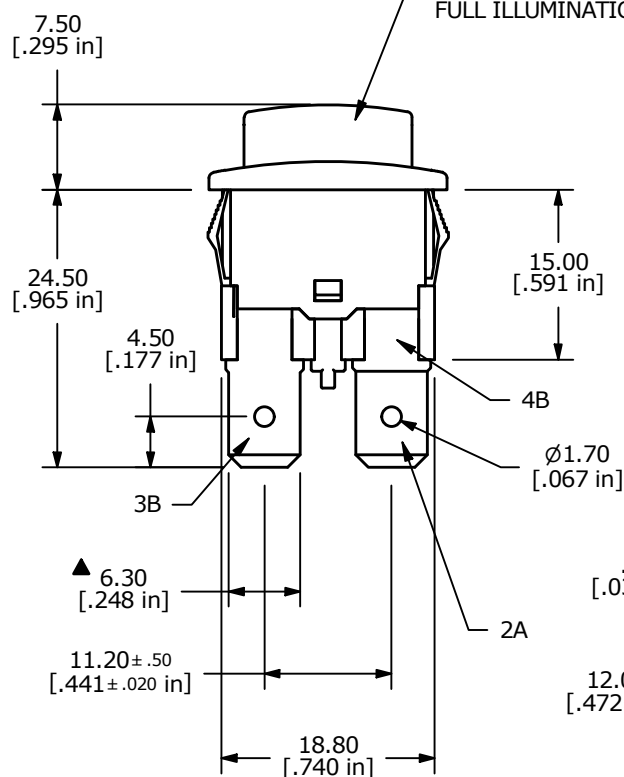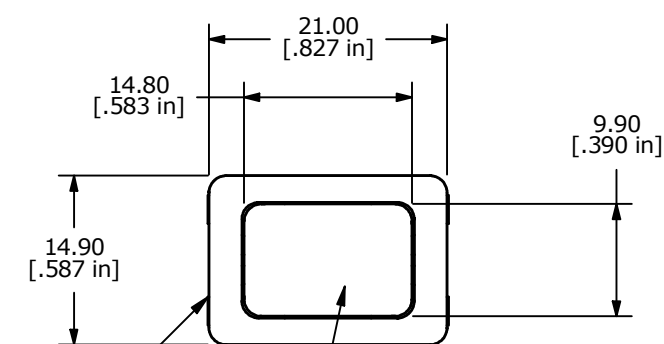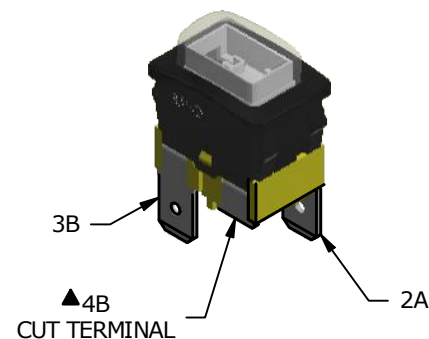

# NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4  
X.XX=± 0.25
3. ELECTRICAL LIFE: 6,000 [cURus]
4. CONTACT RESISTANCE: 20 mΩ MAX. INITIAL
5. INSULATION RESISTANCE: 100 MΩ AT 500VDC
6. OPERATING TEMPERATURE: -20°C TO +65°C [cURus]
7. CONTACT RATING: 16A, 125VAC-250VAC, [cURus]
8. DIELECTRIC STRENGTH: 1000V FOR 1 MINUTE
- ▲ 9. ILLUMINATION VOLTAGE: 250V
10. TERMINALS TO BE SILVER PLATED
11. ▲ DENOTES CRITICAL PARAMETER

| REV | ECO NO     | DESCRIPTION           | DATE     | BY | E-SWITCH®            |          |    |                  | OBJECT ID |
|-----|------------|-----------------------|----------|----|----------------------|----------|----|------------------|-----------|
| D   | ECO-100485 | REMOVE VDE FROM NOTES | 12/13/21 | JS | TITLE PA464C1000-107 |          |    |                  | 000000219 |
|     |            |                       |          |    | SCALE                | DATE     | DR | DWG              | REV       |
|     |            |                       |          |    | 2:1                  | 8/8/2014 | RC | 14-PA464C1000107 | D         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED