
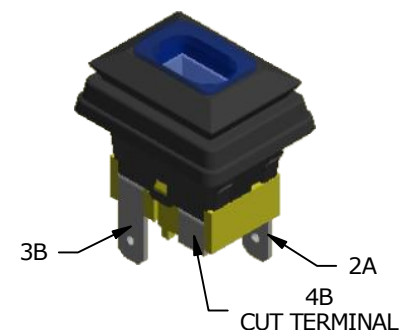
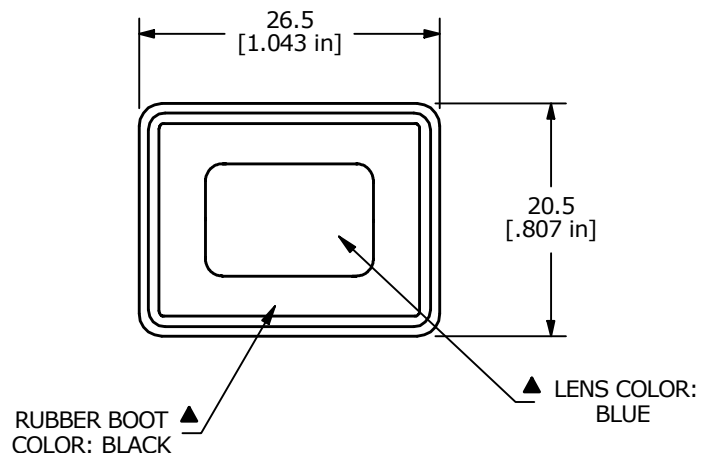



RECOMMENDED
PANEL CUT-OUT

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 16A 125/250VAC [UL]
5. MATERIAL:
CONTACT SURFACE: SILVER ALLOY
TERMINAL: SILVER PLATED COPPER
6. ELECTRICAL LIFE: 6,000 CYCLES [cURus]
7. CONTACT RESISTANCE: 20 Milli-OHMS MAX at 1A 5VDC.
8. OPERATING TEMP: -20°C TO 65°C [cUR, UR]
9. DIELECTRIC STRENGTH: >1,000 VAC 1MIN
10. LAMP VOLTAGE: 24 V BULB
11. ▲ DENOTES CRITICAL PARAMETER.

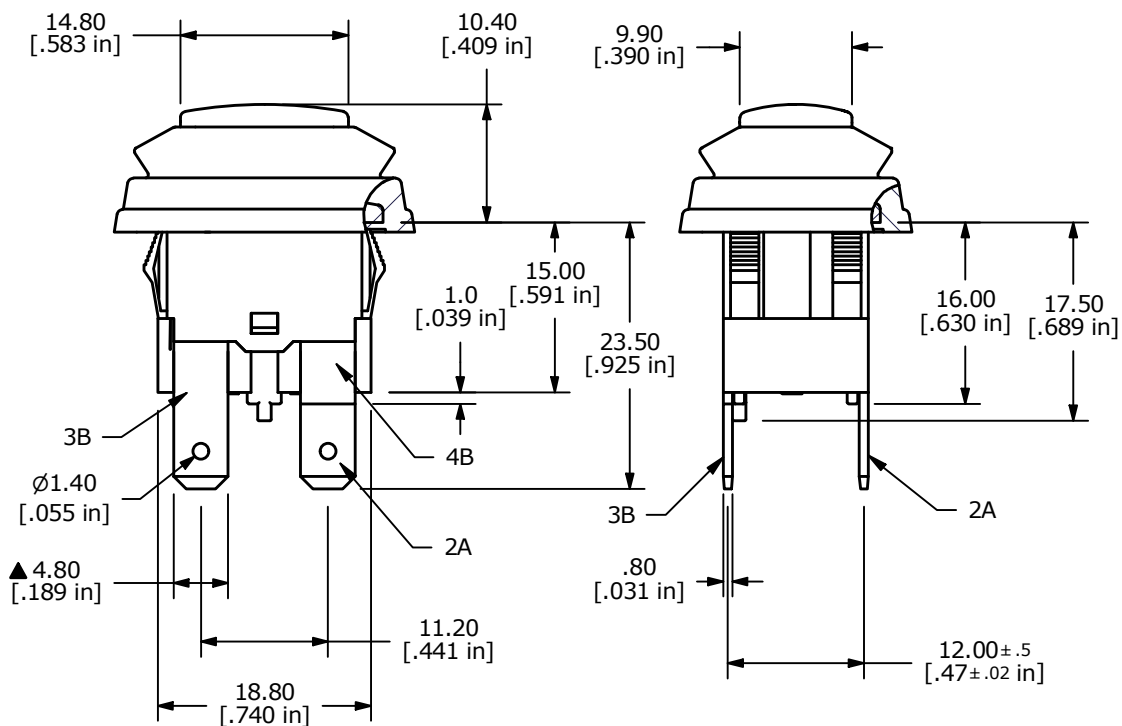

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
D	ECO-100492	REMOVE VDE FROM NOTES	12/14/21	JS						000000245
					TITLE PA4R14C1000-145					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:2	DATE 3/6/2012	DR MM	DWG 14-PA4R14C1000145	REV D	