

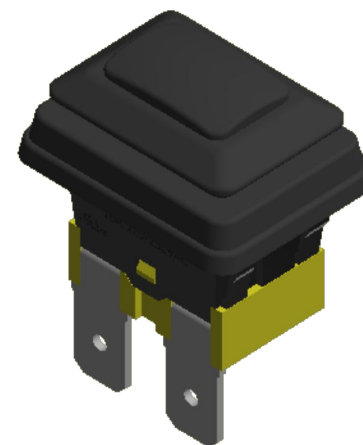




PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.8

RECOMMENDED PANEL CUT-OUT

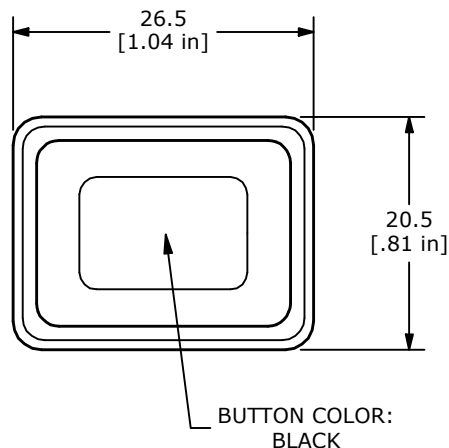

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- CONTACT RATING: 16A, 125VAC-250VAC, [cURus]
- CONTACT RESISTANCE: 20 mΩ MAX. INITIAL
- INSULATION RESISTANCE: 100 MΩ AT 500VDC
- ELECTRICAL LIFE: 6,000 [cURus]
- OPERATING TEMPERATURE: -20°C to +65°C
- DIELECTRIC STRENGTH: 1000V FOR 1 MINUTE
- ▲ DENOTES CRITICAL PARAMETER

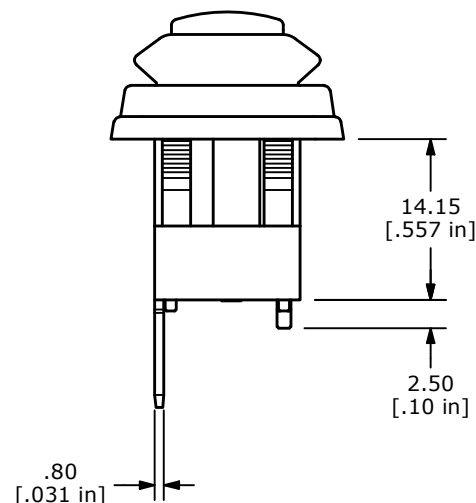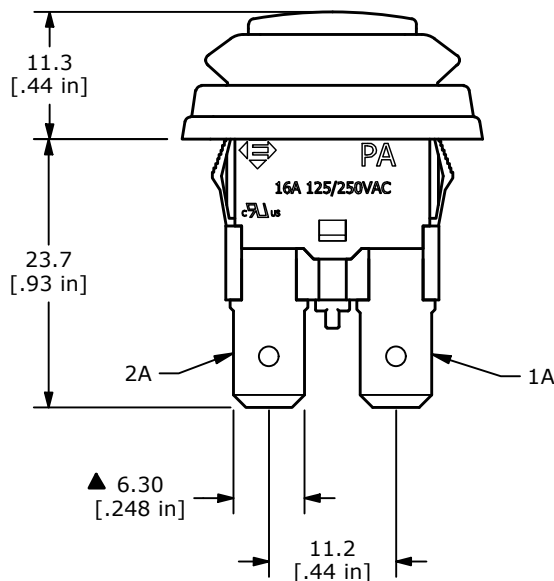

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-102594	Release	03/21/24	MW	TITLE PA4R64C1100				100127061
					SCALE	DATE	DR	DWG	REV
					2:1	3/15/2024	MW	14-PA4R64C1100	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED