
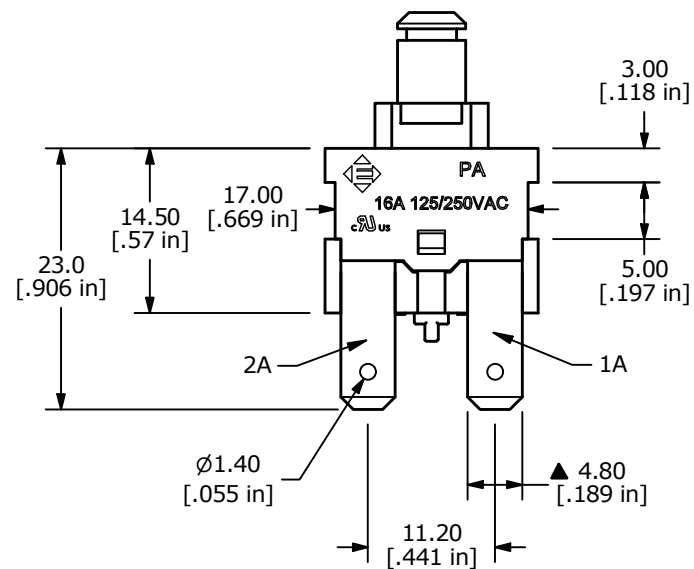
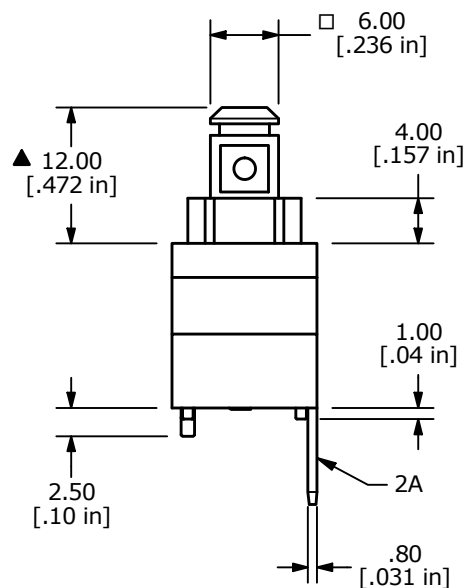


▲ SPST
OFF - (ON)
() Denotes Momentary Function

SCHEMATIC

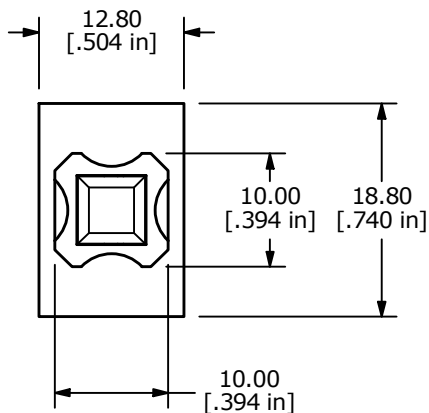

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. ELECTRICAL LIFE: 6,000 [cURus]
4. CONTACT RESISTANCE: 20 m Ω MAX. INITIAL
5. INSULATION RESISTANCE: 100 M Ω AT 500VDC
6. OPERATING TEMPERATURE: -20°C TO +65°C
7. CONTACT RATING: 16A, 125VAC-250VAC, [cURus]
8. DIELECTRIC STRENGTH: 1000V FOR 1 MINUTE
9. ACTUATION FORCE: 500 $\pm$ 200 gf
10. TRAVEL: FULL TRAVEL: 5.0mm
11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
C	ECO-100639	update rating	01/10/22	MW						000000256
					TITLE PA514C					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:2	DATE 7/25/2014	DR rc	DWG 14-PA514C	REV C	