
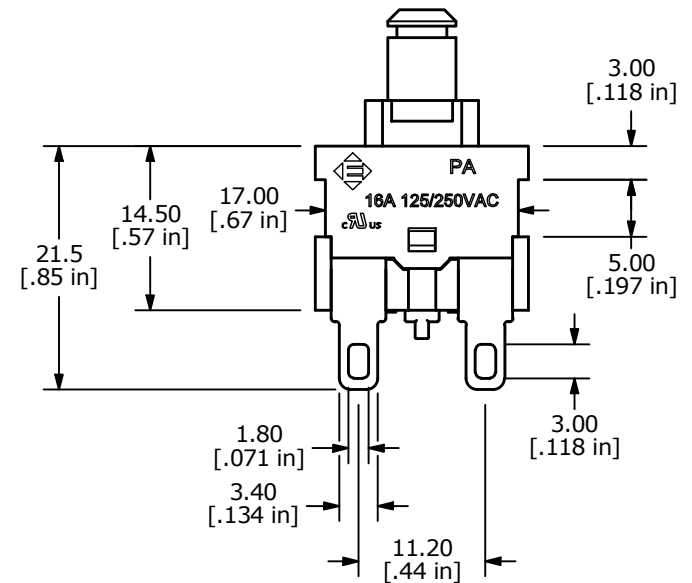
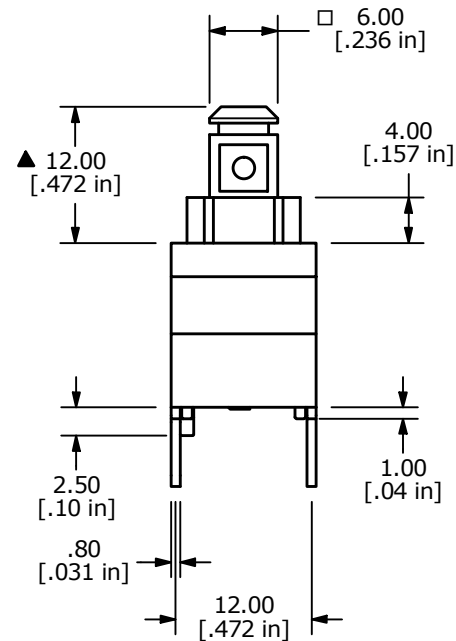


▲ DPST
OFF - ON

SCHEMATIC

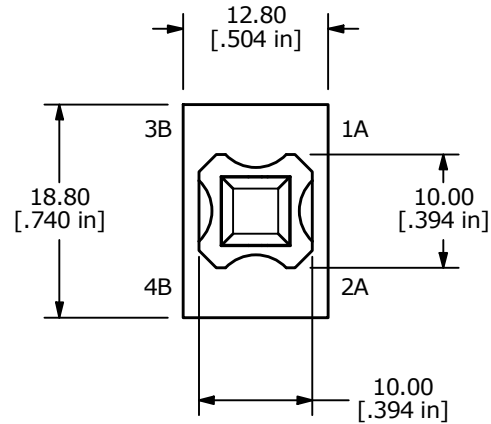

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. ELECTRICAL LIFE: 6,000 [cURus]
4. CONTACT RESISTANCE: 20m Ω MAX. INITIAL
5. INSULATION RESISTANCE: 100M Ω AT 500VDC
6. OPERATING TEMPERATURE: -20°C to +65°C
7. CONTACT RATING: 16A, 125VAC-250VAC [cURus]
8. DIELECTRIC STRENGTH: 1000V FOR 1 MINUTE
9. ACTUATION FORCE: 1000 $\pm$ 300gf
10. TRAVEL: TO LOCK POSITION: 3.0mm
FULL TRAVEL: 5.0mm
11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-100639	update rating	01/10/22	MW	TITLE PA522J				000000259
					SCALE 3:2				DATE 7/16/2020
					DR MW				DWG 14-PA522J
					REV B				

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED