

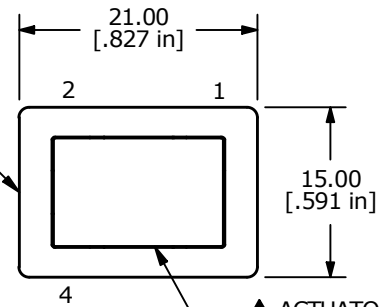


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.6


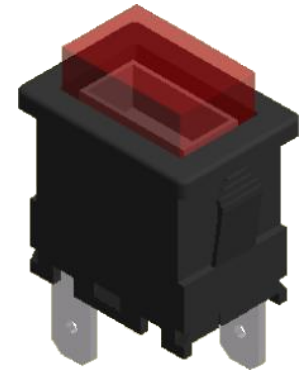


SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-2

▲ HOUSING
COLOR: BLACK▲ ACTUATOR
ILLUMINATION: RED

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. MECHANICAL LIFE: 30,000
4. ELECTRICAL LIFE: 10,000
5. CONTACT RESISTANCE: 20 mILLI OHMS
6. INSULATION RESISTANCE: 1000 MEGA OHMS
7. OPERATING TEMPERATURE: -10°C TO 55°C
8. CONTACT RATING: 15A-250 VAC, 125VAC UL APPROVED
9. DIELECTRIC STRENGTH: 1500V FOR 1 MIN
10. LAMP: NEON 250VAC
10. ▲ DENOTES CRITICAL PARAMETER
11. OPERATING FORCE: 750±100grams

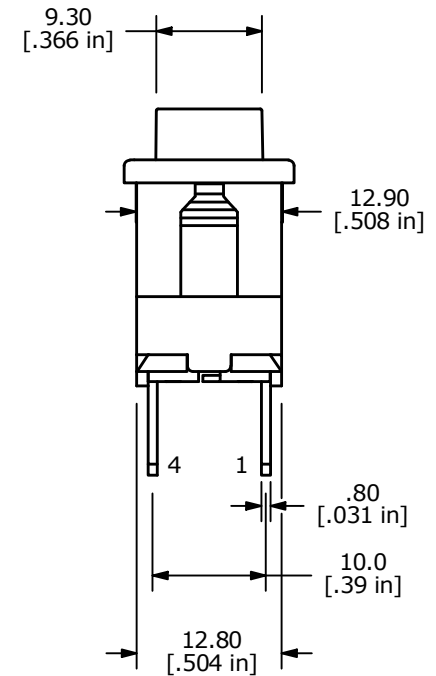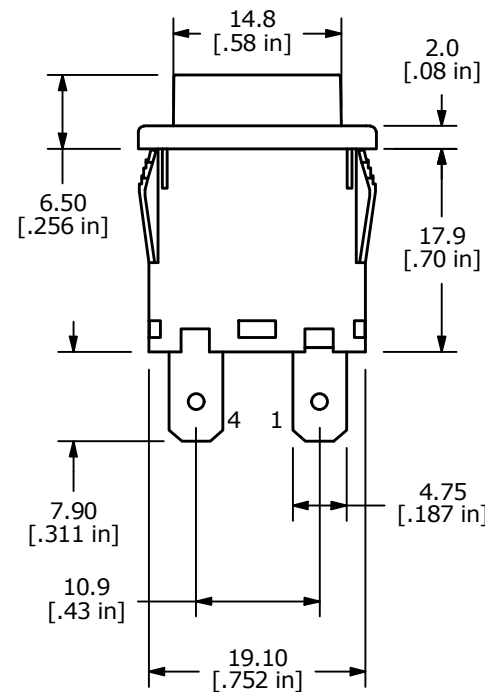

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID 100124814	
A	ECO-101977	RELEASE	05/30/23	JS	TITLE PB1973CBLKRILEF2						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 3:2	DATE 5/26/2023	DR JS	DWG M197353	REV A		