
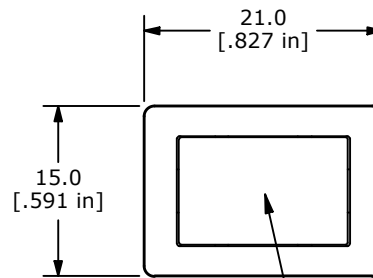
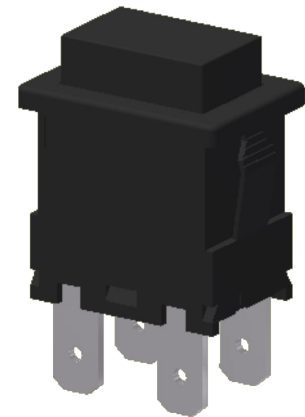


RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	19.10-19.20
1.25-2.00	19.30-19.40
2.00-3.00	19.50-19.60



▲ HOUSING
COLOR: BLACK▲ ACTUATOR
COLOR: BLACK

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-2, 3-4



NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- MECHANICAL LIFE: 30,000
- ELECTRICAL LIFE: 10,000
- CONTACT RESISTANCE: 20m OHMS
- INSULATION RESISTANCE: 1000M OHMS
- OPERATING TEMPERATURE: -10°C to 55°C
- CONTACT RATING: 15A 250 VAC, 125VAC UL APPROVED
10A 250 VAC, VDE APPROVED
- DIELECTRIC STRENGTH: 1500V FOR 1 MIN
- ▲ DENOTES CRITICAL PARAMETER
- OPERATING FORCE: 1000 ± 100 gf

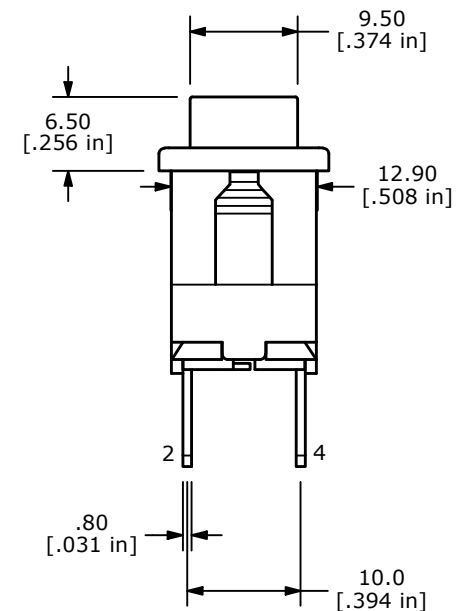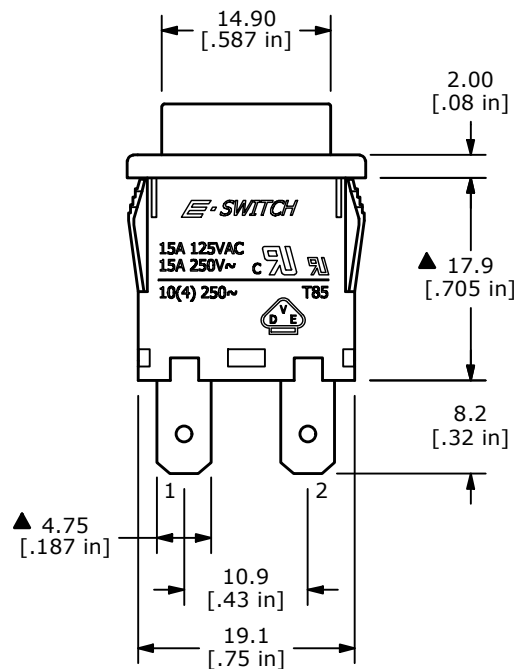

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-102432	print update	12/20/23	MW	PB1973EBLKBLKEF0				000016535
					TITLE				
					SCALE	DATE	DR	DWG	REV
					3:2	9/27/2007	BF	M197313	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED