







RECOMMENDED PANEL MOUNTING

PANEL THICKNESS	X
0.75-1.25	19.2
1.25-2.00	19.4
2.00-3.00	19.6



DPST
▲ OFF - ON

SWITCH FUNCTION	
POS. 1	POS. 2
OFF	ON
OPEN	1-2, 3-4

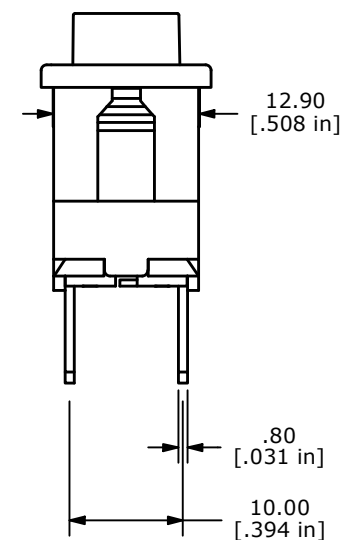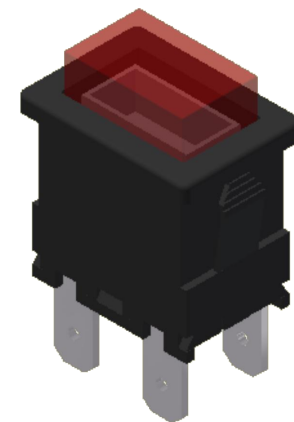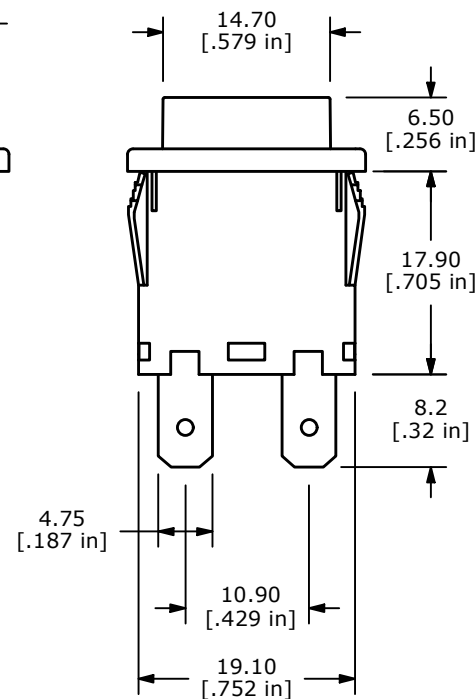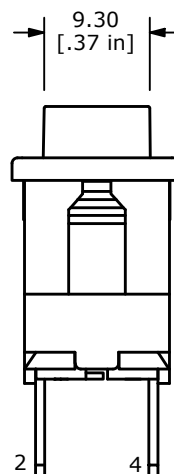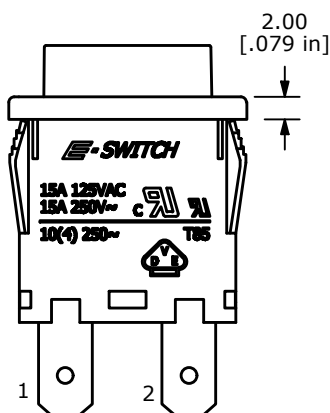

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
- MECHANICAL LIFE: 30,000 min.
- ELECTRICAL LIFE: 10,000 min.
- CONTACT RESISTANCE: 20 mILLI OHMS max.
- INSULATION RESISTANCE: 1000 MEGA OHMS min.
- OPERATING TEMPERATURE: -10°C TO 55°C
- CONTACT RATING: 15A-250 VAC, 125VAC UL APPROVED
10A 250VAC, VDE APPROVED
- DIELECTRIC STRENGTH: 1500V FOR 1 MIN
- LAMP: LED, 24VDC
- ▲ DENOTES CRITICAL PARAMETER
- OPERATING FORCE: 750±100grams

REV	ECO NO	DESCRIPTION	DATE	BY					OBJECT ID
B	ECO-103805	LAMP TO LED	12/15/25	JS	TITLE PB1973GBLKRILEF4				000016536
					SCALE	DATE	DR	DWG	REV
					3:2	2/29/2008	BLR	M197314	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED