
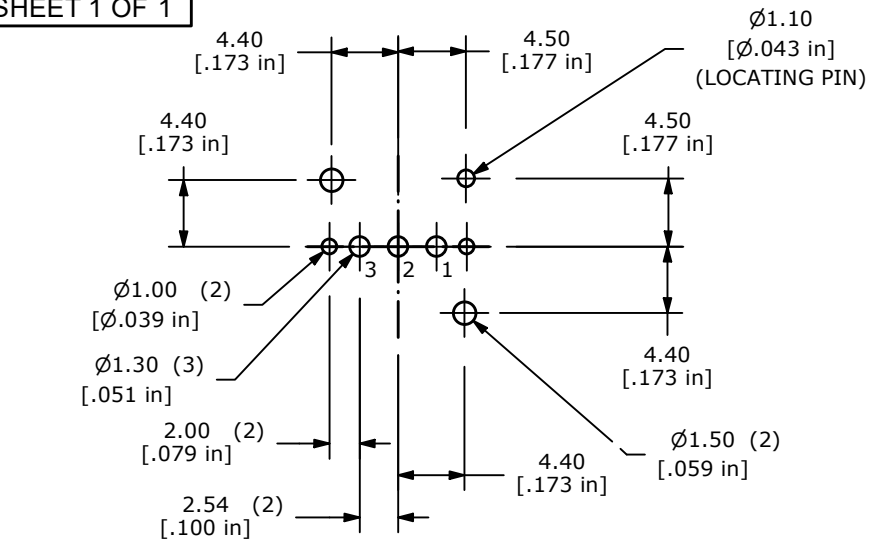
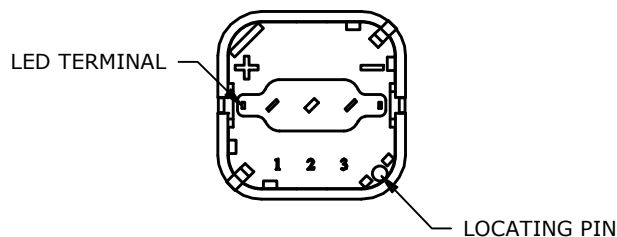
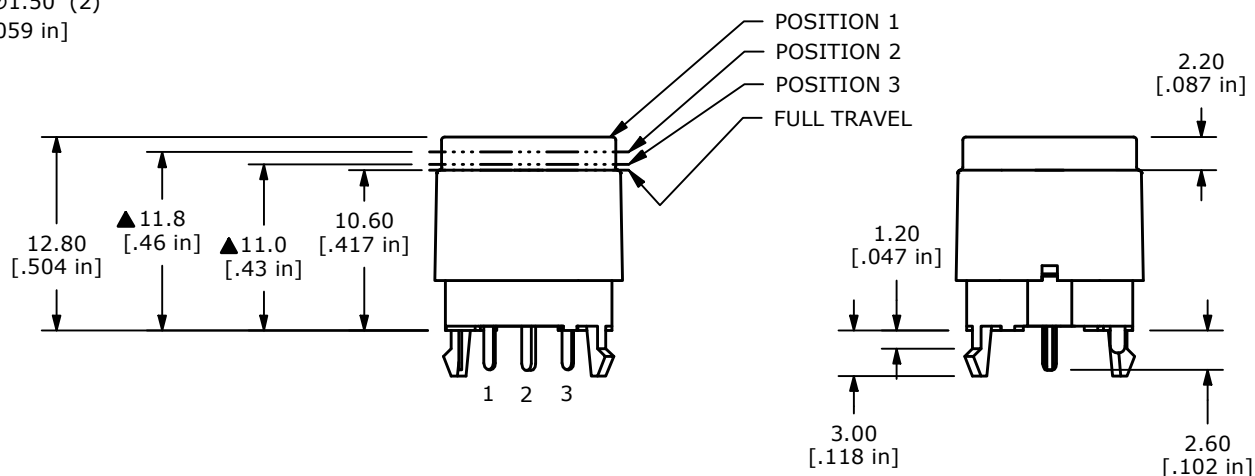



LED COLOR: GREEN
CIRCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $X.X \pm 0.4$
 $X.XX \pm 0.25$
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. RATING: 30mA @ 28VDC
5. TRAVEL: OPERATING POSITION 2: $11.8 \pm 0.2\text{mm}$
OPERATING POSITION 3: $11.0 \pm 0.2\text{mm}$
FULL TRAVEL: 2.0mm
- ▲ 6. OPERATING FORCE:
POSITION 2 OPERATING FORCE 2: $611 \pm 102\text{gf}$
POSITION 3 OPERATING FORCE 3: $1150 \pm 150\text{gf}$
7. ELECTRICAL LIFE: 20,000 CYCLES
8. MECHANICAL LIFE: 500,000 CYCLES
9. OPERATING TEMP. -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER
11. CONTACTS: BRASS, GOLD PLATED
TERMINALS: BRASS, GOLD FLASH PLATED

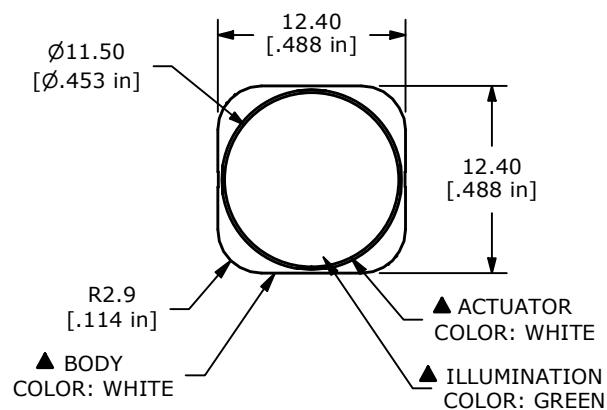

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
B	ECO-102696	CORRECT PCB LAYOUT	05/03/24	JS	TITLE PB350DTRG					100126429
A	ECO-102386	RELEASE	12/19/23	JS						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 12/6/2023	DR JS	DWG T003510	REV B	