



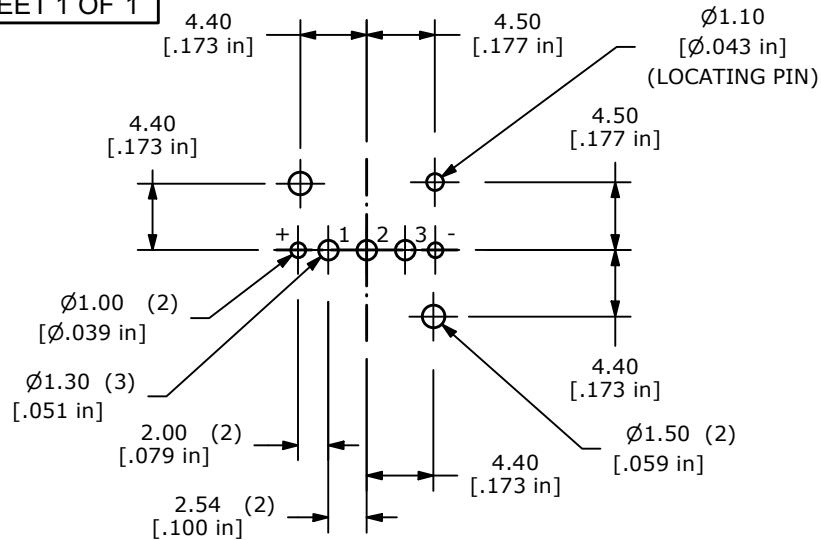






P.C.B LAYOUT

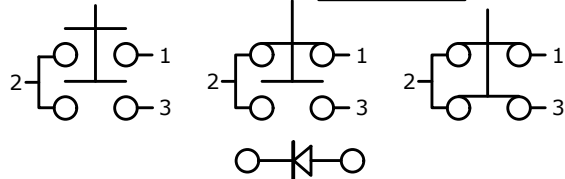

LED COLOR: RED
CIRCUIT: SPDT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. RATING: 30mA @ 28VDC
5. TRAVEL: OPERATING POSITION 2: 11.8 ± 0.2 mm
OPERATING POSITION 3: 11.0 ± 0.2 mm
FULL TRAVEL: 2.0mm
6. OPERATING FORCE:
POSITION 2 OPERATING FORCE 2: 611 ± 102 gf
POSITION 3 OPERATING FORCE 3: 1150 ± 150 gf
7. ELECTRICAL LIFE: 20,000 CYCLES
8. MECHANICAL LIFE: 500,000 CYCLES
9. OPERATING TEMP. -40°C TO 85°C
10. DENOTES CRITICAL PARAMETER
11. CONTACTS: BRASS, GOLD PLATED
TERMINALS: BRASS, GOLD FLASH PLATED

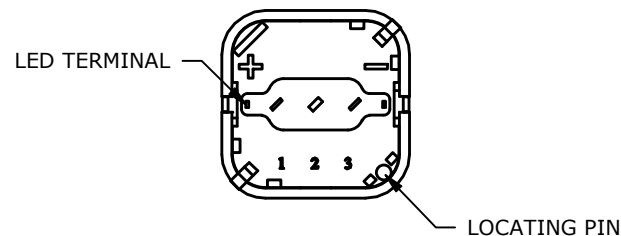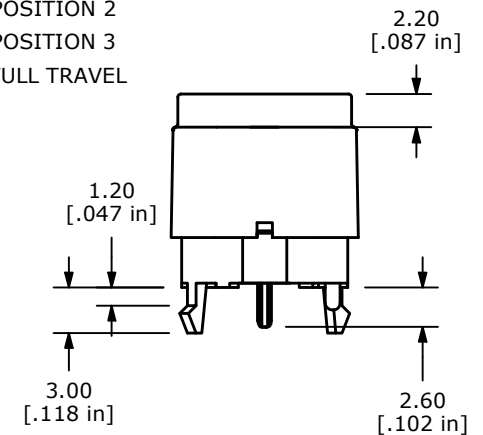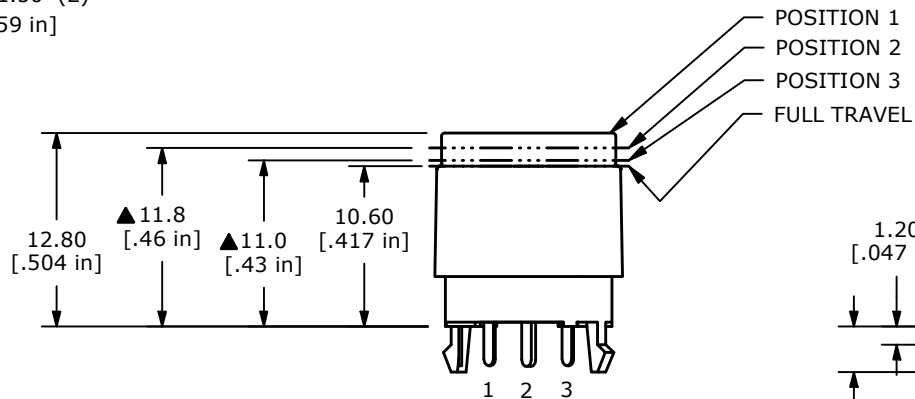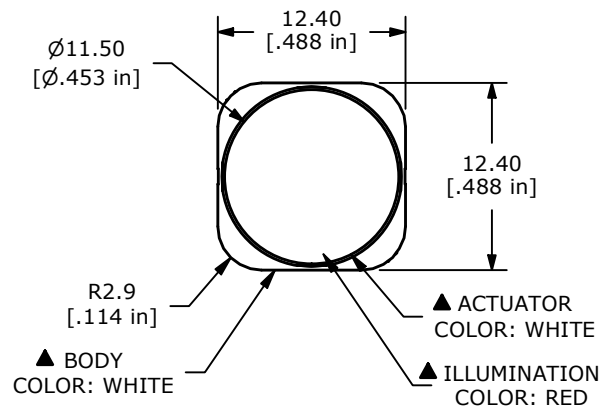

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102696	CORRECT PCB LAYOUT	05/03/24	JS	TITLE PB350DTRR				100126426
A	ECO-102386	RELEASE	12/19/23	JS					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 12/14/2023	DR JS	DWG T003507	REV B