
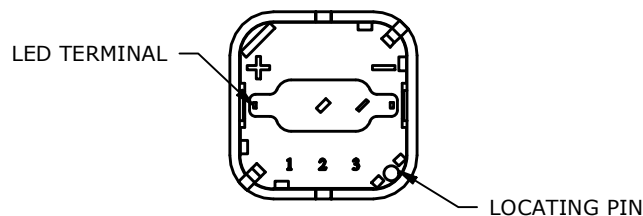
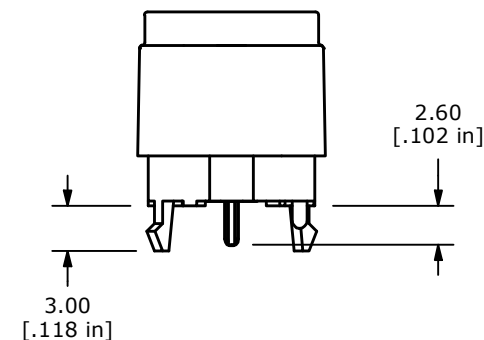
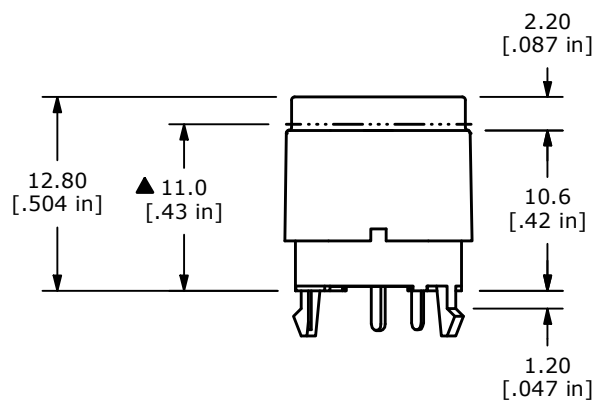



LED COLOR: RED  
▲ CIRCUIT: SPST

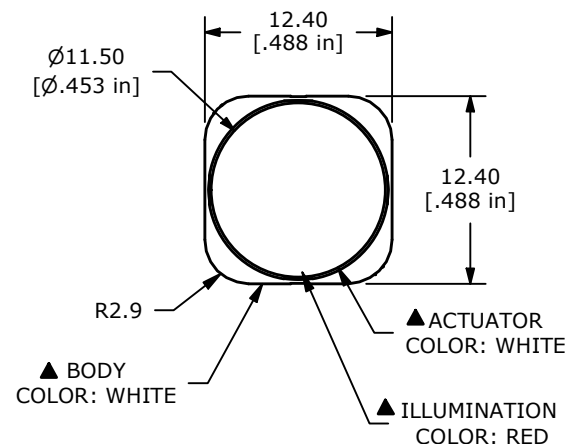

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
  3. TERMINAL NUMBERS FOR REF. ONLY
  - ▲ 4. RATING: 30mA @ 28VDC
  5. TRAVEL: ELECTRICAL MAKE:  $11.0 \pm 0.2\text{mm}$   
FULL TRAVEL:  $2.0 \pm 0.30\text{mm}$
  6. OPERATING FORCE:  $430 \pm 102\text{gf}$
  7. ELECTRICAL LIFE: 20,000 CYCLES
  8. MECHANICAL LIFE 500,000 CYCLES
  9. OPERATING TEMP. -40°C TO 85°C
  10. ▲ DENOTES CRITICAL PARAMETER
  11. CONTACTS: BRASS, GOLD PLATED  
TERMINALS: BRASS, GOLD FLASH PLATED

REV	ECO NO	DESCRIPTION	DATE	BY	<div> E-SWITCH®</div>					OBJECT ID
B	ECO-102679	11.0 WAS 11.8 AND 430 WAS 490	05/03/24	JS	TITLE PB350STRR					100126354
A	ECO-102373	RELEASE	12/18/23	JS						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 12/12/2023	DR JS	DWG T003501	REV B	