
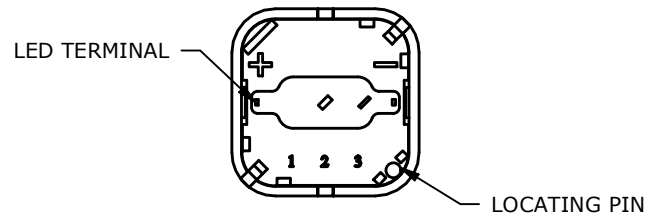
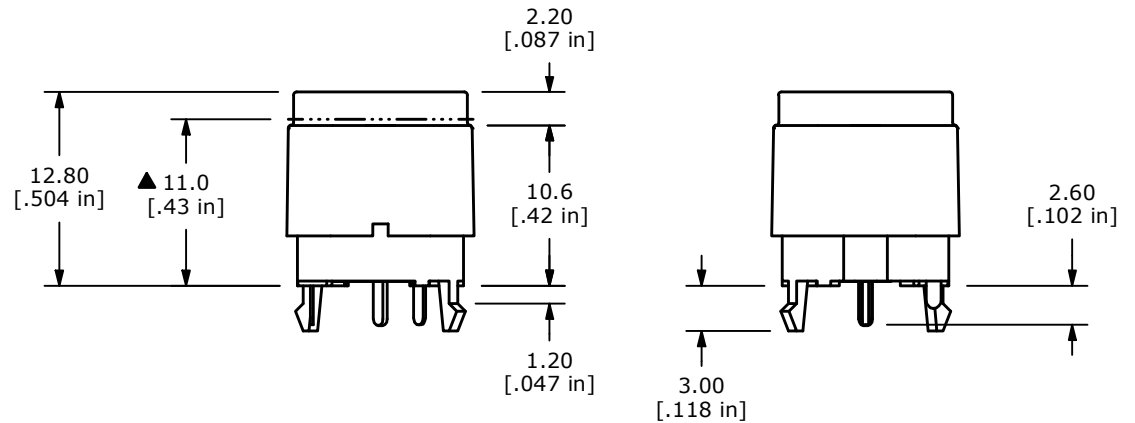



LED COLOR: YELLOW  
▲CIRCUIT: SPST

## NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲4. RATING: 30mA @ 28VDC
5. TRAVEL: ELECTRICAL MAKE: 11.0  $\pm$  0.2mm  
FULL TRAVEL: 2.0  $\pm$  0.30mm
6. OPERATING FORCE: 430  $\pm$  102gf
7. ELECTRICAL LIFE: 20,000 CYCLES
8. MECHANICAL LIFE 500,000 CYCLES
9. OPERATING TEMP. -40°C TO 85°C
10. ▲ DENOTES CRITICAL PARAMETER
11. CONTACTS: BRASS, GOLD PLATED  
TERMINALS: BRASS, GOLD FLASH PLATED

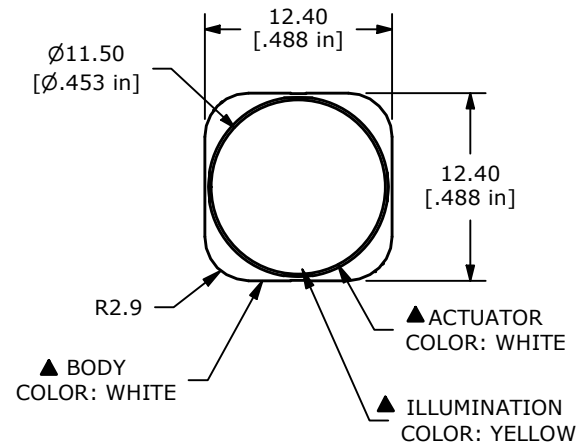

REV	ECO NO	DESCRIPTION	DATE	BY	 <b>E-SWITCH®</b>				OBJECT ID
B	ECO-102679	11.0 WAS 11.8 AND 430 WAS 490	05/03/24	JS					100126360
A	ECO-102373	RELEASE	12/18/23	JS	TITLE PB350STRY				
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 12/6/2023	DR JS	DWG T003503	REV B