

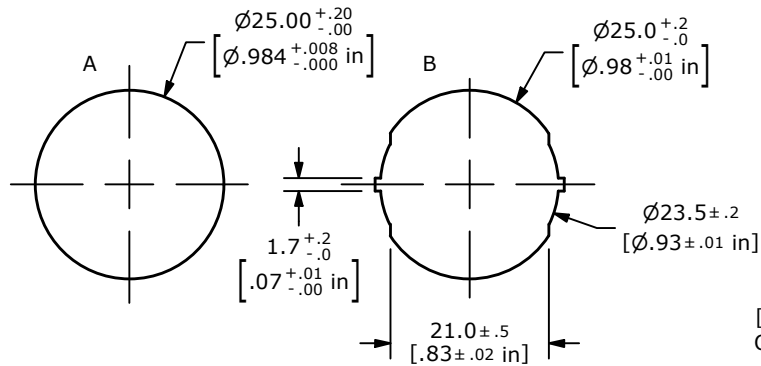
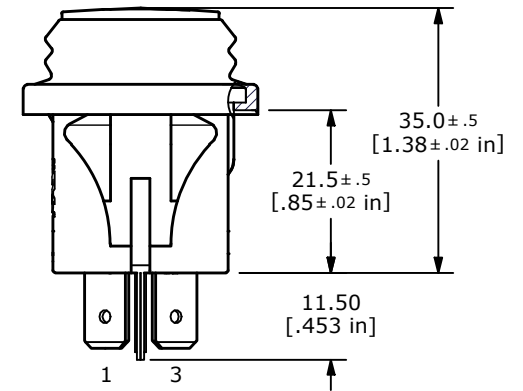
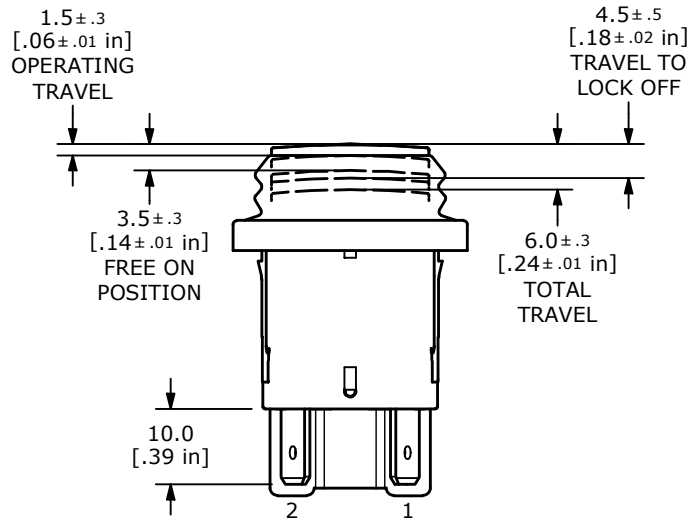


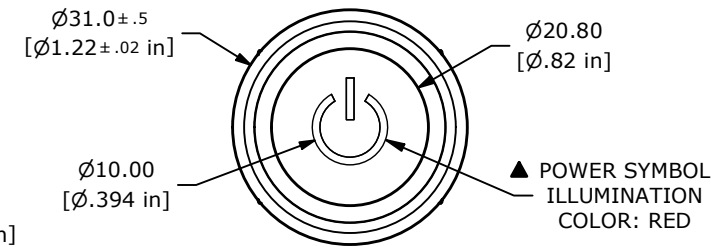


RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 0.7~2.5mm

SWITCH FUNCTION	
POS. 1	POS. 2
OPEN	1-3, 2-4

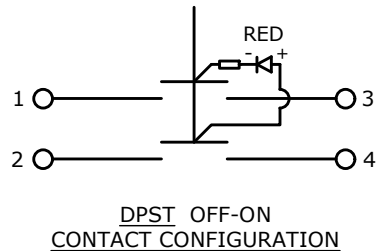

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.5
X.XX = ±0.30
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. RATING: 16(16)A @ 127VAC
- ▲ 5. ILLUMINATION VOLTAGE: 127VAC
6. CONTACT RESISTANCE: 50mΩ MAX.
7. INSULATION RESISTANCE: 2MΩ @ 500VDC
8. DIELECTRIC STRENGTH: 1,300VAC MIN. FOR 1 MINUTE
9. ELECTRICAL LIFE: 50,000 CYCLES
10. OPERATING TEMPERATURE: 0°C to 55°C
11. ACTUATION FORCE: 13 ± 5N (AT 5mm TRAVEL)
12. INGRESS PROTECTION: IP66 (AFTER MOUNTING)
13. ▲ DENOTES CRITICAL PARAMETER

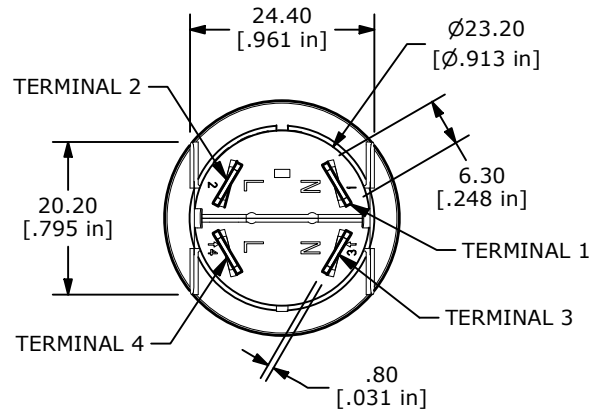

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103501	Release	07/01/25	MW	TITLE PB66EE2CR6P11				100130494
					SCALE	DATE	DR	DWG	REV
					1:1	6/24/2025	MW	34-PB66EE2CR6P11	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED