
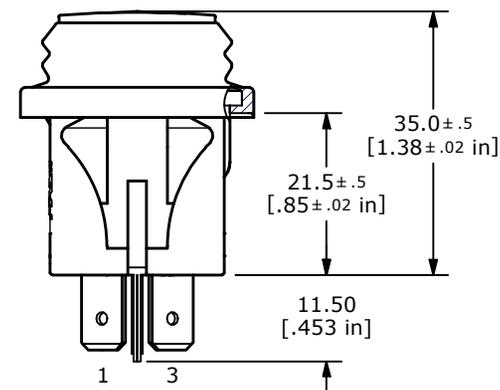
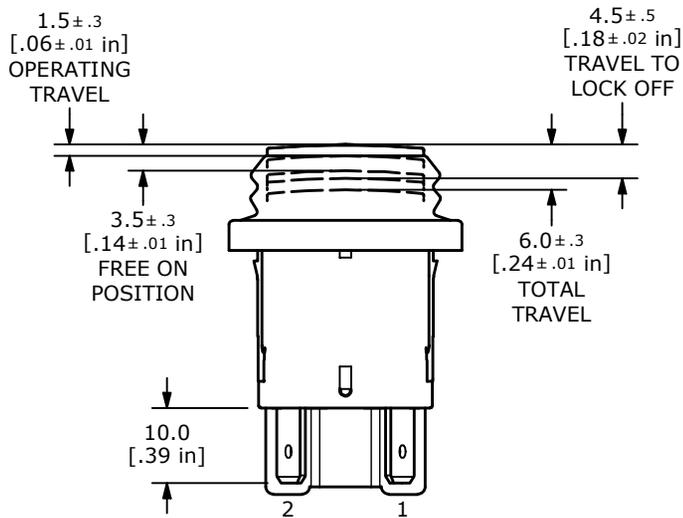
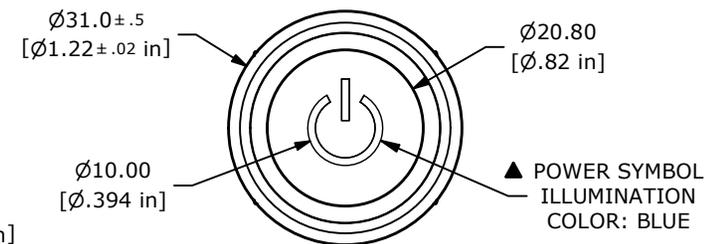



RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 0.7~2.5mm

SWITCH FUNCTION	
POS. 1	POS. 2
OPEN	1-3, 2-4

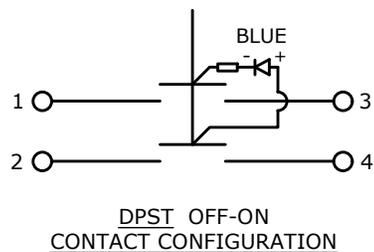

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ±0.5
X.XX = ±0.30
- TERMINAL NUMBERS FOR REF. ONLY
- RATING: 16(16)A @ 127VAC
- ILLUMINATION VOLTAGE: 127VAC
- CONTACT RESISTANCE: 50mΩ MAX.
- INSULATION RESISTANCE: 2MΩ @ 500VDC
- DIELECTRIC STRENGTH: 1,300VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 50,000 CYCLES
- OPERATING TEMPERATURE: 0°C to 55°C
- ACTUATION FORCE: 13 ± 5N (AT 5mm TRAVEL)
- INGRESS PROTECTION: IP66 (AFTER MOUNTING)
- ▲ DENOTES CRITICAL PARAMETER

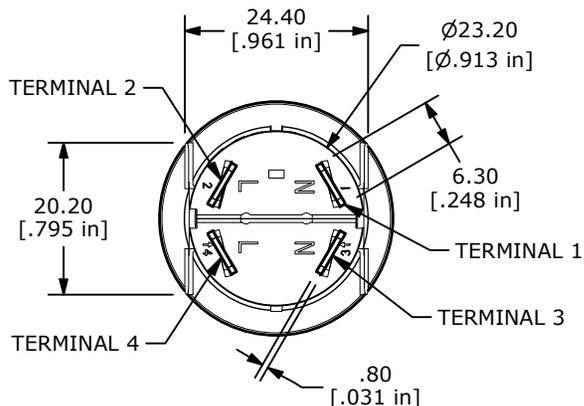

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-103501	Release	07/01/25	MW



OBJECT ID
100130496

TITLE PB66EE2CR6P41				
SCALE 1:1	DATE 6/24/2025	DR MW	DWG 34-PB66EE2CR6P41	REV A