

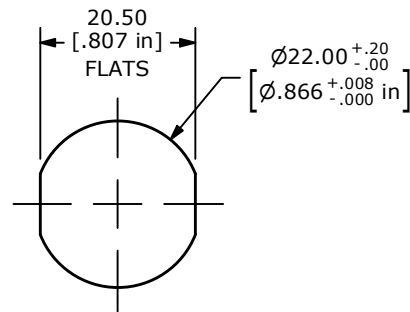




**SCHEMATIC**  
 DPST Non-Illuminated  
 NORMALLY OPEN  
 OFF (ON)  
 (ON) = MOMENTARY

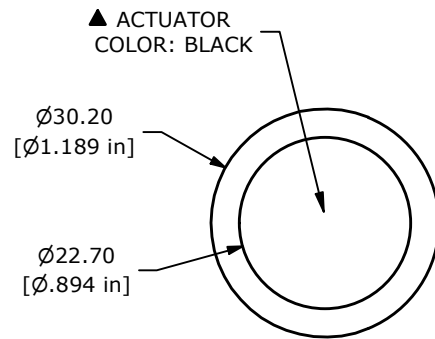

**PANEL CUT-OUT**  
 PANEL THICKNESS 6mm MAX.

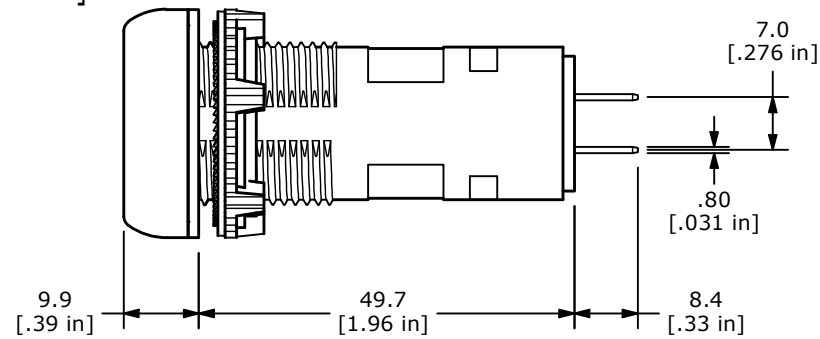

▲ ACTUATOR  
 COLOR: BLACK

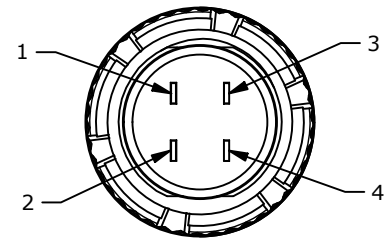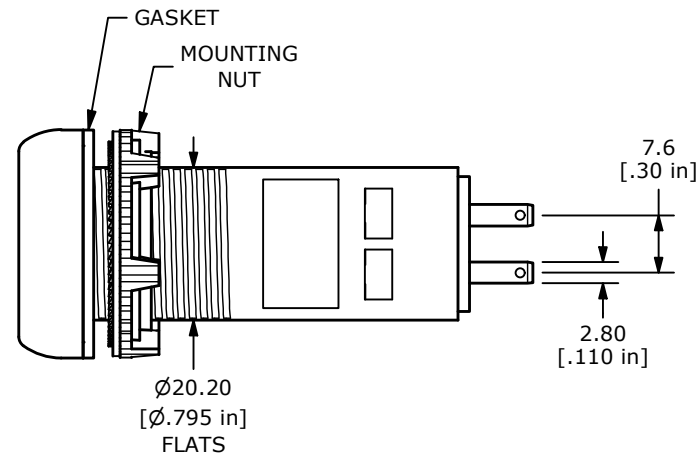

## NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X =  $\pm 0.4$   
 X.XX =  $\pm 0.25$
3. TERMINAL NUMBERS FOR REF ONLY
4. TERMINAL/CONTACT MATERIAL: SILVER PLATED
5. RATING: 6A @ 230VAC, 1.5A @ 24VDC
6. ELECTRICAL LIFE: 500,000 CYCLES
7. OPERATING TEMPERATURE: -25°C to 65°C
8. ▲ DENOTES CRITICAL PARAMETER.
9. INGRESS PROTECTION: IP65
- ▲ 10. HARDWARE SUPPLIED: GASKET and MOUNTING NUT

| REV | ECO NO     | DESCRIPTION  | DATE     | BY | E-SWITCH®         |           |    |         | OBJECT ID |
|-----|------------|--------------|----------|----|-------------------|-----------|----|---------|-----------|
| B   | ECO-104284 | Print update | 08/10/26 | MW | TITLE PBA22F2CBLK |           |    |         | 100131795 |
|     |            |              |          |    | SCALE             | DATE      | DR | DWG     | REV       |
|     |            |              |          |    | 1:1               | 1/14/2026 | MW | W100201 | B         |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO  
 E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED