
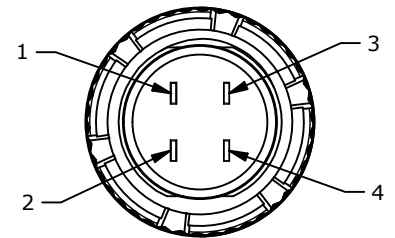
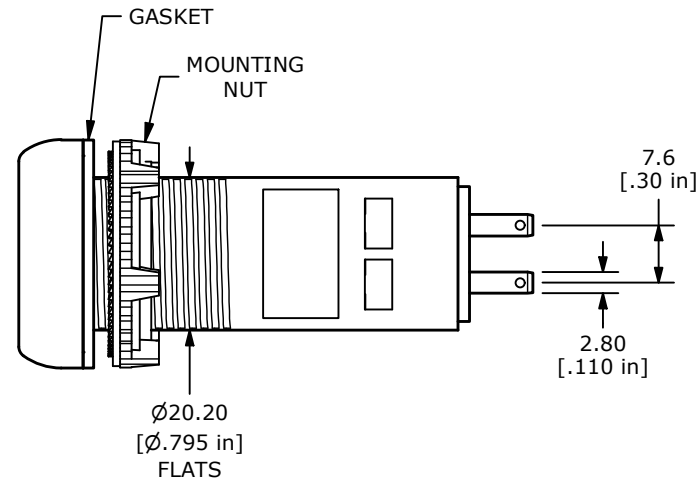
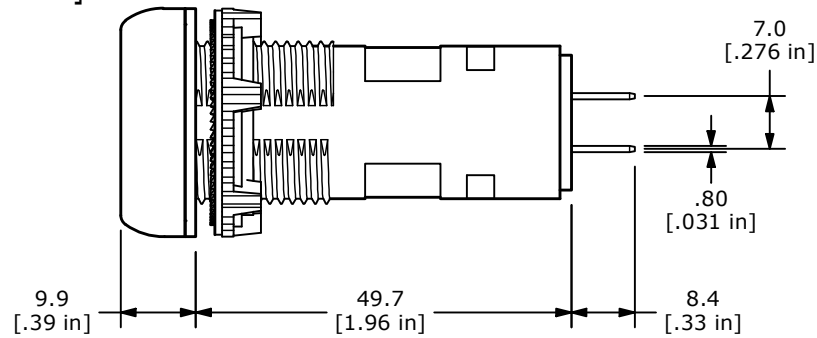
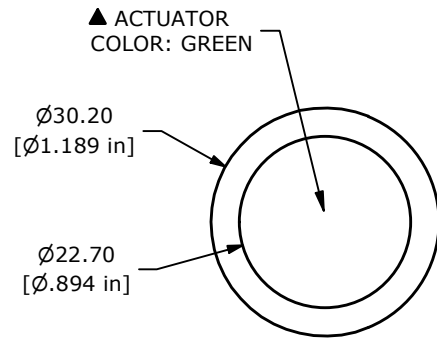


SCHEMATIC
 DPST Non-Illuminated
 NORMALLY CLOSED
 ON (OFF)
 (OFF) = MOMENTARY

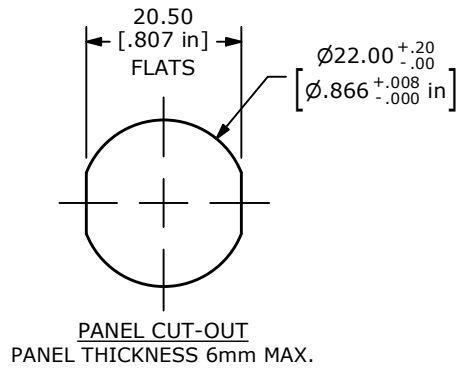

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
 X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. TERMINAL/CONTACT MATERIAL: SILVER PLATED
5. RATING: 6A @ 230VAC, 1.5A @ 24VDC
6. ELECTRICAL LIFE: 500,000 CYCLES
7. OPERATING TEMPERATURE: -25°C to 65°C
8. ▲ DENOTES CRITICAL PARAMETER.
9. INGRESS PROTECTION: IP65
- ▲ 10. HARDWARE SUPPLIED: GASKET and MOUNTING NUT

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-104284	Print update	08/10/26	MW	TITLE PBA22F2DGRN				100132023
					SCALE	DATE	DR	DWG	REV
					1:1	2/9/2026	MW	W100205	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
 E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED