

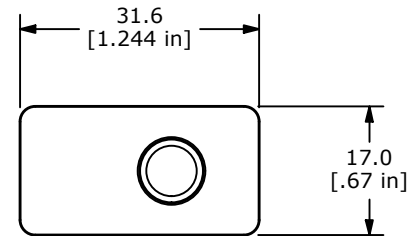


PANEL CUTOUT


PANEL THICKNESS 1mm to 2.5mm




▲ HOUSING
COLOR: WHITE

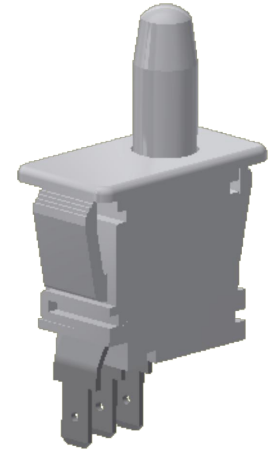

▲ SPDT
CONTACT CONFIGURATION
 FUNCTION: ON-(ON)
 (ON) = MOMENTARY

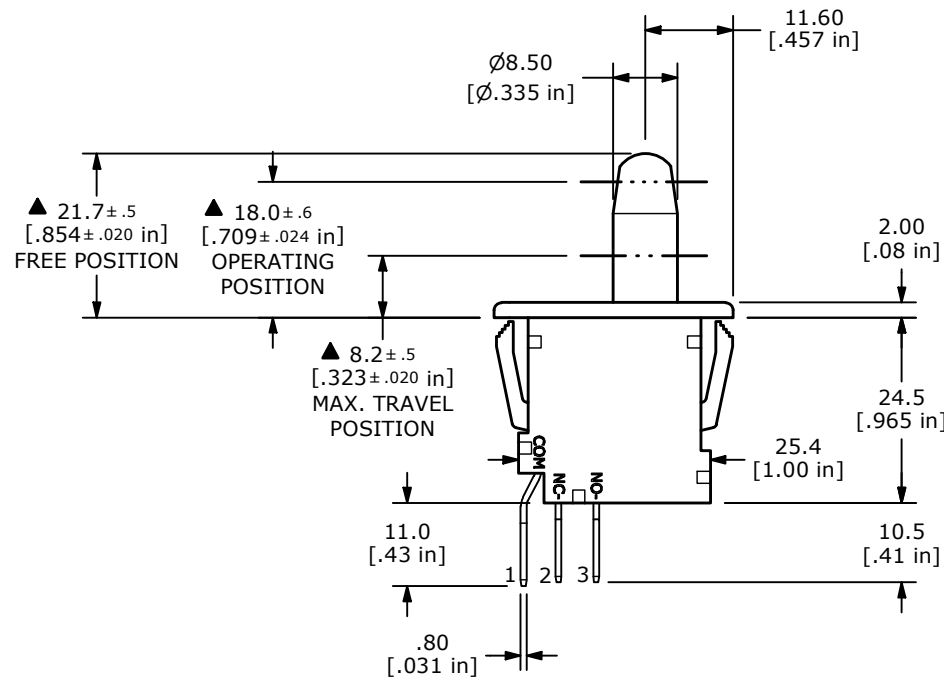

▲ ACTUATOR
COLOR: WHITE

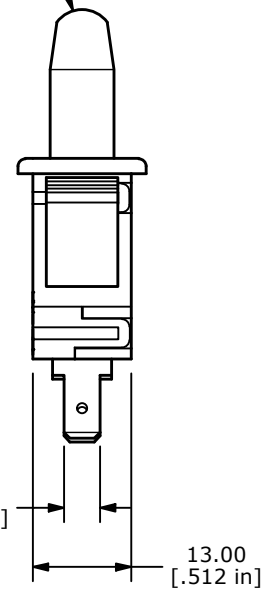

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 3. TERM. NOS. FOR REFERENCE ONLY
 4. ELECTRICAL LIFE: 6,000 CYCLES
 5. OPERATING TEMP: 0°C to 85°C
 6. CONTACT RESISTANCE: 30mΩ MAX. INITIAL
 7. ▲ DENOTES CRITICAL PARAMETER
 8. CONTACT RATING: UL 16A 125VAC, 12A 250VAC, 1HP/250VAC

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
A	ECO-102804	RELEASE	06/18/24	JS						100127614
					TITLE PP1-1B7-2A2					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 1:1	DATE 6/11/2024	DR JS	DWG 34-PP11B72A2	REV A	