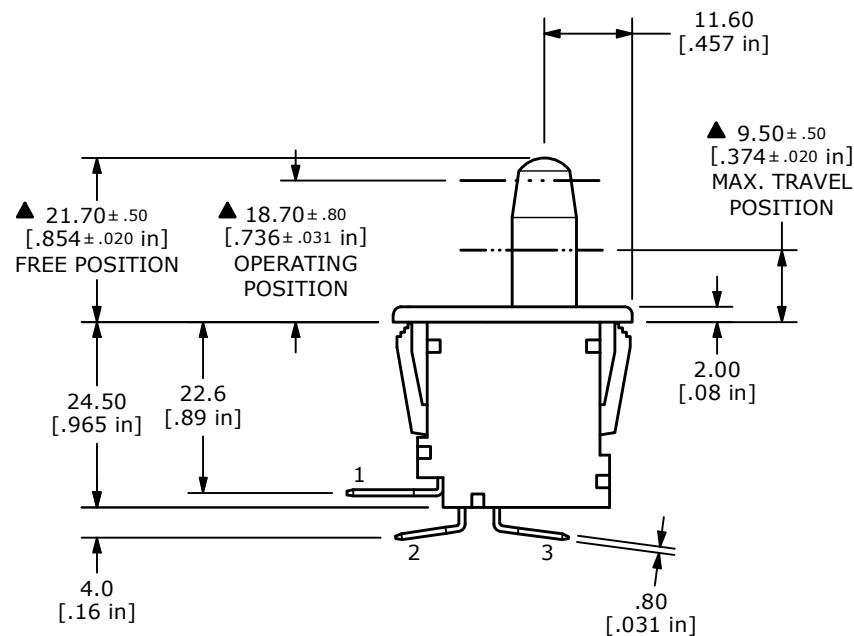

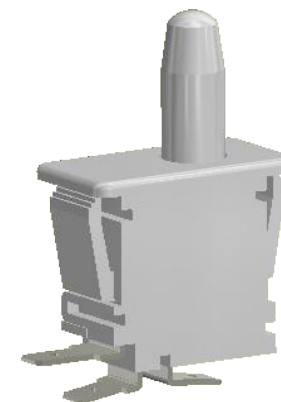
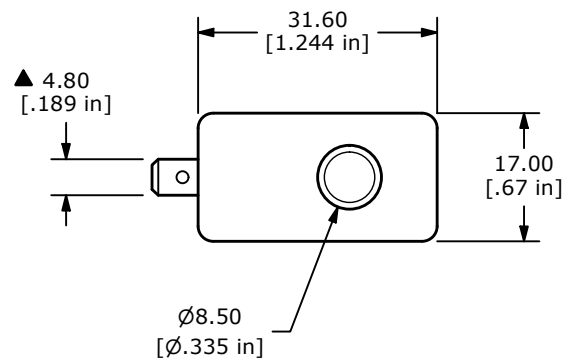
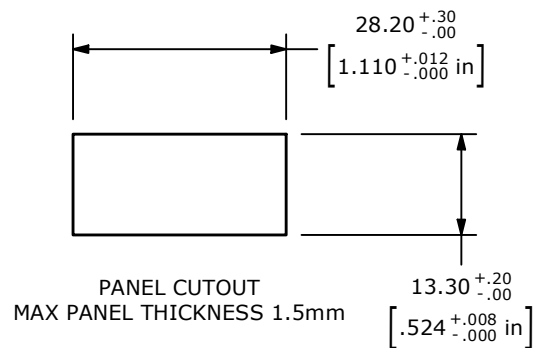


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY
4. ELECTRICAL LIFE: 6,000 CYCLES
5. OPERATING TEMP: 0°C TO 85°C
6. CONTACT RESISTANCE: 30mΩ MAX. INITIAL
7. 2002/95/EC (ROHS) COMPLIANT
8. ▲ DENOTES CRITICAL PARAMETER
9. CONTACT RATING: UL 16A 125VAC, 12A 250VAC, 1HP/250VAC

C	21089	9.50 WAS 12.10	4/2/13	EBP	 E-SWITCH®					OBJECT ID 000000998		
B	21034	ADD TOLERANCE TO ACTUATOR POS	2/14/13	EBP	TITLE PP1-DB7-2A2							
A	20592	New Release	5/7/12	rc								
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE 1:1		DATE 2/14/2012		DR rc	DWG 34-PP1DB72A2		REV C
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED												

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED