


SUGGESTED PANEL CUTOUT
PANEL THICKNESS 1.8~2.2


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-3, 4-2	1-5, 6-2

(ON)=MOMENTARY






▲ CONTACT CONFIGURATION
() DENOTES MOMENTARY
FUNCTION

- NOTES:
1. ALL DIMENSIONS IN MM
 2. GENERAL TOLERANCE: X.X=±0.5
X.XX=±0.3
 3. TERM. NOS. FOR REFERENCE ONLY
 4. ELECTRICAL LIFE: 6,000 CYCLES
 5. RATINGS:
UL 1054: [cURus]
12/16A 250/125V
1HP 250/125V ~ 85°C
UL 61058: [cURus]
10R (4)A 277VAC 5E4
10 (6)A 250VAC [TUV] 5E4
 6. MECHANICAL LIFE: 50,000 CYCLES
 7. CONTACT RESISTANCE: 10mΩ MAX. INITIAL
 8. INSULATION RESISTANCE: 2MΩ MIN.
 9. OPERATING TEMP: 0°C TO 85°C
 10. INGRESS PROTECTION: IP40
 11. ▲ DENOTES CRITICAL PARAMETER

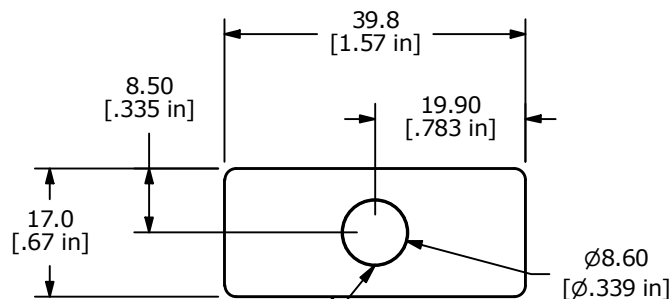

▲ HOUSING
and ACTUATOR
COLOR: WHITE

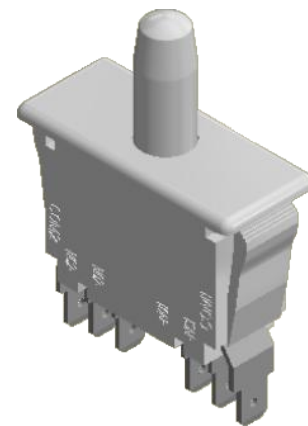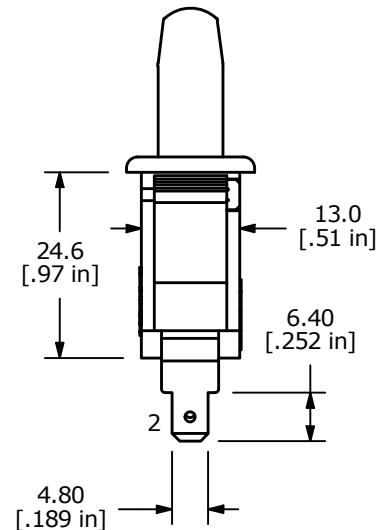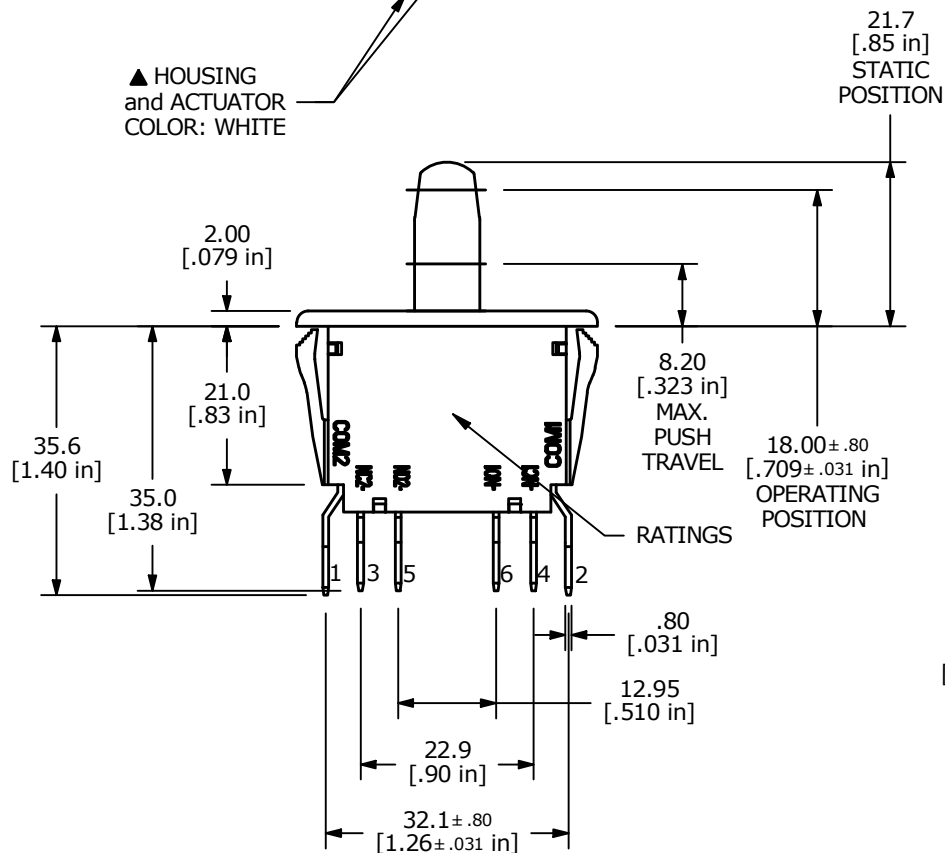

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-101987	RELEASE	06/09/23	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

OBJECT ID
100124848

TITLE PP2-1H1-2A2

SCALE
1:1

DATE
6/1/2023

DR
JS

DWG
34-PP21H12A2

REV
A