



SUGGESTED PANEL CUTOUT
PANEL THICKNESS 1.8~2.2

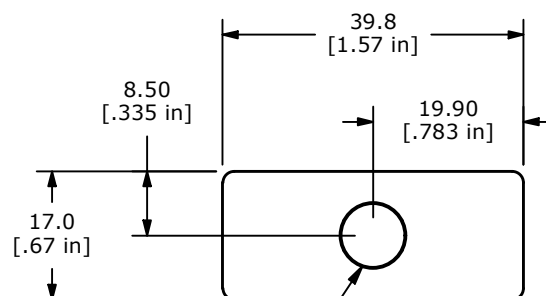


▲ HOUSING
and ACTUATOR
COLOR: WHITE

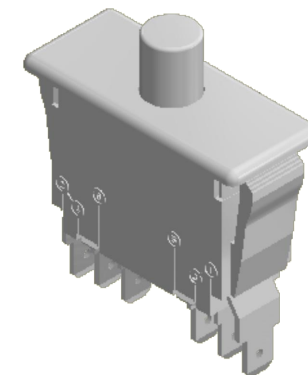

SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-3, 4-2	1-5, 6-2

(ON)=MOMENTARY





DPI

▲ CONTACT CONFIGURATION
() DENOTES MOMENTARY
FUNCTION

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.5$
 $X.XX = \pm 0.3$
3. TERM. NOS. FOR REFERENCE ONLY
4. ELECTRICAL LIFE: 6,000 CYCLES
5. RATINGS:
 - UL 1054: [cURus]
 - 12/16A 250/125V
 - 1HP 250/125V ~ 85°C
 - UL 61058: [cURus]
 - 10 (4)A 277VAC 5E4
 - 10 (6)A 250VAC [TUV] 5E4
6. MECHANICAL LIFE: 50,000 CYCLES
7. CONTACT RESISTANCE: 10mΩ MAX. INITIAL
8. INSULATION RESISTANCE: 2MΩ MIN.
9. OPERATING TEMP: 0°C TO 85°C
10. INGRESS PROTECTION: IP40
11. ▲ DENOTES CRITICAL PARAMETER

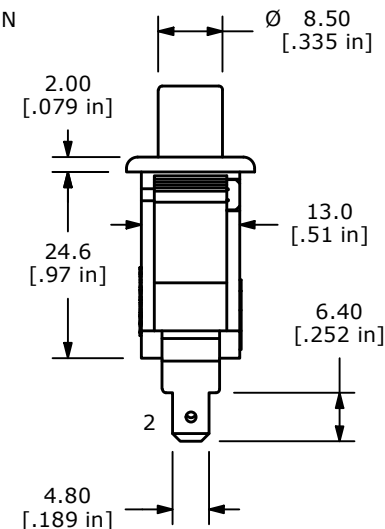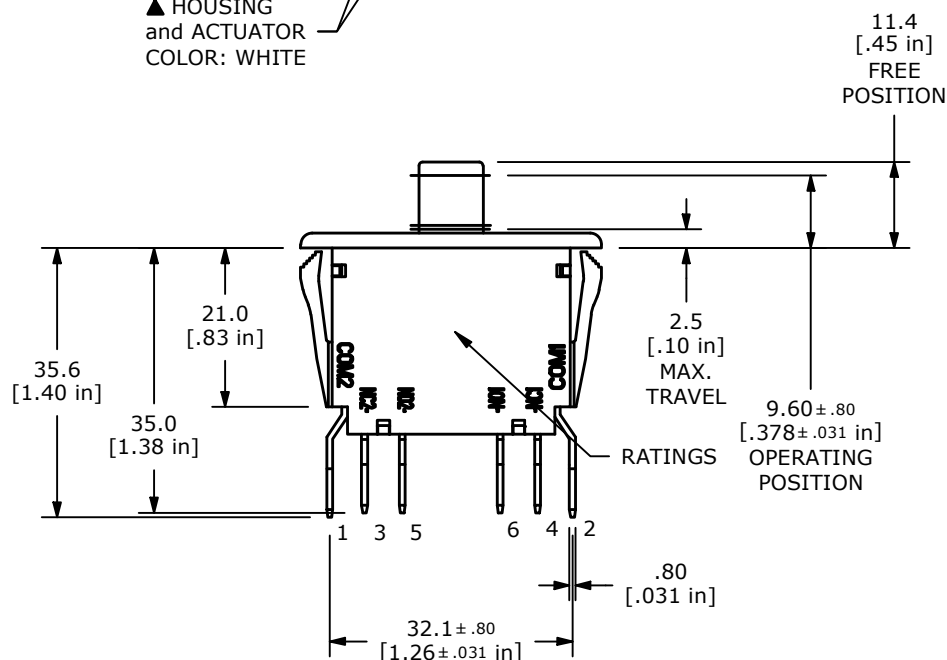

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
B	ECO-102109	CORRECT RATINGS	07/14/23	JS	TITLE PP2-1H1-2D2					100124807
A	ECO-101973	RELEASE	06/08/23	JS						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV	
					1:1	5/30/2023	JS	34-PP21H12D2	B	