

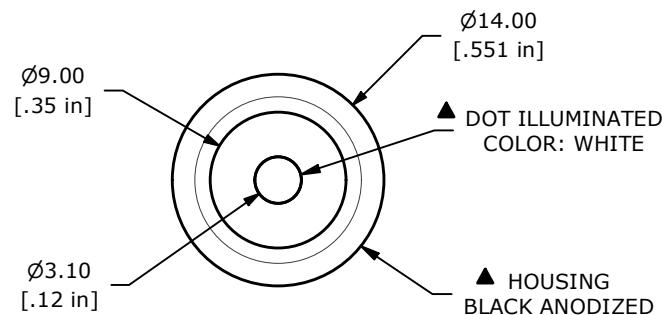
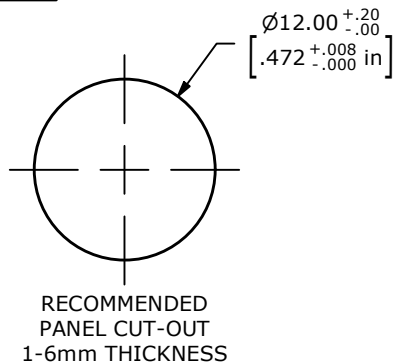
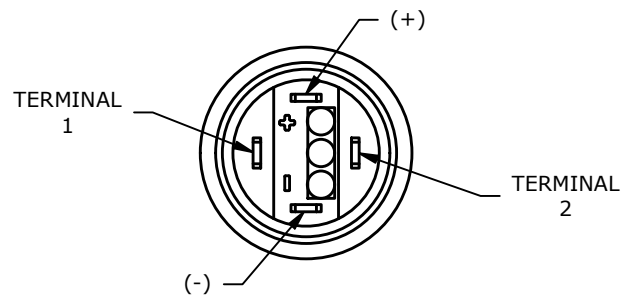
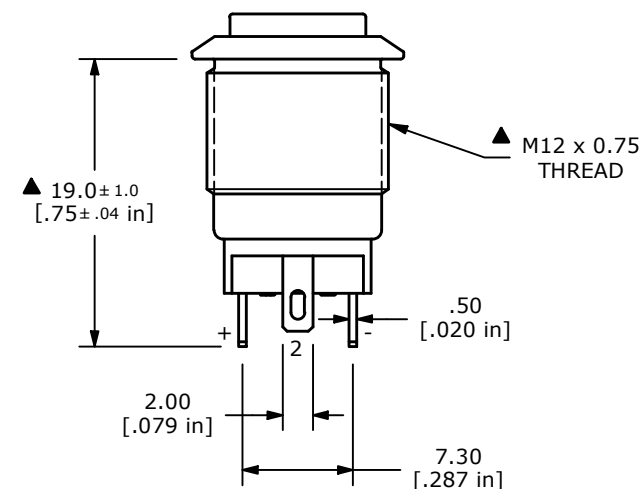


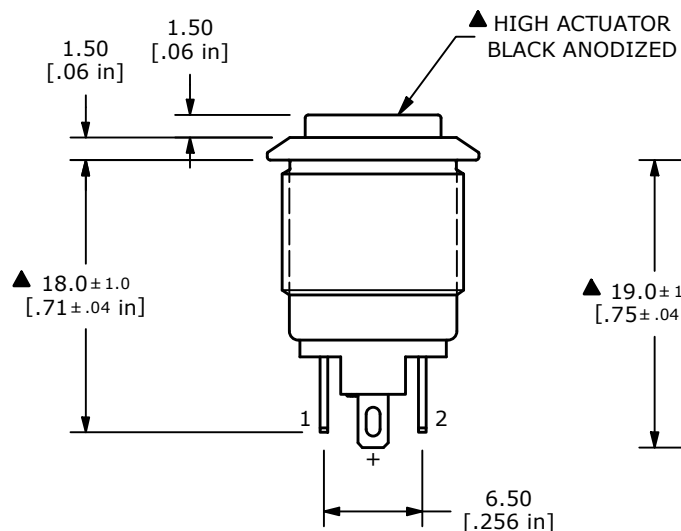

▲ SWITCH FUNCTION

POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY



NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF. ONLY
- RATING: 2A @ 36VDC
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- INSULATION RESISTANCE: 1,000MΩ @ 500VDC
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 200,000 CYCLES
- CONTACT MATERIAL: SILVER
- OPERATING TEMPERATURE: -20°C TO 55°C
- INGRESS PROTECTION: IP65
- LED VOLTAGE: BASE VOLTAGE 2.8V TYP.
- ▲ DENOTES CRITICAL PARAMETER
- HARDWARE INCLUDED: HEX NUT AND O-RING (NOT SHOWN)

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-100079	RELEASE	05/06/21	JM	TITLE PV0H24011-201				100116557
					SCALE	DATE	DR	DWG	REV
					2:1	5/5/2021	JM	52-PV0H24011201	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED