





SWITCH	WIRE	LENGTH
SW1-1	WIRE, 22 AWG AWM UL1007, BLUE	300.0 [11.8 in]
SW1-2	WIRE, 22 AWG AWM UL1007, WHITE	300.0 [11.8 in]
SW1-(+)	WIRE, 22 AWG AWM UL1007, RED	300.0 [11.8 in]
SW1-(-)	WIRE, 22 AWG AWM UL1007, BLACK	300.0 [11.8 in]

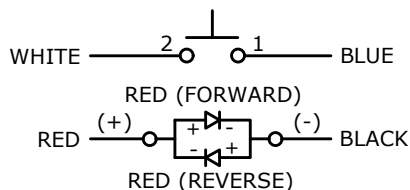

SCHEMATIC
 OFF - (ON) - SPST ILLUMINATED
 () DENOTES MOMENTARY FUNCTION



RECOMMENDED PANEL CUTOUT
 MAX. PANEL THICKNESS 6.0 [.24 in]

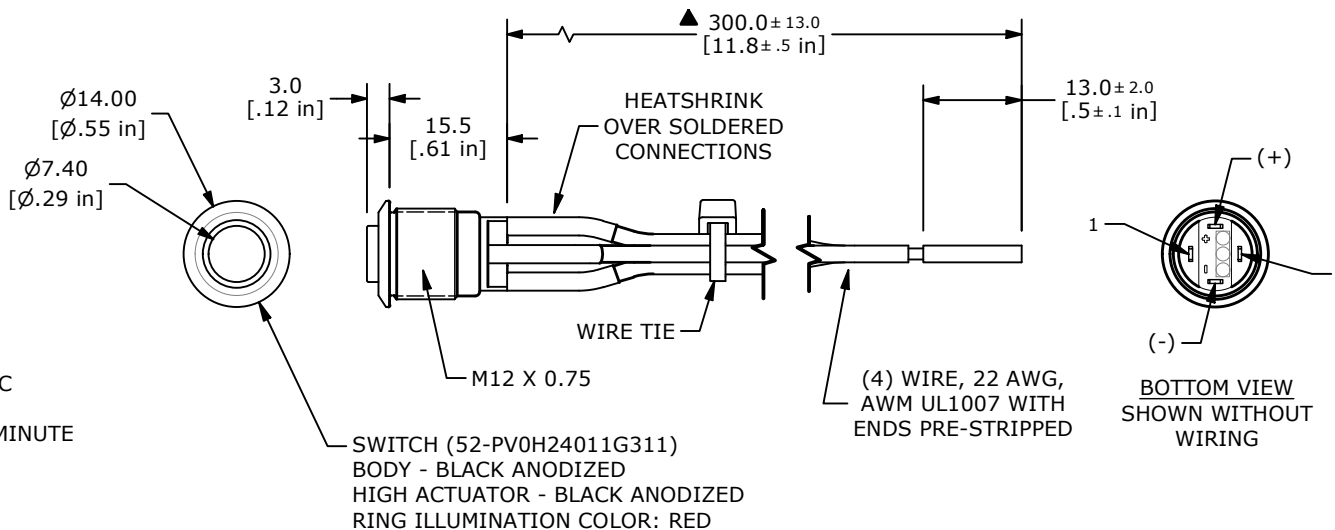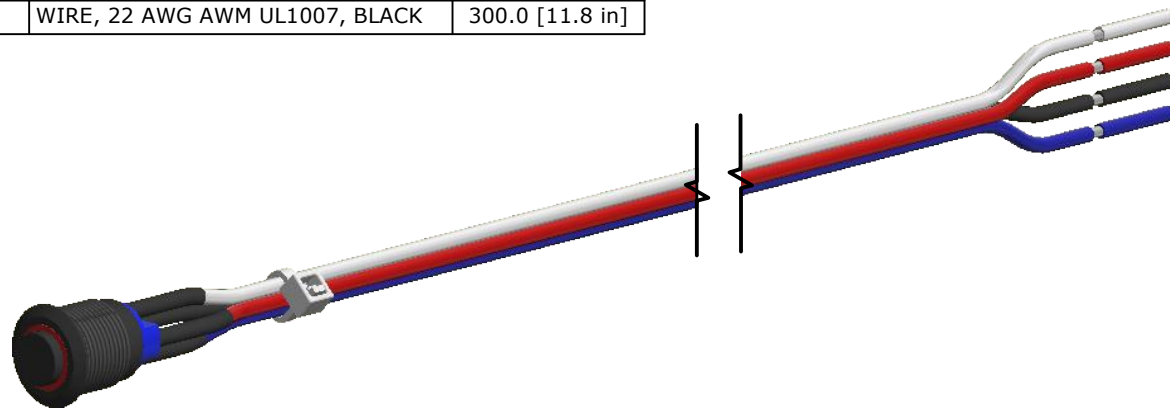

- NOTE:
- ALL DIMENSIONS IN MM [INCH]
 - GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 - TERMINAL NUMBERS FOR REF. ONLY
 - RATING: 2A @ 36VDC
 - CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
 - INSULATION RESISTANCE: 1,000MΩ @ 500VDC
 - DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
 - ELECTRICAL LIFE: 200,000 CYCLES
 - ▲ CONTACT MATERIAL: GOLD
 - OPERATING TEMPERATURE: -20°C to 55°C
 - INGRESS PROTECTION: IP65
 - ▲ LED VOLTAGE: BASE VOLTAGE 1.8V TYP.
 - ▲ DENOTES CRITICAL PARAMETER.
 - SUPPLIED HARDWARE: O-RING AND HEXNUT
 - USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

		OBJECT ID 000002310
TITLE PV0HW4011G-311		
SCALE 1:1	DATE 7/6/2020	DR MW
DWG 52-PV0HW4011G311		REV B

REV	PCR NO	DESCRIPTION	DATE	BY
B	24583	HOUSING UPDATE TO SWITCH	11/9/20	JM
A	24376	RELEASE	7/8/20	MW

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED