
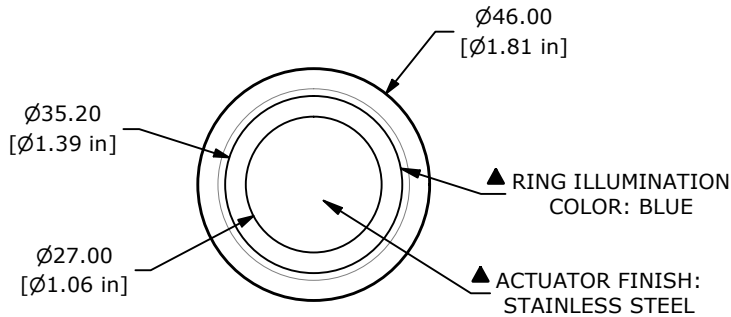
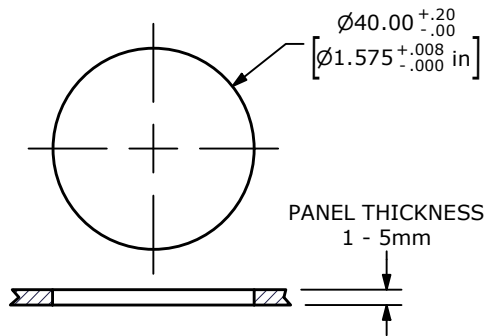



SWITCH FUNCTION	
POS. 1	POS. 2
	
1-2 ON 3-4 OFF	1-2 OFF 3-4 ON




▲ SPDT ON-OFF / OFF-ON
CONTACT CONFIGURATION

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. FUNCTION: SPDT
- ▲ 5. RATING: 2A @ 48VDC
6. CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
7. INSULATION RESISTANCE: 1,000MΩ @ 500VDC
8. DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
9. ELECTRICAL LIFE: 50,000 CYCLES
10. OPERATING TEMPERATURE: -20°C to 55°C
11. INGRESS PROTECTION: IP65
12. SUPPLIED HARDWARE: O-RING AND HEXNUT
13. ▲ DENOTES CRITICAL PARAMETER
- ▲ 14. ILLUMINATION VOLTAGE: 125V

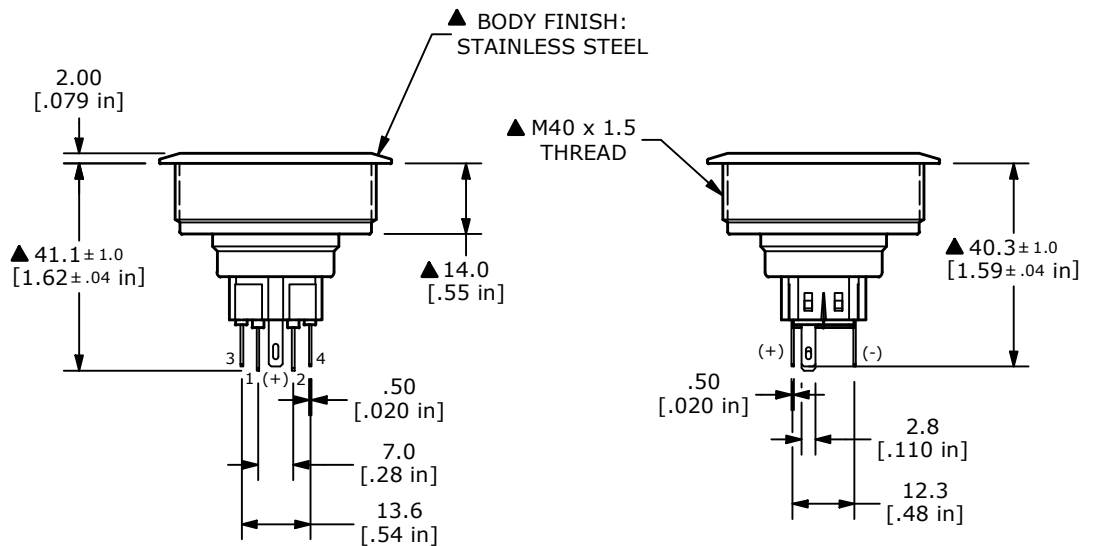

DOT DENOTES
LED COLOR



C	24607	HOUSING UPDATE	11/23/20	JM	 E-SWITCH®				
B	23818	correct function to latching	3/22/19	MW					
A	23779	NEW RELEASE	2/19/19	MW	TITLE PV10F2T0SS-346				
REV	PCR NO	DESCRIPTION	DATE	BY					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:3	DATE 2/19/2019	DR MW	DWG 52-PV10F2T0SS346	REV C