


▲ SWITCH FUNCTION

POS. 1	POS. 2
1-2 ON 3-4 OFF	1-2 (OFF) 3-4 (ON)





▲ DPDT ON (OFF) / OFF (ON)  
CONTACT CONFIGURATION  
 ( ) DENOTES MOMENTARY


( ) = MOMENTARY

NOTE:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
- TERMINAL NOS. FOR REF. ONLY
- RATING: 2A @ 48VDC
- CONTACT RESISTANCE: 50mΩ MAX. @ 1A 12VDC
- INSULATION RESISTANCE: 1,000MΩ @ 500VDC
- DIELECTRIC STRENGTH: 2,000VAC MIN. FOR 1 MINUTE
- ELECTRICAL LIFE: 50,000 CYCLES
- OPERATING TEMPERATURE: -40°C TO 85°C
- INGRESS PROTECTION: IP65
- ▲ 11. SUPPLIED HARDWARE: O-RING AND HEXNUT
- ▲ 12. ▲ DENOTES CRITICAL PARAMETER
- ▲ 13. ILLUMINATION VOLTAGE: 2.8V

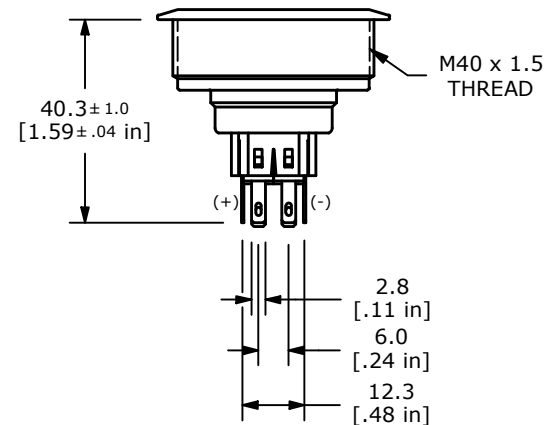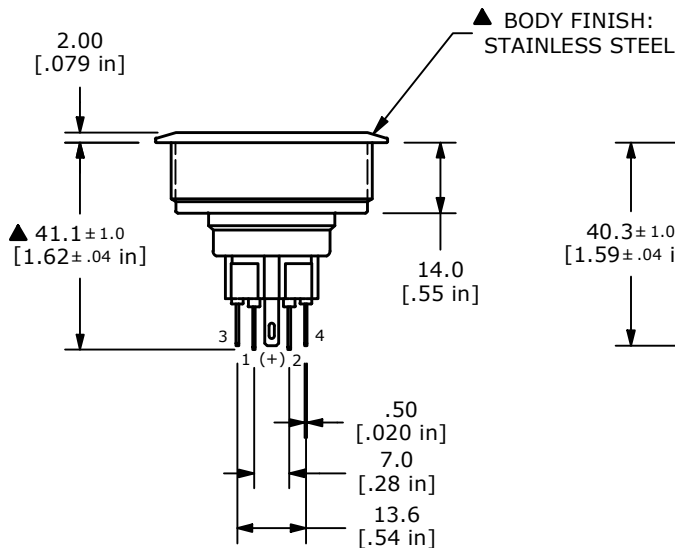

DOT DENOTES LED COLOR



REV	ECO NO	DESCRIPTION	DATE	BY
C	ECO-103428	TEMP CHANGE -40C TO 85C WAS -20C TO 55C	08/05/25	JS



OBJECT ID  
000002320

TITLE PV10F2V0SS-341				
SCALE 2:3	DATE 8/13/2018	DR MJR	DWG 52-PV10F2V0SS341	REV C