



$\varnothing 16.00^{+.20}_{-.00}$
 $[\text{.630}^{+.008}_{-.000} \text{ in}]$



PANEL CUTOUT
 MAX. PANEL THICKNESS 6.0mm

$\varnothing 18.00$
 $[\text{.71 in}]$

$\varnothing 12.00$
 $[\text{.47 in}]$




▲ BODY
 STAINLESS STEEL





SWITCH FUNCTION	
POS. 1	POS. 2
OFF	(ON)
OPEN	1-2

(ON) = MOMENTARY



NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
 X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: SILVER
5. RATING: 2A 48VDC
6. TRAVEL: $1.5 \pm 0.2\text{mm}$
7. ELECTRIC LIFE: 200,000 MAKE-AND-BREAK CYCLES
8. INSULATION RESISTANCE: 1,000 M Ω MIN.
9. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
10. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
11. OPERATING TEMP.: -20°C to 55°C
12. ▲ DENOTES CRITICAL PARAMETER
13. INGRESS PROTECTION: IP65
14. HARDWARE SUPPLIED: O-RING AND HEXNUT

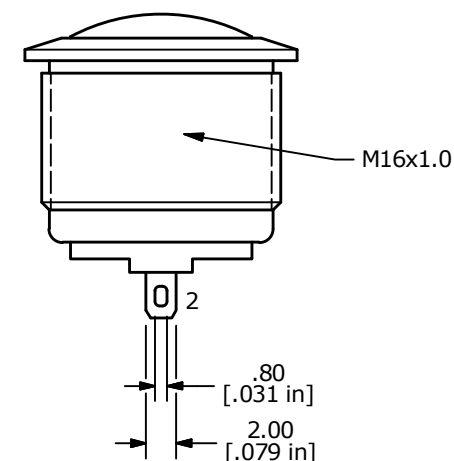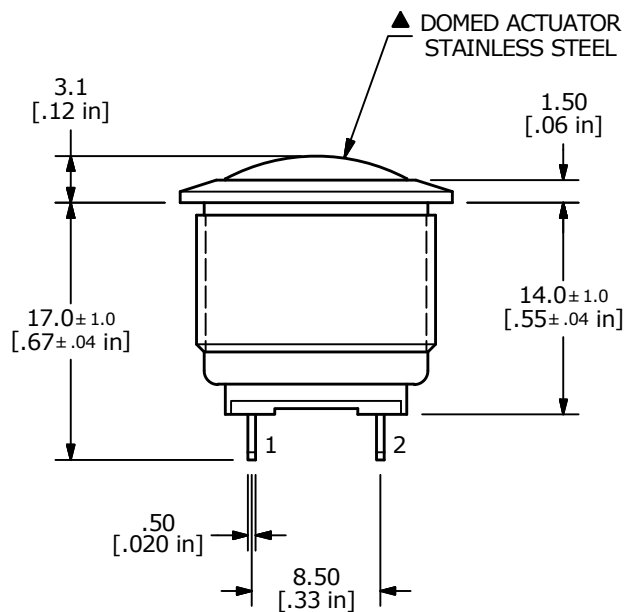

TITLE PV2S240SS

A	23933	New Release	6/17/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
 TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 2:1	DATE 6/17/2019	DR MW	DWG 52-PV2S240SS	REV A
--------------	-------------------	----------	---------------------	----------