



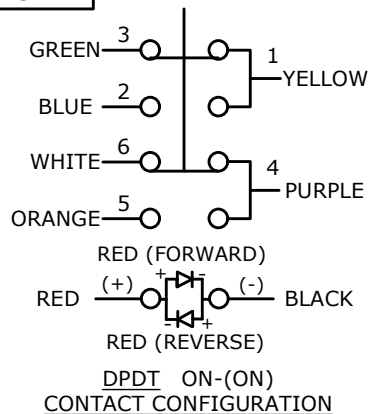



SWITCH	WIRE	LENGTH
SW1-1	WIRE, 22AWG AWM UL1007, YELLOW	300.0 [11.8 in]
SW1-2	WIRE, 22AWG AWM UL1007, BLUE	300.0 [11.8 in]
SW1-3	WIRE, 22AWG AWM UL1007, GREEN	300.0 [11.8 in]
SW1-4	WIRE, 22AWG AWM UL1007, PURPLE	300.0 [11.8 in]
SW1-5	WIRE, 22AWG AWM UL1007, ORANGE	300.0 [11.8 in]
SW1-6	WIRE, 22AWG AWM UL1007, WHITE	300.0 [11.8 in]
SW1- (+)	WIRE, 22AWG AWM UL1007, RED	300.0 [11.8 in]
SW1- (-)	WIRE, 22AWG AWM UL1007, BLACK	300.0 [11.8 in]



RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 8.0 [.31 in]

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
- ▲ 4. CONTACT MATERIAL: GOLD
5. RATING: 2A 48VDC
- ▲ 6. LAMP VOLTAGE: 6V
7. INGRESS RATING: IP67
8. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES AT FULL LOAD.
9. INSULATION RESISTANCE: 1,000 M Ω MIN.
10. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
11. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
12. OPERATING TEMP.: -20°C to 55°C
13. ▲ DENOTES CRITICAL PARAMETER.
14. SUPPLIED HARDWARE: O-RING AND HEXNUT
- ▲ 15. USE PART NUMBERS DESIGNATED OR ENGINEERING APPROVED EQUIVALENTS.

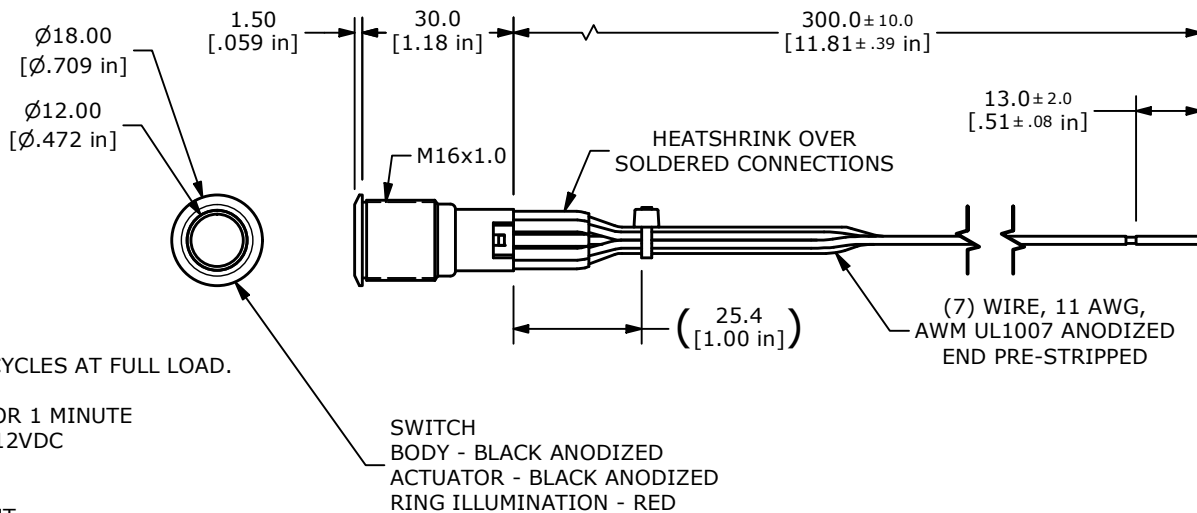

REV	ECO NO	DESCRIPTION	DATE	BY					OBJECT ID
A	ECO-102495	RELEASE	01/25/24	JS	TITLE PV3WFWH011G-313				100126662
					SCALE 2:3	DATE 1/22/2024	DR JS	DWG 52-PV3WFWH011G313	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED